


DN 7000™ Series

Multiservice Edge Switching and Aggregation Platform

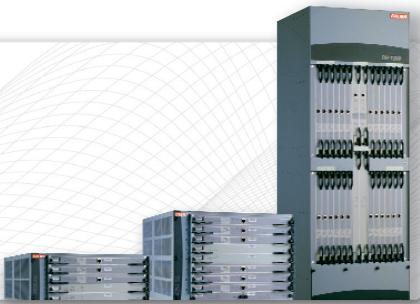

Ciena's DN 7000 series multiservice edge products offer a wide spectrum of cost-effective Ethernet- and IP/MPLS-based service delivery, from modern data-aware access networks to the edge of the IP/MPLS core.

With the DN 7000 series, service providers can deploy solutions appropriate to customer demand and service area density at a lower cost than any other product on the market today. The DN 7000 series delivers Ethernet, IP/MPLS, ATM, Frame Relay, and TDM aggregation and switching on a single platform, so service providers can facilitate the convergence of new and existing services and networks onto Ethernet- and IP/MPLS-based architectures while protecting their current Layer 2 investments.

The DN 7000 series is highly reliable, scalable, and cost-effective. It delivers six-9s reliability through its telephony-grade operating system, enabling in-service software upgrades and downgrades without disruption. It features industry-leading scalability via significant increases in port, Pseudowire Emulation Edge-to-Edge (PWE3), Virtual Circuit (VC), and Label-Switched Path (LSP) densities and processing power. The series' compact design minimizes space and power requirements by consolidating multiservice switching onto a single chassis rather than deploying multiple products, thus reducing continuing costs and deployment to provide substantial capital and operations savings.

The DN 7000 series enables migration to Ethernet and IP/MPLS with advanced Ethernet interworking and multiservice

pseudowires. Service providers can expand their addressable market, reach and availability for Ethernet by utilizing advanced Ethernet service and network interworking with traditional Layer 2 customers and networks. In addition, the DN 7000 series' multiservice pseudowires facilitate convergence by enabling new Ethernet service delivery and seamless Frame Relay, ATM and TDM migration onto an IP/MPLS core.

The three models of the DN 7000 series share common hardware and software, decreasing sparing requirements and simplifying system operation and management. Through software-only configuration and dual control planes (MPLS and/or ATM), the series' multiservice interfaces can be independently provisioned to run in Ethernet, IP/MPLS, and/or ATM modes. The DN 7000 series supports a wide variety of interface types that scale from DS0 to OC-48/STM-16 as well as 10/100 and Gigabit Ethernet speeds.

The DN 7000 series addresses the requirements of Triple Play aggregation, business data services and fixed/mobile convergence applications including:

- Layer 2 MPLS VPNs using pseudowires (Ethernet, TDM, Frame Relay, and ATM)
- Any-to-Any Ethernet service and network interworking with Frame Relay and ATM
- Converged 2G/3G mobile voice and data radio-access networks via TDM, ATM and/or pseudowire-based backhaul
- Gigabit Ethernet and/or ATM-based broadband services aggregation (DSL/FTTx)

Features & Benefits

- Delivers 99.9999 percent carrier-class reliability to improve service level agreements and customer satisfaction
- Processes any service on any port, allowing faster service delivery, reduced capital expenditures and ease of sparing
- Features a small footprint, which reduces operations expenses
- Offers industry-leading port density and granular scalability from 2.5 Gb/s to 40 Gb/s
- Provides industry-proven inter-operability with existing service provider Operations Support Systems (OSSs) and practices
- Supports high subscriber-density and traffic volumes, processing up to 128,000 pseudowires, VCs or LSPs per port, and up to 800 calls-per-second per module
- Enables rapid provisioning, monitoring, troubleshooting and standards-based OSS integration through Ciena's ON-Center DN 7000 Manager

Technical Information

Capacity and Subscriber Densities

Model	Forwarding Modules	Port Adapters	VCs (Ethernet, FR, ATM)/LSPs/PWE
DN 7050®	3 slots	4 full or 8 half slots	256,000
DN 7100	6 slots	8 full or 16 half slots	512,000
DN 7200	24 slots	32 full or 64 half slots	2,048,000

Services and Application Software

Ethernet	IP/MPLS
IEEE 802.3	OSPF, OSPF-TE
IEEE 802.1p	ISIS, ISIS-TE
IEEE 802.1q/d Bridging	RSPV-TE, LDP
IEEE 802.3ad Link Aggregation	IETF Pseudowires (PWE3/Draft Martini) for Ethernet, TDM, FR/ATM
IEEE 802.1ad Provider Bridging	LER/LSR Functionality
IEEE 802.3x Flow Control	LSP Hot Standby
Q in Q VLAN Stacking	MPLS Fast Reroute
ARP Mediation	LSP Ping
Advanced Ethernet Service Interworking with FR/ATM	LSP Traceroute
	Virtual Circuit Connection Verification (VCCV)
ATM	Frame Relay
UNI UNI>NNI 3.x/4.0	FRF.1.2
ILMI 4.0	LMI Rev.1/Annex D/Annex A
PNNI 1.0 (Hierarchical)	FRF.2.1 NNI
AINI	FRF.5 FR/ATM Network Interworking
IISP 1.0	FRF.8 FR/ATM Service Interworking
TM 4.0	FRF.12 FR Fragmentation
IMA 1.0/1.1	FRF.13 Service Level Definitions
ATM-MPLS Interworking 1.0	FRF.16 Multilink FR
IETF RFC 1483/2684 Multi-protocol Encapsulation	FRF.19 FR OAM
	IETF RFC 1490/2427 Multi-protocol Encapsulation

Interfaces

Ethernet	Multiservice	ATM	Frame Relay/IP
4 port 10/100/1000 (Gigabit) Ethernet	1 port OC-48c/STM-16 ATM/POS 1 port/4 port OC-12c/STM-4 ATM/POS 2 port/4 port/12 port OC-3c/ STM-4 ATM/POS	24 port T1/E1 ATM/IMA/CES 3 port/4 port/9 port/12 port DS-3 3 port E3 3 port CH DS3/1 ATM/IMA 3 port CH DS3/1/0 CES 1 port CH OC-3/STM-1 ATM/IMA	3 port CH OC-3/STM-1 FR/IP 3 port/9 port CH DS-3/1/0 FR/IP 24 port T1/E1 FR/IP

Power Requirements

Operating Voltage Range -40V to -72V DC

Environmental Characteristics

Operating Temperature	0° C to +50° C (+32° F to +122° F)
Safety	UL Listed, UL 60950, UL Certified (Canada) - CSA C22.2 no. 60950 IEC 60950 and CB Scheme Certificate, EN 60950 3rd edition
NEBS Level 3	GR-1089-CORE; GR-63-CORE
Environmental	Verizon® RNSA-NEB-95-0003, Verizon SIT.NEBS.TE.NPI.2000.004, Version 1 SBC TP76200MP; AT&T® NEDS, EN 300-019 EN 6000 series, FCC part 15, Class A, ICES 003, CISPR Class A EN55022: 1998 Class A, EN 300386-2 1997; EN50082-1 1997
EMI	EMC Directive (89/336/EEC), Low Voltage Directive (73/23/EEC) OSMINE integration for TIRKS® and NMA®, Telcordia™ Network Configuration Manager
CE Mark	
Certification	

Technical Information

Physical Characteristics

Model	Consumption	Height	Width	Depth
Height	15.02 in (382 mm)	15.02 in (382 mm).....	10.94 in (278 mm)	10.94 in (278 mm)
Width	1.96 in (498 mm)	0.98 in (25 mm).....	0.98 in (25 mm)	0.98 in (25 mm)
Depth	9.63 in (245 mm)	9.63 in (245 mm).....	9.63 in (245 mm)	9.63 in (245 mm)
Weight4 lbs; (1.81 kg).....	2 lbs; .91 kg	1.9 lbs; .85 kg	1.8 lbs (.82 kg)
Rack Mounting	Mid or front mount 19" (482.6 mm) telco rack, standard 23" (584.2 mm) telco rack (with optional ears)			



Specialising in transition to
service-driven networks to help you
change the way you compete.

1201 Winterson Road
Linthicum, MD 21090
1.800.207.3714 (US and Canada)
1.410.865.8671 (outside US)
+44.20.7012.5555 (international)
www.ciena.com