

WIDEBAND 3190 INSTALLATION AND VERIFICATION GUIDE



HMS-358 List 5 (Split Power)
Product: HMS-358-L5
CLEI Code: VAMXKG0F

HMS-358 List 6 (Redundant Power)
Product: HMS-358-L6
CLEI Code: VAMXKH0F



Revision History of This Document

Copies of this document, LTPH-SM-1052-05, can be downloaded from the ADC web site at www.adc.com. To order a hard copy, please see your sales representative.

Issue	Release Date	Revisions Made
1	May 8, 2001	Initial release.
2	August 8, 2001	Updated Connecting to the Network Interface and Environmental Specifications.
3	November 30, 2001	Added new Appendix B, "HMU Configuration for X.25 and Ethernet Connections".
4	July 14, 2002	Updated line card shelf count specifications.
5	March 9, 2007	Updated Power Requirements in Appendix A – System Specifications.

Copyright

March 9, 2007

© 2007 ADC Telecommunications, Inc. All rights reserved.

Trademark Information

ADC and HiGain are registered trademarks of ADC Telecommunications, Inc. No right, license, or interest to such trademarks is granted hereunder, and you agree that no such right, license, or interest shall be asserted by you with respect to such trademark. Other product names mentioned in this document are used for identification purposes only and may be trademarks or registered trademarks of their respective companies.

Disclaimer of Liability

Information contained in this document is company private to ADC Telecommunications, Inc., and shall not be modified, used, copied, reproduced or disclosed in whole or in part without the written consent of ADC.

Contents herein are current as of the date of publication. ADC reserves the right to change the contents without prior notice. In no event shall ADC be liable for any damages resulting from loss of data, loss of use, or loss of profits, and ADC further disclaims any and all liability for indirect, incidental, special, consequential or other similar damages. This disclaimer of liability applies to all products, publications and services during and after the warranty period.

CONVENTIONS USED

The following conventions are used in this document:

- Monospace type indicates screen text.
- Keys you press are indicated by small icons such as **Y** or **ENTER**. Key combinations to be pressed simultaneously are indicated with a plus sign as follows: **CTRL** + **ESC**.
- Items you select are in **bold**.
- Three types of messages, identified by icons, appear in text.



Notes contain information about special circumstances.



Cautions indicate the possibility of personal injury or equipment damage.



The Electrostatic Discharge (ESD) symbol indicates that a device or assembly is susceptible to damage from electrostatic discharge.

ABOUT THIS GUIDE

This guide details a typical step-by-step Wideband 3190 system installation and provides for a final system verification. For detailed information about specific system components, refer to the documentation for that component.

An abbreviated version of the installation and verification procedure for each configuration is located at the end of this guide (see “[Project Member Signatures](#)” on page 91). You can pull out the checklist from this guide, verify the installation, sign where appropriate, and file the list in a safe place.

RELATED DOCUMENTATION

Catalog Number	Title
LTPH-UM-1044-xx	HXU-358-V104 Multiplexer User Manual
LTPH-UM-1127-xx	HXU-359 List 2 (Version 1.1) Multiplexer User Manual
LTPH-UM-1089-xx	HXU-360 List 1 Multiplexer User Manual
150-357-100-xx	HFA-357 List 1 Fan Assembly Unit Quick Installation Guide
100-319-200-xx	HTC-319 List 1 Test Card Quick Installation Guide
350-319-200-xx	HCC-319 List 1 Cut-through Card Quick Installation Guide
350-319-201-xx	HCC-319 List 2 Cut-through Card Quick Installation Guide
LTPH-UM-1086-xx	HMU-319 List 7A and List 9 (Version 3.07) Management Unit User Manual
LTPH-UM-1142-xx	HMU-319 User Manual (Version 3.1) Management Unit User Manual
LTPH-TP-1026-xx	HLU-319 List 5x Line Unit Technical Practice
LTPH-TP-1172-xx	H2TU-C-319 List 2x Line Unit Technical Practice
LTPH-UM-1031-xx	H4TU-C-319 List 1 Line Unit User Manual
350-409-100-02	HDU-409 Doubler Unit Quick Installation Guide
350-407-102-02	HDU-407 Doubler Unit Quick Installation Guide
350-404-102-02	HDU-404 List 2 Doubler Unit Quick Installation Guide
LTPH-UM-1120-xx	H4D-409 List 1 Doubler Unit Quick Installation Guide
LTPH-TP-1024-xx	HRU-402 List 4 Remote Unit Technical Practice
LTPH-QI-1150-xx	H2TU-R-402 List 5x Remote Unit Quick Installation Guide
LTPH-QI-1033-xx	H4TU-R-402 Remote Unit Quick Installation Guide



For information about line units, doublers, and remote units, refer to the appropriate documentation for the product model number. Copies of documents can be downloaded from the ADC web site at www.adc.com. To order a hard copy, please see your sales representative.

SAFETY WARNINGS AND NOTICES



The DC power supply feeds of the enclosure must be connected to either (1) -48 Vdc Safety Extra Low Voltage (SELV) sources or (2) -48 Vdc sources that are electrically isolated from the AC sector and reliably connected to earth. The source's fault current capacity shall be lower than 30A, or an appropriate overcurrent protection, rated 30A, must be provided on each -48 Vdc conductor. The overcurrent protection can also be used as a cut-off switch if another disconnect device is not installed.



This equipment may be provided with a module that incorporates laser source(s). Refer to the module's documentation for detailed safety information.



The telemetry In/Out (I/O) must be connected to either a SELV source or an ELV source that is electrically isolated from the AC sector and reliably connected to earth.



The metallic telecommunication interface should not leave the building premises unless connected to telecommunication devices providing primary and secondary protection.

AVIS ET AVERTISSEMENTS DE SÉCURITÉ



Les alimentations CC du boîtier doivent être branchées soit (1) à des sources 48 Vcc TBTS ou (2) à des sources qui sont isolées électriquement du secteur ca et qui sont reliées à la terre de façon fiable. Le courant de faute des sources doit être inférieur à 30 A ou des protections appropriées contre les sur-courants, spécifiée 30 A doivent être installées sur chaque conducteur -48 Vcc. La protection sur-courant doit aussi servir d'interrupteur si un interrupteur n'est pas installé.



Cet équipement peut être fourni avec des modules qui peuvent contenir des sources LASER. Se référer à la documentation du module pour plus d'information.



Les E/S de télémétrie doivent être branchées soit (1) à une source TBTS ou (2) à une source qui est isolée électriquement du secteur ca et qui est reliée à la terre de façon fiable.



Les interfaces métalliques de télécommunication ne doivent pas quitter le bâtiment à moins d'être reliés aux dispositifs de télécommunication assurant la protection primaire et secondaire.

TABLE OF CONTENTS

Introduction	1
Document Scope	1
System Overview	2
Before You Begin	4
Reviewing Installation Plans.....	4
Establishing a Method of Procedure	4
Unpacking and Inspecting the System Components.....	5
Mounting the Chassis	6
Cabling the Chassis	8
Drain Wire and Cable Tie Installation	8
Cable Connector Pinouts.....	9
Selecting the Proper Installation Procedures	11
Installing Interface Cables—DS3 or STS-1 to DSL	12
Installing Interface Cables—DSX-1 to DSL (Port 1)	13
Installing Interface Cables—DSX-1 to DSL (Port 2)	14
Wiring the Common Access Panel	15
Installing the Power Cables	17
Connecting the Network Interface	20
Setting Up a Multishelf 10BASE-T Configuration	23
Setting up a 10BASE-2 Configuration	24
Multishelf 10BASE-2 Configuration	24
Management Over an X.25 Network	25
Installing a Management Unit (HMU)	26
Connecting a Local Maintenance Terminal	27
Using the Terminal Access Option	28
Configuring the Management Unit	30
Setting the HMU Date and Time (Option H)	31
Setting the Shelf Identifier (Option D)	31
Setting the Local IP Address (Option A).....	32
Setting the Ethernet Connection (Option G)	32
Installing Multiplexers	33
Selecting the Proper Installation Procedures	33
Installing the HXU-358 or HXU-360 Multiplexer Card.....	34
Setting Up Basic System Parameters Through the Config Menu	35
Entering the Card ID (System Name) Through the Config Menu	37

Configuring DS1 Services Through the Config Menu	39
Configuring the DS3 Transport Through the Config Menu	41
Installing the HXU-359 Multiplexer Card	43
Setting Up Basic System Parameters Through the Config Menu	44
Entering the Card ID (System Name) Through the Config Menu	45
Setting the System Clock Synchronization Through the Config Menu	47
Configuring DS1 Services Through the Config Menu	49
Configuring the STS-1 Transport Through the Config Menu	51
Installing a Fan Assembly (Optional).....	53
Placing the Fan Under HMU Management.....	54
Installing a Line Unit (HLU).....	55
Installing a Remote Unit (HRU).....	57
Setting Up Circuit IDs.....	59
Placing the Line in Service.....	60
Placing the HLU Under HMU Management	60
Placing the Line Unit in Service at the HXU.....	61
Troubleshooting and System Testing	65
Installing a Test Card (HTC) (Optional)	66
Installing a Cut-Through Card (HCC) (Optional).....	67
Line Unit Testing.....	68
Verification Without a Downstream Device.....	68
Verification With a Downstream Device.....	68
Managing Alarms	69
HMU Alarms	69
HXU Alarms.....	70
Line Unit Alarms.....	71
Network Communications	72
Network Protocol.....	72
Hardware Addresses and IP Addresses	72
Subnet Mask	73
Routers or Gateways.....	73
Appendix A - System Specifications	74
Interface Specifications	74
Environmental Specifications.....	75
Physical Specifications.....	75
Power Specifications	75
Power Requirements.....	76

A/B Power Sources	77
Fuses.....	77
Fans	79
Appendix B - HMU Configuration for X.25 and Ethernet Connections	80
Operating Modes.....	80
Interactive Mode.....	80
NMA Mode.....	80
X.25 Port Configuration Procedure	80
X.25 Port Configuration Using Craft Screens	80
X.25 Configuration Using TL1 Commands.....	81
X.25 Parameter Configuration.....	82
Additional X.25 Parameter Configuration.....	83
Ethernet Port Configuration Procedure	83
Appendix C - Optional Wire-Wrapping Port Connections	84
Appendix D - Technical Reference	86
System Components and Compatibility.....	86
Compliance Standards.....	87
Appendix E - Product Support	88
Appendix F - Abbreviations	89
Index	97
Certification and Warranty	Inside Back Cover

LIST OF FIGURES

1. Wideband 3190.....	2
2. Outside Plant Service Model.....	3
3. Mounting the Wideband 3190 in a CO Rack	6
4. Installing the Drain Wire and Cable Tie for all Amphenol Connectors.....	8
5. 50-foot (16/16 or 25/7) or 200-foot (16/16 or 25/7) Cable Connectors	9
6. Selecting the Proper Tabbed Section for Your Shelf Configuration.....	11
7. Installing Cables for a DS3 or STS-1 Configured Shelf (Backplane View).....	12
8. Installing Cables for a DSX-1 Configured Shelf (Backplane View)	13
9. Installing Cables for a DSX-1 Configured Shelf (Backplane View)	14
10. Common Access Panel.....	15
11. Grounding the Chassis (Right-Hand Side, Rear View).....	17
12. Opening the Ferrite and Routing the Battery Feed Wires (Right-Hand Side, Rear View).....	18
13. Network Interface Connections.....	20
14. Multishelf 10BASE-T Configuration.....	23
15. Multishelf 10BASE-2 Configuration	24
16. Installing an HMU.....	26
17. Connecting a Maintenance Terminal to the HMU Craft Port	27
18. Multishelf Configuration Sample.....	29
19. Single-Shelf Configuration Sample.....	29
20. Selecting the Proper Tabbed Section for Your Multiplexer.....	33
21. Installing an HXU-358 or HXU-360.....	34
22. Config Menu for the HXU-358	35
23. Config Menu for the HXU-360	35
24. Setting the Card ID Through the HXU-358	37
25. Setting the Card ID Through the HXU-360	37
26. Setting the T1/E1 Ports through the HXU-358 or HXU-360.....	39
27. Setting the DS3 Port Through the HXU-358 or HXU-360.....	41
28. Installing an HXU-359	43
29. Setting the Date and Time Through the HXU-359	44
30. Setting the Card ID Through the HXU-359	45
31. Setting the Clock Configuration Through the HXU-359	47
32. Setting Up DS1 Services Through the HXU-359	49
33. Setting Up the STS-1 Transport Through the HXU-359	51
34. Installing the Fan Assembly (Cover Down).....	53
35. Installing a Line Unit into the Wideband 3190 Chassis.....	55
36. Securing the Modules with the Retention Bar.....	56

37. Installing an HRU in a Remote Enclosure	57
38. System Loopbacks and Test Access	65
39. Installing a Test Card into the HMS-358	66
40. Installing a Cut-Through Card into the HMS-358	67
41. Common Access Panel (Specification).....	74
42. Typical Six-Lineup Floor Plan.....	76
43. Bay Heating Based on Doublers per Chassis.....	79
44. Wire-Wrapping the HMS-358 List 5 and List 6 Chassis	84
45. Routing Cables Under the Field Access Cover.....	85

LIST OF TABLES

1. Packing List.....	5
2. System Installation Notes.....	5
3. Cable Connector Pinout and Color Code (16/16 Cable).....	10
4. Cable Connector Pinout and Color Code (25/7 Cable).....	10
5. J32 Pinouts for 10BASE-2 Interface.....	20
6. J34 Pinouts for 10BASE-T Interface.....	21
7. J30 Pinouts for DB-25 (Female Connector) OS Interface (DTE).....	21
8. J31 Pinouts for DB-25 (Female Connector) AUX Interface (DTE).....	22
9. System Loopback Definitions	65
10. Line Unit Alarm Messages.....	71
11. Network Addressing.....	72
12. Sample Class C IP Address Plan for the HMS-358	73
13. Relay Specifications	74
14. HMS-358 List 5 Split Power Shelf*.....	78
15. HMS-358 List 6 Redundant Power Shelf.....	78
16. CUP Parameters Line Descriptions.....	82
17. System Components	86
18. Compliance Standards.....	87
19. Signatures	91

INTRODUCTION

DOCUMENT SCOPE

This guide provides basic step-by-step instructions for installing several different shelf configurations and establishing a working Wideband 3190 system. Once you have completed the basic installation and verified that your system is functioning properly, you can refer to the user manuals for the individual components. The user manuals provide comprehensive configuration and technical information that will help you further define system parameters to meet your particular system requirements.

To use this guide:

- Follow the steps provided in the order of their presentation, beginning with the section entitled “[Before You Begin](#)” on page 4.
- Tabbed sections are provided for chassis cabling and multiplexer installations. Based upon your choice of multiplexer and chassis configuration, select the sections that apply to your system installation.
- Place a check mark after each installation task you complete and then sign your name in the places indicated after each section you complete.



This is a basic installation guide that is designed to aid you in successful installation of the Wideband 3190 system. For more information about the individual components used in this installation procedure, refer to their respective user manuals.



Verify that all equipment to be used in the Wideband 3190 system has met the necessary NEBS and UL requirements. The use of unapproved equipment in the HMS-358 may violate NEBS (GR-1089-CORE, GR-63-CORE) and UL/CSA 1950 standards.

The HMS-358 List 5 and List 6 have been tested and approved for use with all HiGain line units, HMU-319 List 7 management units, and HiGain multiplexers.

SYSTEM OVERVIEW

The Wideband 3190 (HMS-358 List 5 and List 6) combines an industry-standard multiplexer function with a High-bit-rate Digital Subscriber Line (HDSL, HDSL2, or HDSL4) distribution system, providing the lowest-cost T1 delivery system available. The HMS-358 terminates 28 ports and multiplexes them to either 28 discrete DSX-1 interfaces or into a single, high-speed network interface with full metallic and electrical test access on all low speed ports. By selecting the multiplexer card, a variety of high-speed network interfaces, such as DS3 and STS-1, can be accommodated. The use of the same multiplexer and DSL units found in ADC standalone products assures a versatile and cost-effective solution to your system requirements. The open architecture of the HMS-358 supports backward compatibility by accepting any industry-compliant 3192 line card. (ADC recommends that third-party line cards be certified for compliance with a Wideband 3190.)

Figure 1 shows a functional diagram of a Wideband 3190 system. Figure 2 on page 3 shows a typical application.


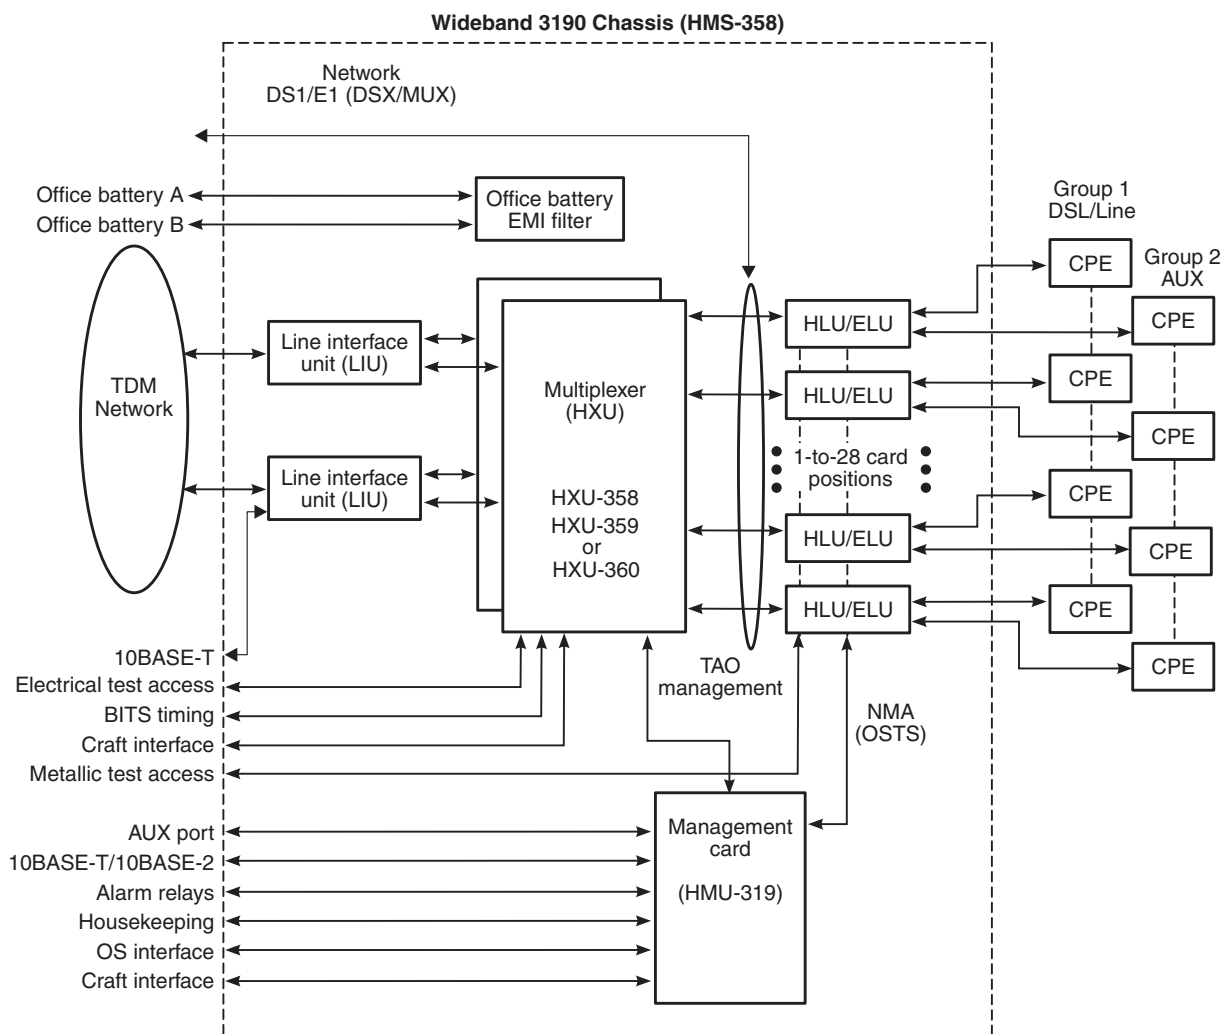


Figure 1. Wideband 3190

For management, both Terminal Access Option (TAO) and Transaction Language 1 (TL1) systems are supported on X.25, 10BASE-T, 10BASE-2, and RS-232 interfaces. The HMS-358 also features standard alarm relay contacts and accepts a redundant A/B office battery source.

The Wideband 3190 system (with a full complement of remote equipment) can be configured with up to six chassis (up to 672 lines) in a 7-foot rack and meets NEBS requirements for CO equipment.

The HMS-358 supports 1+N protection switching at the customer interface and provides facility and equipment protection.

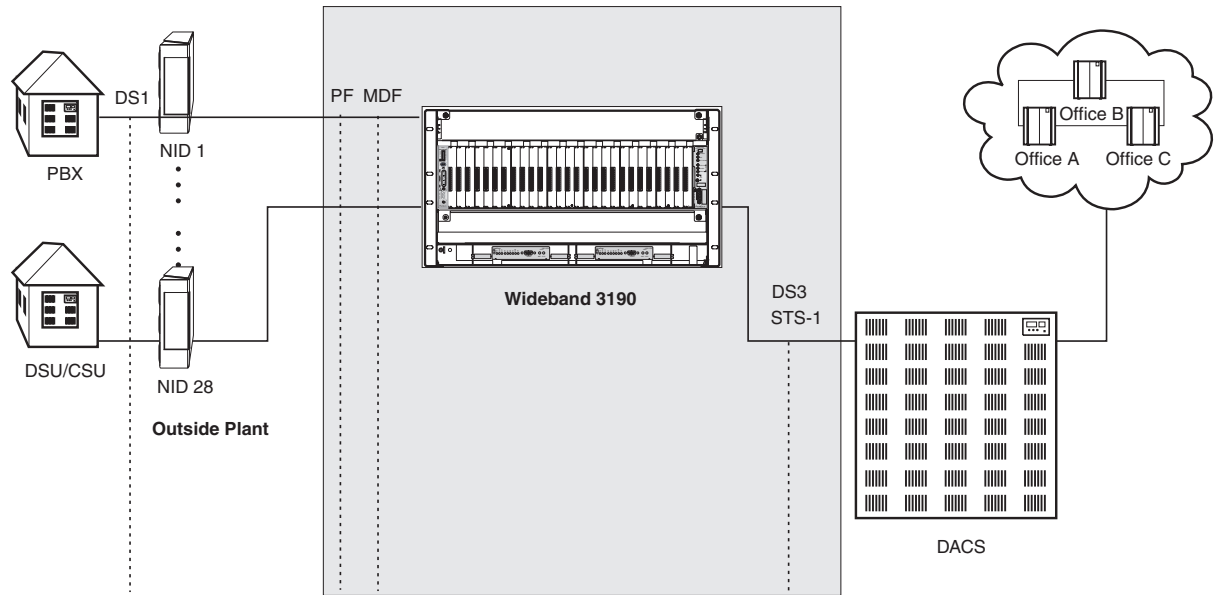

DACS — Digital Access Cross-connect System	NID — Network Interface Device
DS3 — Digital Signal 3	PBX — Private Branch Exchange
DSU/CSU — Digital Service Unit/Channel Service Unit	PF — Protection Frame
MDF — Main Distribution Frame	STS-1 — Synchronous Transport Signal 1

Figure 2. Outside Plant Service Model



Implementation of DS1 protection switching in the HMS-358 requires two HXU-358 multiplexers (software version 1.04 or higher) and an HMU-319 List 7A or List 7C management unit (software version 3.06 or higher). The designated protection line must be comprised of an HLU-316 List 6 or an H2TU-C-319 List 6 line unit and an HRU-402 List 6 or an H2TU-R-402 List 6 remote unit. The remote enclosure must be an HRE-206 List 1 equipped with a PSC-606 List 1 protection switching controller. For information about implementing protection switching, refer to the documentation for the PSC-606 List 1, document number LTPH-TP-1006-xx.

BEFORE YOU BEGIN

Prior to installing the Wideband 3190, it is important to prepare for the installation by:

- Reviewing installation plans through establishing a Method of Procedure (MOP)
- Unpacking and inspecting the system components
- Gathering the tools for the installation

REVIEWING INSTALLATION PLANS

Installation personnel, engineers, and Central Office (CO) supervisors, involved in the installation of the HMS-358, should participate in the preparation of an MOP for approval by CO management.

ESTABLISHING A METHOD OF PROCEDURE

Following is a list of tasks and considerations that need to be addressed and mutually agreed upon before proceeding with installation:

- Assignment of personnel
- Installation tools and methods
- Protection requirements for personnel, equipment, and tools
- Evaluation of potential hazards that may affect service
- Scheduled time for installation
- Space requirements (see [“Power Requirements” on page 76](#))
- Power requirements (see [“Power Requirements” on page 76](#))
- Identification of procedures and tests required before connecting to working equipment
- Identification of work steps and any necessary notifications to CO personnel or engineers before work begins
- Assignment of individual system IDs for up to 32 managed systems (see [“Setting the Shelf Identifier \(Option D\)” on page 31](#))
- Assignment of IP addresses for each installed system (see [“Setting the Local IP Address \(Option A\)” on page 32](#))

UNPACKING AND INSPECTING THE SYSTEM COMPONENTS

Table 1 lists the components shipped with the HMS-358 kit. Unpack and inspect for the contents of the kit for any damage that may have occurred during shipping. After inspecting each unit, sign for each item received. Table 17 on page 86 provides a list of required and optional components that may not be included in the HMS-358 kit, but are either necessary or recommended for the Wideband 3190 system. A notes section (see Table 2) has been provided to document any components not listed below.

Table 1. Packing List

Check ✓	Item	Part Number	Installer Initial ✍
<input type="checkbox"/>	HMS-358 List 5 (split power) or HMS-358 List 6 (redundant power)	1156286 or 1156287	_____
<input type="checkbox"/>	One (1) LIU Module A line interface unit (for DS3 or STS-1)	150-2232-01	_____
<input type="checkbox"/>	Two (2) mounting brackets	202-1684-01A	_____
<input type="checkbox"/>	One (1) male, BNC 50Ω terminator	651-1115-01	_____
<input type="checkbox"/>	One (1) BNC T-adapter connector (J-P-J)	655-1022-01	_____
<input type="checkbox"/>	Eight (8) 6-32 x 3/16 screws	670-1006-03	_____
<input type="checkbox"/>	Two (2) 8-32 x 1/4 screws	670-1009-04	_____
<input type="checkbox"/>	Ten (10) 12-24 x 1/2 screws	670-1017-08	_____
<input type="checkbox"/>	Twelve (12) 4.5-inch x .10-inch cable ties	674-1055-01	_____
<input type="checkbox"/>	One (1) label holder	203-1038-01	_____
<input type="checkbox"/>	One (1) circuit ID label	950-1093-01	_____
<input type="checkbox"/>	One (1) installation and verification guide	1238335	_____
<input type="checkbox"/>	Six (6) 4-40 x 1 3/8 PH. screws	670-1001-22	_____
<input type="checkbox"/>	One (1) ground cable	120-1036-01	_____

Table 2. System Installation Notes

Notes



Be sure to have an IP address ready; it is necessary during installation if the system is connected to Ethernet.

MOUNTING THE CHASSIS

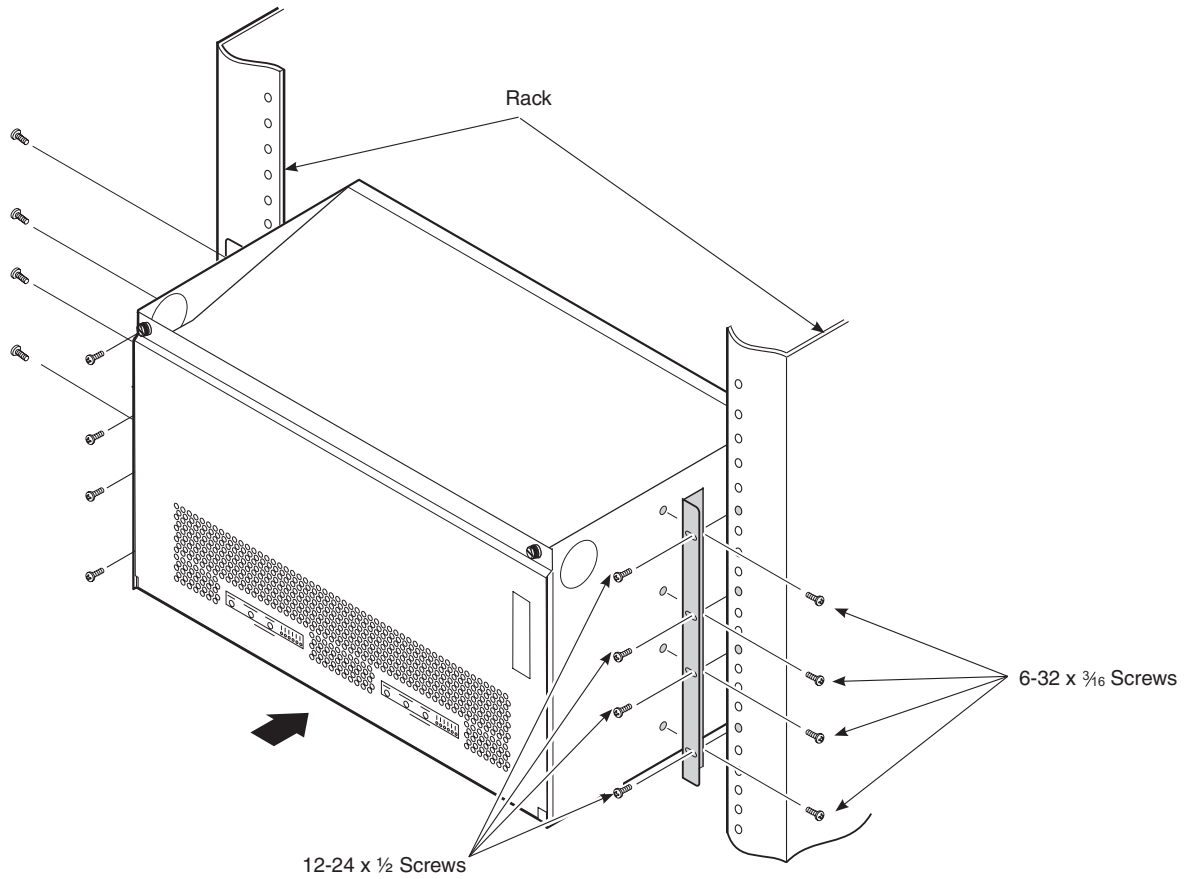


Figure 3. Mounting the Wideband 3190 in a CO Rack



Verify that the battery feed is disconnected.



For single shelf installation only: to fulfill NEBS requirements, establish a 4-inch space above and below the chassis. For more information on thermal characteristics, see [“Power Requirements”](#) on page 76.

Step	Procedure	Installer Check ✓
1	Install a mounting bracket on each side of the HMS-358 chassis using the four (6-32 x $\frac{3}{16}$) screws provided for each bracket. Mounting brackets and screws are contained in the installation kit. Apply the amount of torque specified by local codes.	<input type="checkbox"/>
2	Align the chassis mounting bracket holes with the rack's vertical mounting holes. The rack's mounting holes should be spaced $\frac{1}{2}$ inch or $1-\frac{1}{4}$ inches apart to properly align with the mounting bracket holes.	<input type="checkbox"/>
3	Mount the chassis in the rack. Install four each 12-24 x $\frac{1}{2}$ screws in each bracket and secure the chassis to the rack. Apply the amount of torque specified by local codes.	<input type="checkbox"/>

Installer Signature 
Date

CABLING THE CHASSIS

The HMS-358 allows for several network interface configurations:

- DS3 (see “Installing Interface Cables—DS3 or STS-1 to DSL” on page 12)
- STS-1 (see “Installing Interface Cables—DS3 or STS-1 to DSL” on page 12)
- DSX-1 (see “Installing Interface Cables—DSX-1 to DSL (Port 2)” on page 14)

Depending on which of these shelf configurations you ordered, locate the proper cable installation procedures as detailed in “Selecting the Proper Installation Procedures” on page 33.

DRAIN WIRE AND CABLE TIE INSTALLATION

To satisfy Network Equipment-Building System (NEBS) requirements, it is necessary to connect a drain wire from a female amphenol cable connector to a male amphenol backplane connector. Cable ties are included in each kit to secure the cables to the backplane. The following procedure should be repeated for each amphenol connector.



The grounding of shielded cables should always conform to local codes. To avoid ground loops, confirm that all shielded cables are grounded at only one end.

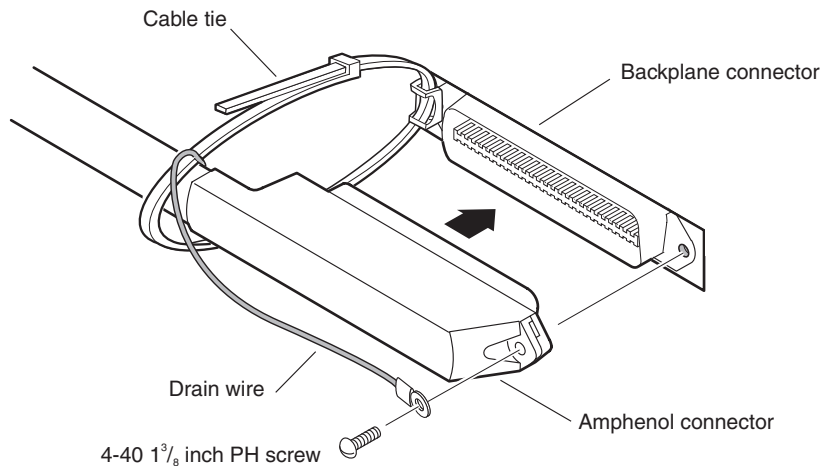


Figure 4. Installing the Drain Wire and Cable Tie for all Amphenol Connectors

Step	Procedure
1	Place the 4-40 x 1 3/8-inch screw through the drain wire, the screw hole on the female amphenol cable connector, and the screw hole on the male amphenol backplane connector. (See Figure 4.) Tighten the screw until the connector is securely attached.
2	Lace a cable tie through the tie base on the male backplane connector, thread the tip of the tie through the eye of the tie, and then pull the tip until the cable tie is completely snug.

CABLE CONNECTOR PINOUTS

Figure 5 shows a standard 16/16 or 25/7 connector cable (available in 50-foot or 200-foot lengths). See Table 3 and Table 4 on page 10) for pinout descriptions of these two cable connectors.

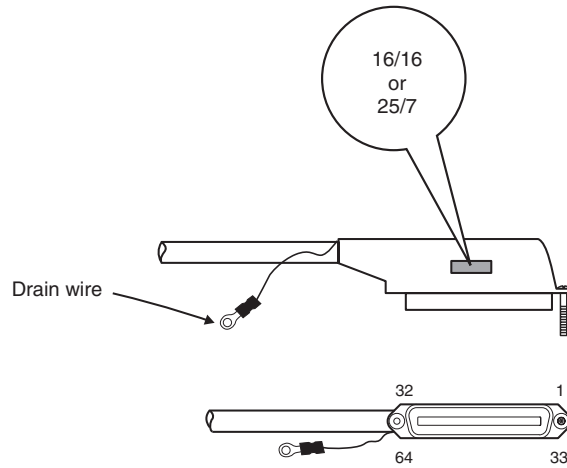


Figure 5. 50-foot (16/16 or 25/7) or 200-foot (16/16 or 25/7) Cable Connectors

Table 3. Cable Connector Pinout and Color Code (16/16 Cable)

Ring Pins				Tip Pins		
	Color Code	Connector Pin Number	Slot	Connector Pin Number	Slot	Color Code
BINDER #1 (BLUE)	Blue/White	1	1	33	1	White/Blue
	Orange/White	2	2	34	2	White/Orange
	Green/White	3	3	35	3	White/Green
	Brown/White	4	4	36	4	White/Brown
	Slate/White	5	5	37	5	White/Slate
	Blue/Red	6	6	38	6	Red/Blue
	Orange/Red	7	7	39	7	Red/Orange
	Green/Red	8	8	40	8	Red/Green
	Brown/Red	9	9	41	9	Red/Brown
	Slate/Red	10	10	42	10	Red/Slate
	Blue/Black	11	11	43	11	Black/Blue
	Orange/Black	12	12	44	12	Black/Orange
	Green/Black	13	13	45	13	Black/Green
	Brown/Black	14	14	46	14	Black/Brown
	Slate/Black	15	15	47	15	Black/Slate
	Blue/Black	16	16	48	16	Black/Slate
BINDER #2 (ORANGE)	Blue/White	17	17	49	17	White/Blue
	Orange/White	18	18	50	18	White/Orange
	Green/White	19	19	51	19	White/Green
	Brown/White	20	20	52	20	White/Brown
	Slate/White	21	21	53	21	White/Slate
	Blue/Red	22	22	54	22	Red/Blue
	Orange/Red	23	23	55	23	Red/Orange
	Green/Red	24	24	56	24	Red/Green
	Brown/Red	25	25	57	25	Red/Brown
	Slate/Red	26	26	58	26	Red/Slate
	Blue/Black	27	27	59	27	Black/Blue
	Orange/Black	28	28	60	28	Black/Orange
	Green/Black	29	29	61	29	Black/Green
	Brown/Black	30	30	62	30	Black/Brown
	Slate/Black	31	31	63	31	Black/Slate
	Blue/Black	32	32	64	32	Black/Slate

Table 4. Cable Connector Pinout and Color Code (25/7 Cable)

Ring Pins				Tip Pins		
	Color Code	Connector Pin Number	Slot	Connector Pin Number	Slot	Color Code
BINDER #1 (BLUE)	Blue/White	1	1	33	1	White/Blue
	Orange/White	2	2	34	2	White/Orange
	Green/White	3	3	35	3	White/Green
	Brown/White	4	4	36	4	White/Brown
	Slate/White	5	5	37	5	White/Slate
	Blue/Red	6	6	38	6	Red/Blue
	Orange/Red	7	7	39	7	Red/Orange
	Green/Red	8	8	40	8	Red/Green
	Brown/Red	9	9	41	9	Red/Brown
	Slate/Red	10	10	42	10	Red/Slate
	Blue/Black	11	11	43	11	Black/Blue
	Orange/Black	12	12	44	12	Black/Orange
	Green/Black	13	13	45	13	Black/Green
	Brown/Black	14	14	46	14	Black/Brown
	Slate/Black	15	15	47	15	Black/Slate
	Blue/Black	16	16	48	16	Black/Slate
	Blue/Black	17	17	49	17	Black/Slate
	Blue/Black	18	18	50	18	Black/Slate
	Blue/Black	19	19	51	19	Black/Slate
	Blue/Black	20	20	52	20	Black/Slate
	Blue/Black	21	21	53	21	Black/Slate
	Blue/Black	22	22	54	22	Black/Slate
	Blue/Black	23	23	55	23	Black/Slate
	Blue/Black	24	24	56	24	Black/Slate
	Blue/Black	25	25	57	25	Black/Slate
BINDER #2 (ORANGE)	Blue/White	26	26	58	26	White/Blue
	Orange/White	27	27	59	27	White/Orange
	Green/White	28	28	60	28	White/Green
	Brown/White	29	29	61	29	White/Brown
	Slate/White	30	30	62	30	White/Slate
	Blue/Red	31	31	63	31	Red/Blue
	Orange/Red	32	32	64	32	Red/Orange

SELECTING THE PROPER INSTALLATION PROCEDURES

This guide identifies the cable installation procedures for each shelf configuration with a tabbed section title (Figure 6).

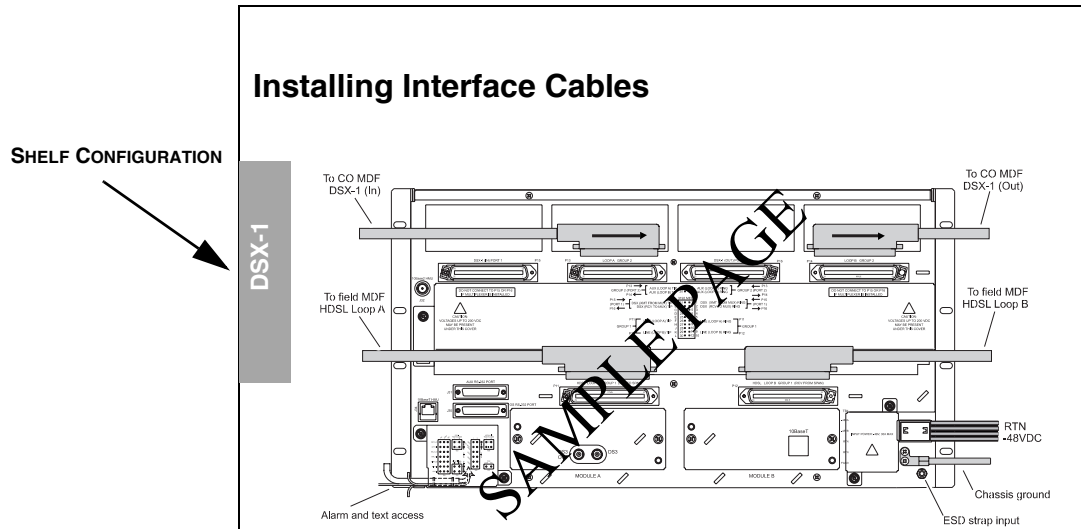


Figure 6. *Selecting the Proper Tabbed Section for Your Shelf Configuration*

Select the tabbed section that applies to your configuration and only follow those procedures:

- DS3 or STS-1 to DSL configuration (see “Installing Interface Cables—DS3 or STS-1 to DSL” on page 12)
- DSX-1 to DSL (Port 1), no multiplexer configuration (see “Installing Interface Cables—DSX-1 to DSL (Port 1)” on page 13)
- DSX-1 to DSL (Port 2), multiplexed network configuration (see “Installing Interface Cables—DSX-1 to DSL (Port 2)” on page 14)

INSTALLING INTERFACE CABLES—DS3 OR STS-1 TO DSL

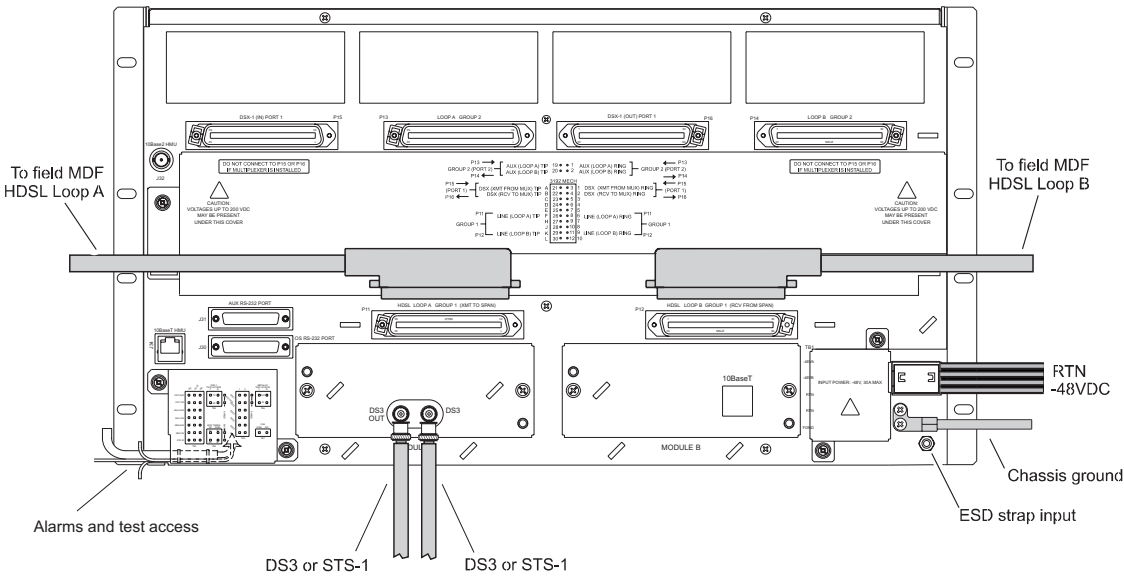



Figure 7. Installing Cables for a DS3 or STS-1 Configured Shelf (Backplane View)

Step	Procedure	Installer Check ✓
<div style="display: flex; align-items: center;">  <p data-bbox="397 1081 1356 1123">Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p> </div>		
1	Connect the 32-pair shielded amphenol female connector to P11 , HDSL LOOP A and route to the field MDF. See “Drain Wire and Cable Tie Installation” on page 8 for proper installation of all amphenol connectors.	<input type="checkbox"/>
2	Connect the 32-pair shielded amphenol female connector to P12 , HDSL LOOP B and route to the field MDF.	<input type="checkbox"/>
3	Connect a DS3 coaxial cable to Module A DS3 IN connector.	<input type="checkbox"/>
4	Connect a DS3 coaxial cable to Module A DS3 OUT connector.	<input type="checkbox"/>
5	Proceed to “Wiring the Common Access Panel” on page 15.	<input type="checkbox"/>

Installer Signature

Date

INSTALLING INTERFACE CABLES—DSX-1 TO DSL (PORT 1)

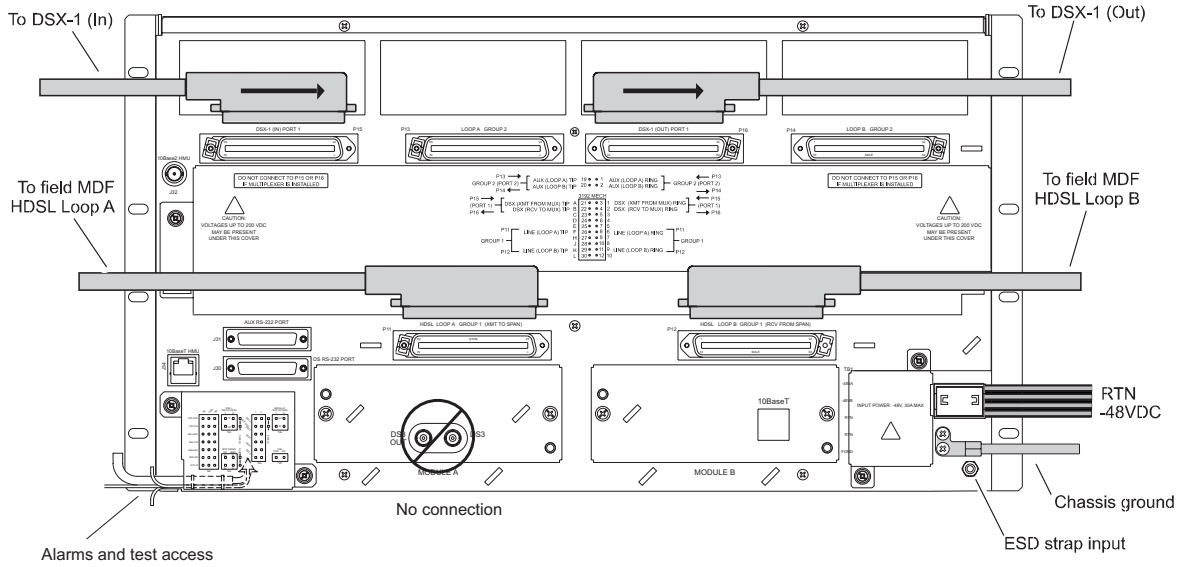



Figure 8. Installing Cables for a DSX-1 Configured Shelf (Backplane View)

Standard 3192 Port 1 Connection: This configuration uses the Port 1 DSX-1 connection from any 3192-compliant line card. Do not use a multiplexer in this configuration. If a multiplexer is required, refer to “Installing Interface Cables—DSX-1 to DSL (Port 2)” on page 14.

Step	Procedure	Installer Check ✓
	 <p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>	
1	<p>Connect the 32-pair shielded amphenol female connector to P11, HDSL LOOP A and route to the field MDF.</p> <p>See “Drain Wire and Cable Tie Installation” on page 8 for proper installation of all amphenol connectors.</p>	<input type="checkbox"/>
2	<p>Connect the 32-pair shielded amphenol female connector to P12, HDSL LOOP B and route to the field MDF.</p>	<input type="checkbox"/>
3	<p>Connect the 32-pair shielded amphenol female connector to P15, DSX-1 (IN) LINE CARD and route to the DSX-1.</p>	<input type="checkbox"/>
4	<p>Connect the 32-pair shielded amphenol female connector to P16, DSX-1 (OUT) LINE CARD and route to the DSX-1.</p>	<input type="checkbox"/>
5	<p>Proceed to “Wiring the Common Access Panel” on page 15.</p>	<input type="checkbox"/>

Installer Signature _____ Date _____

INSTALLING INTERFACE CABLES—DSX-1 TO DSL (PORT 2)

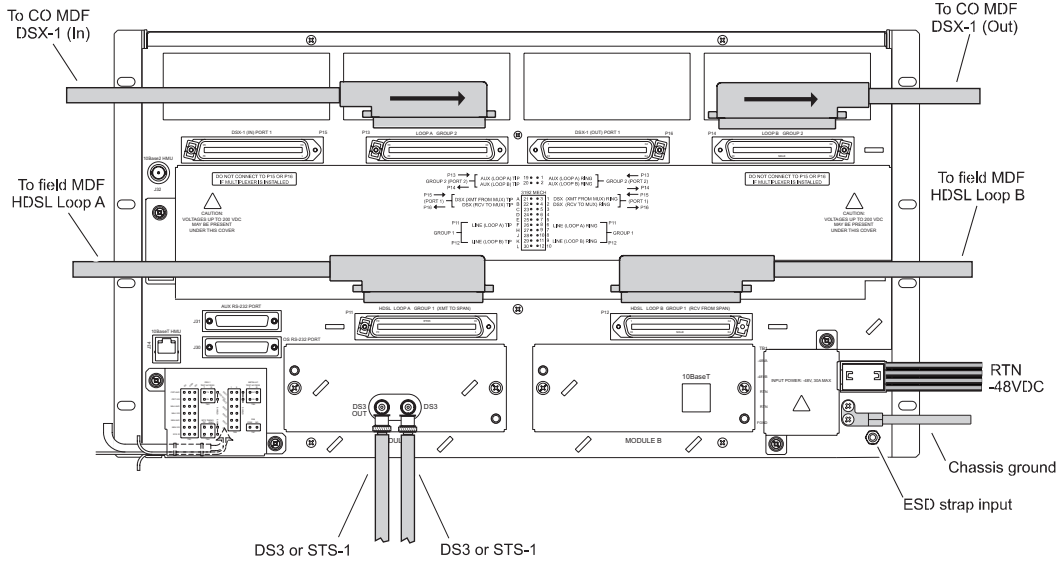



Figure 9. Installing Cables for a DSX-1 Configured Shelf (Backplane View)

Port 2 Connection with Optional Multiplexer: This configuration requires the installation of an H2TU-C List 2E line card to access P13 (IN) and P14 (OUT) Port 2 DSX-1 functions. A multiplexer can be installed in this configuration. (The Transmit and Receive DSX-1s for H2TU-C List 2E line cards are set to Port 1 by default. To configure for Port 2, refer to the H2TU-C List 2E user manual.)

Port 2 can also be accessed by wirewrapping the connections. See “Appendix C - Optional Wire-Wrapping Port Connections” on page 84 for instructions.

Step	Procedure	Installer Check ✓
 <p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>		
1	Connect the 32-pair shielded amphenol female connector to P11 , HDSL LOOP A and route to the field MDF. See “ Drain Wire and Cable Tie Installation ” on page 8 for proper installation of all amphenol connectors.	<input type="checkbox"/>
2	Connect the 32-pair shielded amphenol female connector to P12 , HDSL LOOP B and route to the field MDF.	<input type="checkbox"/>
3	Connect the 32-pair shielded amphenol female connector to P13 , DSX-1 (IN) LINE CARD and route to the DSX-1.	<input type="checkbox"/>
4	Connect the 32-pair shielded amphenol female connector to P14 , DSX-1 (OUT) LINE CARD and route to the DSX-1.	<input type="checkbox"/>
5	Proceed to “ Wiring the Common Access Panel ” on page 15.	<input type="checkbox"/>

Installer Signature 

Date

WIRING THE COMMON ACCESS PANEL

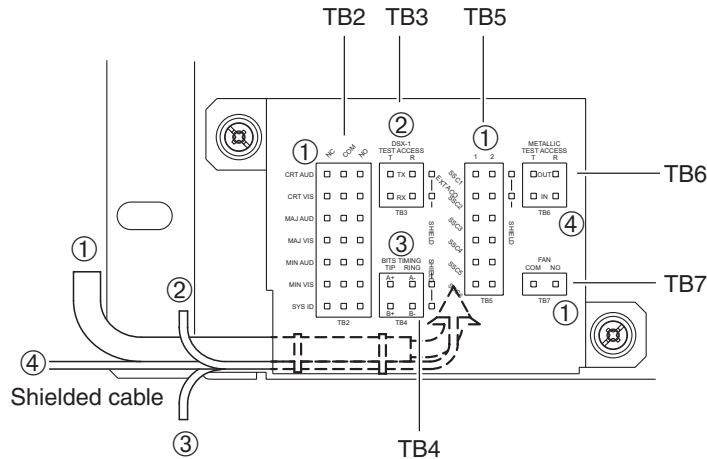



Figure 10. Common Access Panel

Step	Procedure	Installer Check ✓
	 <p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>	
1	Loosen the hold-down lugs on the Common Access Panel (see Figure 10) and lift off the cover. (For enlarged view of wire-wrap posts, see Figure 41 on page 74.)	<input type="checkbox"/>
2	Connect shielded alarm relay wires from the CO alarm center to the wire wrap posts at Alarm Management (TB2) . Follow the CO site instructions for connecting alarm relays.	<input type="checkbox"/>
3	Connect shielded transmit (TX) tip and ring and receive (RX) tip and ring at the DSX-1 Test Access (TB3) block and the corresponding chassis shield posts to the external test head.	<input type="checkbox"/>
4	If you are installing an HXU-359 multiplexer in the HMS-358, connect the shielded Bits Timing (TB4) block Bits A, Bits B, and the corresponding chassis shield posts to the SONET clock synchronization source.	<input type="checkbox"/>
5	If you have a requirement for an external alarm, such as an open door alarm, use the User Configurable Alarm Inputs (TB5) block to wire the SSC1 EXT ACO (Special Signaling Channel 1 External Alarm Cutoff), the SSC2 (Special Signaling Channel 2), and the chassis shield to the third-party alarm.	<input type="checkbox"/>
6	Wire COM pin and the NO pin of the Fan (TB7) block in series with an external rack fan. There is a dry contact closure between pins 1 and 2 when the internal air temperature of the HMS-358 reaches 80°F.	<input type="checkbox"/>
7	Replace the cover and tighten the screws.	<input type="checkbox"/>
8	Proceed to “Installing the Power Cables” on page 17.	<input type="checkbox"/>

Installer Signature 

Date

Page Intentionally Left Blank

INSTALLING THE POWER CABLES

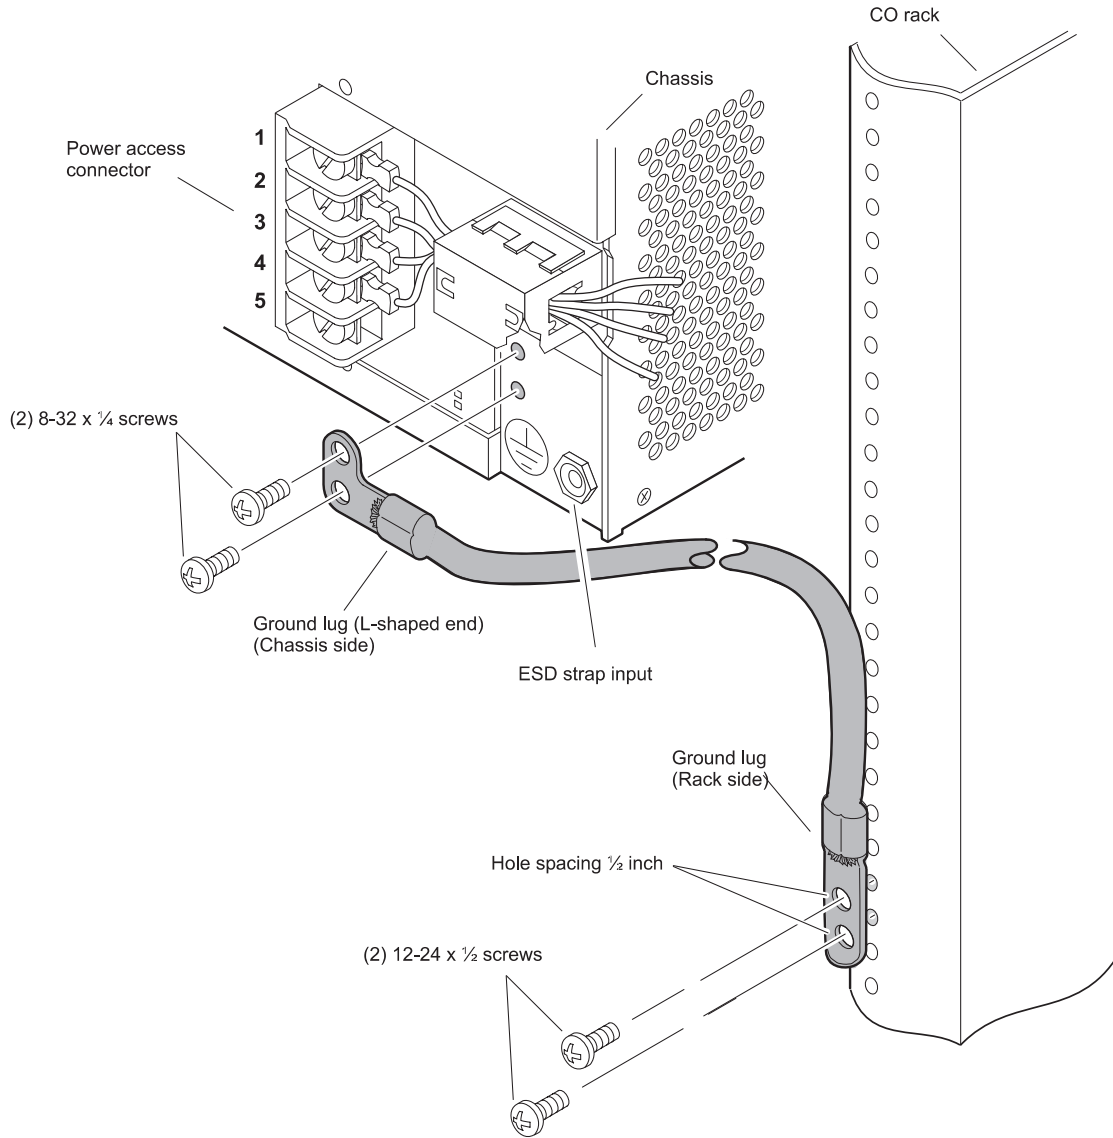




Figure 11. Grounding the Chassis (Right-Hand Side, Rear View)

Step	Procedure	Installer Check ✓
	<p> Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>	
1	Verify that fuses are removed from fuse panel.	<input type="checkbox"/>
2	Remove the panel on the lower right-hand corner of the backplane by removing the two screws that secure it (use a No. 1 Phillips).	<input type="checkbox"/>

Step	Procedure (Continued)	Installer Check ✓
<i>Continued</i>		
	 <p>For legacy (painted) racks, remove the paint from the contact area to ensure good frame ground.</p>	
3	Attach the L-shaped end of the ground lug (see Figure 11 on page 17) using two 8-32 x 3/16 screws to the rear of the chassis.	<input type="checkbox"/>
4	Attach the other end of the ground lug (see Figure 11 on page 17) using two 12-24 x 1/2 screws to the CO rack using locally approved methods (6 AWG or larger cables require double screw connectors).	<input type="checkbox"/>
5	Reduce EMI by prying open the ferrite clamp (see Figure 12) with a slot screwdriver and routing the battery feed wires through the clamp before connecting them to the Power Access.	<input type="checkbox"/>

Continued

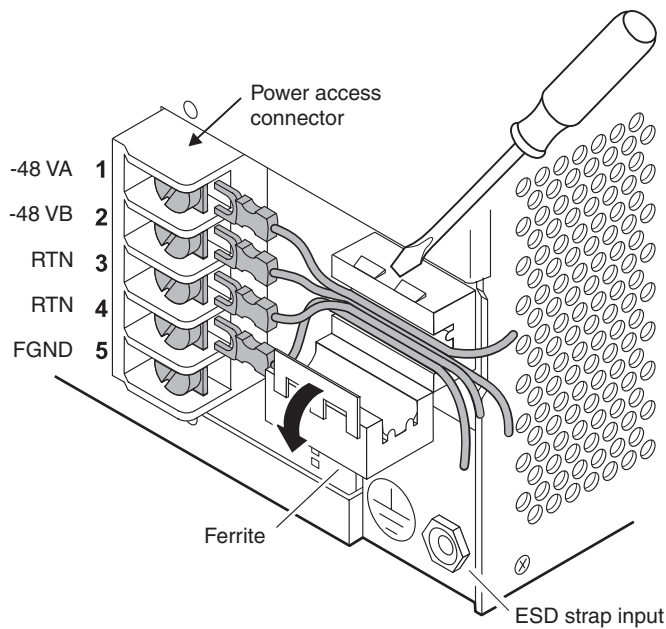



Figure 12. *Opening the Ferrite and Routing the Battery Feed Wires (Right-Hand Side, Rear View)*



-48 VA Return and -48 VB Return are tied together on the backplane and are referenced as RTN on the Power Access connector.

Step	Procedure (Continued)	Installer Check ✓
		
	All connections to terminal block TB1 Power Access connector must be done to local codes.	
6	Attach a ring connector (or locally approved connector) to terminate the 12 AWG ground wire at frame ground (FGND) on the Power Access connector (if needed).	<input type="checkbox"/>
7	Connect a 12 AWG gauge wire to the -48 V RTN terminal in position 3 (see Figure 12 on page 18) of the Power Access connector. Connect the opposite end of this wire to the battery return of the CO battery supply at the fuse panel. If a connector is required, conform to local code.	<input type="checkbox"/>
8	Connect a 12 AWG gauge wire to the -48 V RTN terminal in position 4 (see Figure 12 on page 18) of the Power Access connector. Connect the opposite end of this wire to the battery return of the CO battery supply at the fuse panel. If a connector is required, conform to local code.	<input type="checkbox"/>
9	Connect a 12 AWG gauge wire to the -48 VA terminal in position 1 (see Figure 12 on page 18) of the Power Access connector (for slots 1-14). Connect the opposite end of this wire to the -48 Vdc CO battery supply at the fuse panel. (Fuse is removed.) If a connector is required, conform to local code.	<input type="checkbox"/>
10	Connect a 12 AWG gauge wire to the -48 VB terminal in position 2 (see Figure 12 on page 18) on the Power Access connector (for slots 15-28). Connect the opposite end of this wire to the -48 Vdc CO battery supply at the fuse panel. (Fuse is removed.)	<input type="checkbox"/>
11	Install a fuse of appropriate value in the fuse panel tray, based on the power recommendations given in “ Power Specifications ” on page 75 and Table 14 and Table 15 on page 78 .	<input type="checkbox"/>
12	Close the ferrite clamp.	<input type="checkbox"/>
13	Connect the fuse panel to the office power supply according to CO guidelines.	<input type="checkbox"/>
14	With a voltmeter, verify voltages on the Power Access connector (see Figure 12 on page 18). There should be -48 Vdc across pins 1, -48 VA and RTNs 3 and 4 and pin 2, -48 VB and RTNs 3 and 4. Returns are tied together.	<input type="checkbox"/>
15	Replace the slide panel that covers the Power Access connector by placing the cover over the screws and aligning the panel holes with the screws. Slide the panel $\frac{1}{4}$ -inch to the right until it snaps into place, then tighten the screws.	<input type="checkbox"/>
16	Proceed to “ Connecting the Network Interface ” on page 20 .	<input type="checkbox"/>

Installer Signature 

Date

CONNECTING THE NETWORK INTERFACE

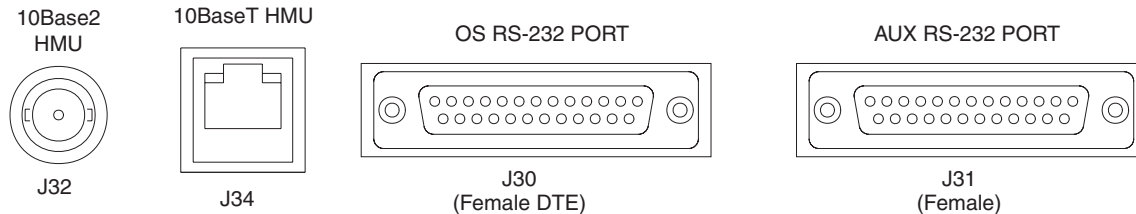


Figure 13. Network Interface Connections



For all network connections, shielded cables are required.
 For 10BASE-T connections, Category-5 shielded cables are required.

Step	Procedure	Installer Check ✓
	<p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>	
1	Determine the network interface for your application 10BASE-2 (coaxial - J32) 10BASE-T (shielded Category 5 - J34) OS DB-25 (RS232, X.25 - J30) Female DTE AUX DB-25 (RS232 - J31) Female	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
2	Connect the appropriate network interface cable (10BASE-2, 10BASE-T, or DB-25) from the network to the appropriate network interface connector located on the rear of the shelf (see Figure 13). For connector pinouts, see Table 5 below through Table 8 on page 22.	<input type="checkbox"/>
3	If your network uses a 10BASE-T interface, proceed to “ Setting Up a Multishelf 10BASE-T Configuration ” on page 23. If your network uses a 10BASE-2 interface, proceed to “ Setting up a 10BASE-2 Configuration ” on page 24.	<input type="checkbox"/>

Installer Signature	Date
---------------------	------

Table 5. J32 Pinouts for 10BASE-2 Interface

Pin	Description
Center	LAN
Shield	LAN

Cable must be coaxial.

Table 6. J34 Pinouts for 10BASE-T Interface

Pin	Description
1	TD
2	TD
3	RD
4	NC
5	NC
6	RD
7	NC
8	NC

NC = no connection.
Cable must be shielded category 5.

The OS interface (Table 7) supports RS232 craft interface or an X.25 remote interface.

Table 7. J30 Pinouts for DB-25 (Female Connector) OS Interface (DTE)

Pin	Description	Pin	Description
1	NC	14	NC
2	NMA TX	15	NMA TCLK
3	NMA RX	16	NC
4	NMA RTS	17	NMA RCLK
5	NMA CTS	18	NC
6	NMA DSR	19	NC
7	NMA RTN	20	NMA DTR
8	NC	21	NC
9	NC	22	NC
10	NC	23	NC
11	NC	24	OS TCLK
12	NC	25	NC
13	NC		

NC = no connection.
Cable must be shielded.

Table 8. J31 Pinouts for DB-25 (Female Connector) AUX Interface (DTE)

Pin	Description	Pin	Description
1	NC	14	NC
2	AUX TX	15	NC
3	AUX2 RX	16	NC
4	AUX2 RTS	17	NC
5	AUX2 CTS	18	NC
6	AUX2 DSR	19	NC
7	AUX2 RTN	20	AUX2 DTR
8	NC	21	NC
9	NC	22	NC
10	NC	23	NC
11	NC	24	NC
12	NC	25	NC
13	NC		

NC = no connection.
Cable must be shielded.



The RS-232 DB-25 AUX interface cannot be used when a multiplexer is present in the shelf.

SETTING UP A MULTISHELF 10BASE-T CONFIGURATION

The Wideband 3190 can be connected by an external hub to other shelves in a 10BASE-T network.

Figure 14 shows a multishelf 10BASE-T configuration. Use shielded twisted-pair cables (Category-5) to connect each shelf to the hub.

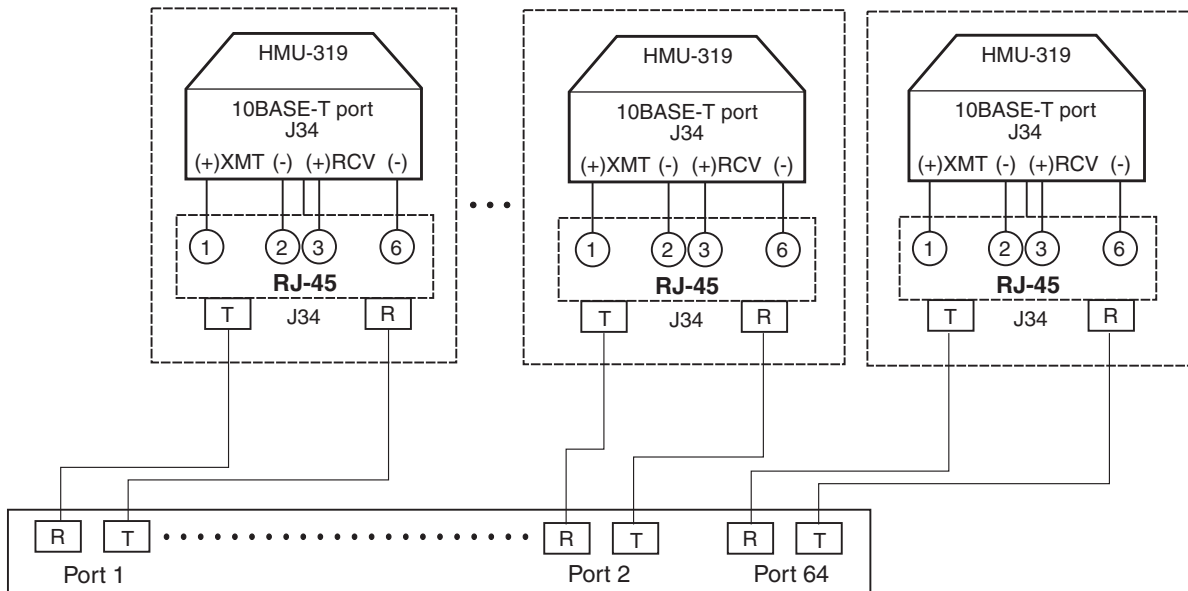


Figure 14. Multishelf 10BASE-T Configuration

Step	Procedure	Installer Check ✓
1	Connect each CO shelf to an external hub using shielded twisted-pair cable (Category-5). The maximum length of each twisted pair is 328 ft. (100 m)	<input type="checkbox"/>
2	Proceed to “Installing a Management Unit (HMU)” on page 26.	<input type="checkbox"/>

Installer Signature _____ Date _____

SETTING UP A 10BASE-2 CONFIGURATION

The HMS-358 can be connected by an external hub to other shelves in a 10BASE-2 network.

MULTISHELF 10BASE-2 CONFIGURATION

An HMS-358 multishelf 10BASE-2 configuration can be managed locally or by a remote terminal over an X.25 network as shown in Figure 15. For the purposes of installation, this manual only describes local management. For more information on setting up an X.25 connection, refer to the HMU-319 List 5A, List 7A, and List 7C user manuals.

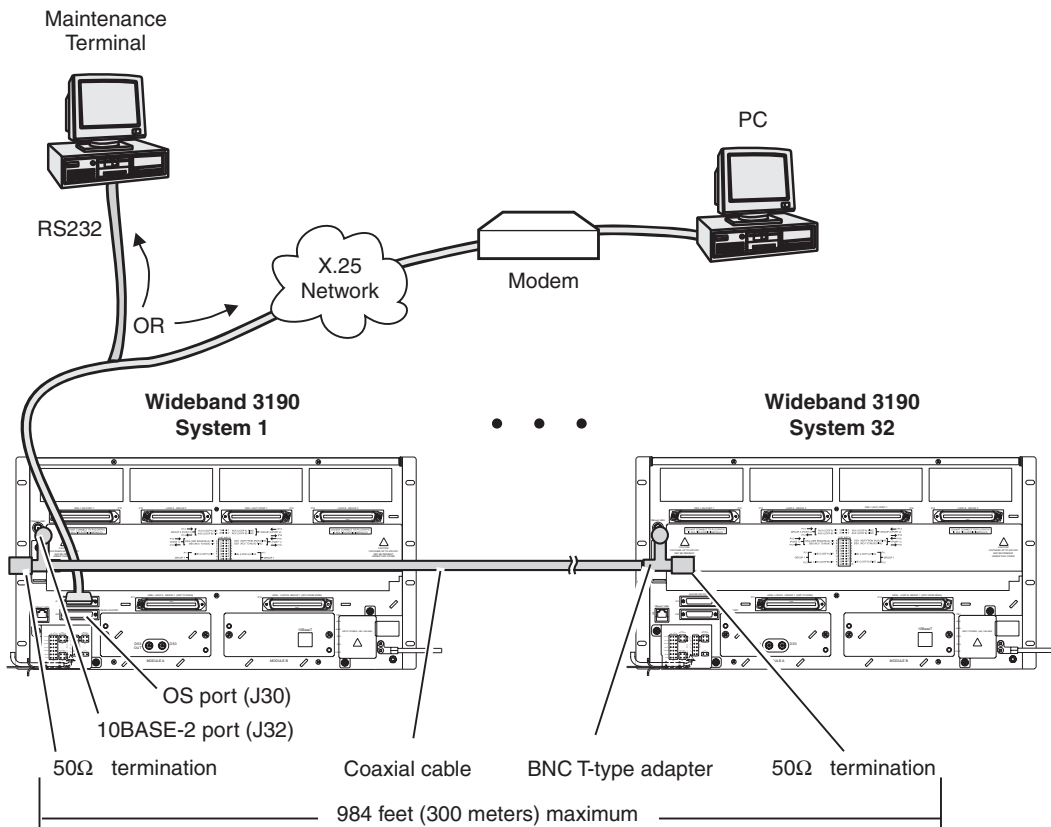


Figure 15. Multishelf 10BASE-2 Configuration



- The bayonet-locking connector (BNC) T-adapter must directly connect to the 10BASE-2 connector.
- Do not use coax cable between the BNC T-adapter and J32.
- The first and last shelf in a multishelf system require a 50Ω termination.

Step	Procedure	Installer Check ✓
1	Connect a standard BNC T-adapter to the 10BASE-2 port (J32) on the backplane of each shelf in the series as shown in Figure 15 on page 26.	<input type="checkbox"/>
2	Connect one end of a coaxial cable to the BNC adapter on the back of the first shelf.	<input type="checkbox"/>
3	Connect the other end of the cable to the BNC adapter on the back of the second shelf in the series.	<input type="checkbox"/>
4	Connect each shelf to the next shelf in a series as described in Step 1 through Step 3 .	<input type="checkbox"/>
5	Install a standard 50Ω termination on the unused side of the BNC adapter on the first and the last shelves in the series.	<input type="checkbox"/>
6	Proceed to “ Installing a Management Unit (HMU) ” on page 26.	<input type="checkbox"/>

Installer Signature 	Date
---	------

MANAGEMENT OVER AN X.25 NETWORK

The HMS-358 can be managed from a remote terminal over an X.25 network. For more information about X.25 networks, refer to the HMU-319 List 5A, List 7A, and List 7C user manuals. Once you have installed and configured the HMU as described in the section “[Installing a Management Unit \(HMU\)](#)” on page 26, you can set up an X.25 interface as described below:

Step	Procedure	Installer Check ✓
1	Connect the remote maintenance terminal to the remote modem. Refer to the HMU user manual for details of connection and configuration.	<input type="checkbox"/>
2	Connect the remote modem to the OS port (J30).	<input type="checkbox"/>
3	Access the HMU and use TL1 commands to configure the OS port for X.25 as described in “ Appendix B - HMU Configuration for X.25 and Ethernet Connections ” on page 80.	<input type="checkbox"/>
4	Once the OS port is set up for X.25, you can use the HMU X.25 Management screen to customize the X.25 interface.	<input type="checkbox"/>

Installer Signature 	Date
---	------

INSTALLING A MANAGEMENT UNIT (HMU)

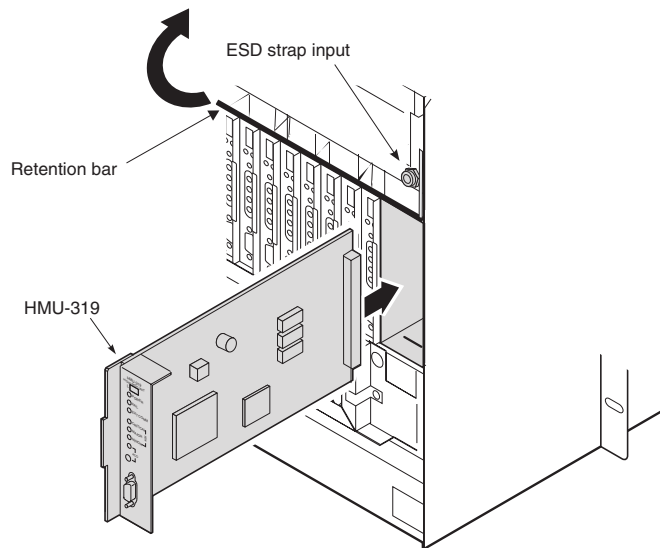



Figure 16. Installing an HMU

Step	Procedure	Installer Check ✓
	 <p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>	
1	Unscrew the two hold-down lugs on each upper corner of the chassis front cover. The cover folds down.	<input type="checkbox"/>
2	Lift the retention bar at the top of the chassis to allow insertion of the module.	<input type="checkbox"/>
3	Hold the HMU-319 vertically with the front of the card toward you. Align the top and bottom edges of the HMU-319 with the guide rails in the HMU slot and slide the HMU-319 into the rightmost slot position on the chassis (labeled HMU). See Figure 16.	<input type="checkbox"/>
4	Press the HMU-319 firmly into the connector at the back of the slot. When the pins on the HMU-319 connect to the pins on the shelf backplane, the HMU-319 powers up, the Power LED lights green, and the Fail LED and Critical LED briefly flash red.	<input type="checkbox"/>
5	Proceed to “Configuring the Management Unit” on page 30.	<input type="checkbox"/>

Installer Signature  _____ Date _____

CONNECTING A LOCAL MAINTENANCE TERMINAL

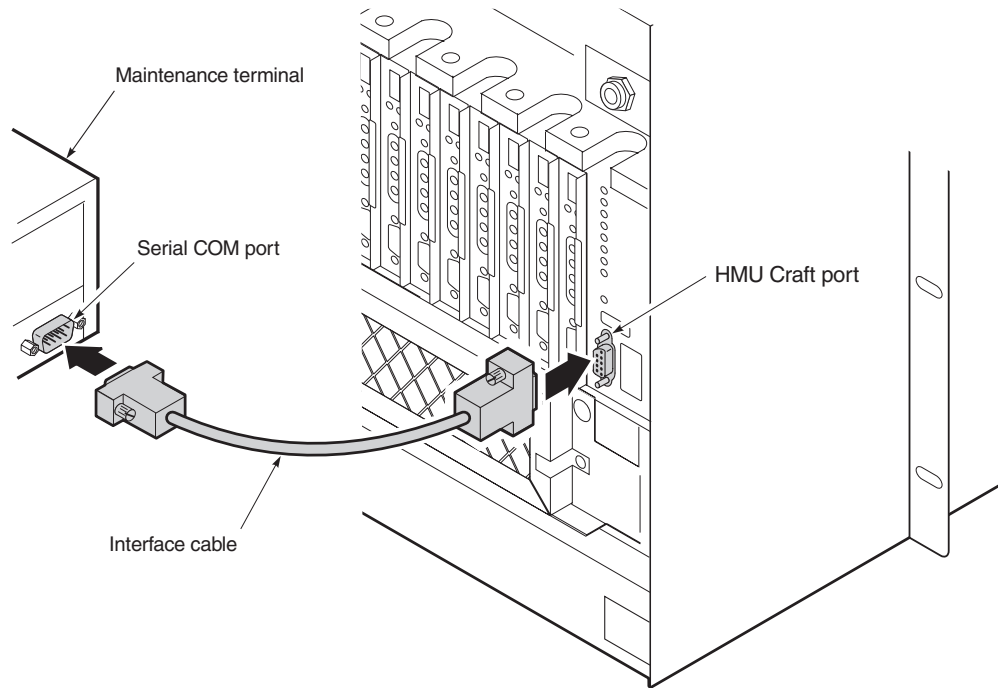



Figure 17. Connecting a Maintenance Terminal to the HMU Craft Port

Step	Procedure	Installer Check ✓
	 <p>The HMU DCE should be connected to the DTE port of the local maintenance terminal. If the connection to the HMU requires a DTE-to-DTE or DCE-to-DCE interface, see the HMU user manual for information about null modem adapters. The HMU user manual also provides information about remote terminal connections and X.25.</p>	
1	Connect a standard 9-pin, terminal cable to the HMU front panel craft (DB-9) port or connect a 25-pin terminal cable to the OS port (J30) on any of the shelves in the network. If you are connecting the maintenance terminal to the OS port (local RS232 or remote X.25), a null modem adapter is required. The craft port is configured as DCE. The OS port is configured as DTE.	<input type="checkbox"/>
2	Connect the other end of the terminal cable to the serial COM port on the maintenance terminal.	<input type="checkbox"/>
3	Start a VT100 terminal emulation program, such as HyperTerminal or Procomm, on the PC.	<input type="checkbox"/>
4	Configure the maintenance terminal as follows: <ul style="list-style-type: none"> • 9600 baud • No parity • 8 data bits • 1 stop bit 	<input type="checkbox"/>
5	Proceed to “Using the Terminal Access Option” on page 28.	<input type="checkbox"/>

Installer Signature 

Date

USING THE TERMINAL ACCESS OPTION

You can use the Terminal Access Option (TAO) interface to access and manage all the components of the HMS-358, including the line units, multiplexers, shelf, and the associated doublers and remote units.

Depending on the version of HMU software you are using, the logon procedure varies. At the time of this writing, all versions of software respond to at least one of the logon procedures described below. Select the logon procedure that applies and follow the instructions.

Procedure 1	<ol style="list-style-type: none"> 1 At the prompt, type <code>tao</code>, then press ENTER. 2 At the “enter password” prompt, type <code>public</code> (default password) and press ENTER.
Procedure 2	<ol style="list-style-type: none"> 1 At the prompt, type <code>tao</code>, then press ENTER. 2 After the message, “Please Log off TL1 session and retype TAO,” type <code>logoff</code>, and then type a semicolon (;). 3 After the “Logged out OK” message, type <code>tao</code>, then press ENTER. 4 At the password prompt, type <code>public</code> (default password) and press ENTER.
Procedure 3	<ol style="list-style-type: none"> 1 At the prompt, type <code>tao</code>, then press ENTER. 2 After the message, “Please log on to local TL1 with proper privilege and re-type TAO,” press ENTER. 3 At the “Enter TID [local]” prompt, enter the ID (if necessary) or press ENTER. 4 At the “Enter username” prompt, type <code>superuser</code> (default username), then press ENTER. 5 At the “Enter password” prompt, type <code>public#1</code> (default password) and press ENTER. 6 At the TL1 prompt (<), type <code>tao</code> and press ENTER.

- Upon successful logon to a **single-shelf system**, the Shelf Status screen appears (Figure 19 on page 29).
- Upon successful logon to a **multishelf system**, the Network Status Screen appears (Figure 18 on page 29). Select the shelf you wish to view. The Shelf Status screen appears.



If you forget your password, contact ADC Technical Assistance Center (see “Appendix E - Product Support” on page 88). For more information about passwords, refer to the HMU user manual.

Installer Signature 

Date



Contact the Technical Assistance Center (TAC) for information on using the Transaction Language 1 (TL1) command line interface for the following command sets:

- HXU-358 List 1 (M13) TL1 Command Set
- HXU-359 List 1 (STS-1) TL1 Command Set

Proceed to “Configuring the Management Unit” on page 30.


```

Terminal Access Option (TAO)

Network Status(Shelf # / Status / ID) Host ID: NEWCARD
-----
1-Shelf name (1)                17-
2-Shelf name (2)                18-
3-Shelf name (3)                19-
4-                               20-
5-                               21-
6-                               22-
7-                               23-
8-                               24-
9-                               25-
10-                              26-
11-                              27-
12-                              28-
13-                              29-
14-                              30-
15-                              31-
16-                              32-
-----10/01/01 15:33:27---

X - Exit TAO <CR> - Refresh Screen
Enter shelf number or select option:

```

Figure 18. Multishelf Configuration Sample

```

Terminal Access Option (TAO)

Shelf Status for: NEWCARD (slot# - Alarm Status)
-----
1 [HLU] NORMAL    2                3 [HLU] NORMAL    4 [HLU] NORMAL
5 [ELU] NORMAL    6 [ELU] NORMAL    7 [ELU] NORMAL    8 [UNK] NORMAL
9 [HLU] NORMAL    10 [HLU] NORMAL   11 [UNK] UNKNOWN   12 [HLU] NORMAL
13 [HLU] NORMAL   14 [HLU] NORMAL   15 [HLU] NORMAL   16 [UNK] UNKNOWN
17 [HLU] NORMAL   18                19 [HLU] NORMAL   20 [HLU] NORMAL
21 [HLU] NORMAL   22                23 [HLU] NORMAL   24*[HLU] NORMAL
25 [HLU] NORMAL   26 [HLU] NORMAL   27 [HLU] NORMAL   28 [HLU] NORMAL
* = Slot Alarms Disabled                                Mux [358] NORMAL
-----
LOS Alarm Bus: NORMAL          FUSE Alarm Bus: NORMAL

PROTECTION: NORMAL            PWRFEEDALM: NORMAL
Critical Alarm: OFF           Major Alarm: ON             Minor Alarm: OFF
-----10/01/01 15:34:26---

A - Alarm Management    M - Mux
N - Network Screen    P - HLU Protection Switching
O - Shelf Options    <CR> - Refresh Screen    X - Exit TAO
Enter Line Unit Number or Select Option:

```

Figure 19. Single-Shelf Configuration Sample

CONFIGURING THE MANAGEMENT UNIT



Be sure to have an IP address ready. It is required during HMU configuration. For more information on IP addressing, refer to “Network Communications” on page 72.

Once the HMU has been installed in the shelf, you need to complete the following basic configuration steps:

- Setting the HMU date and time stamp for all alarms and reporting (page 31)
- Setting up a Shelf Identifier (SID) for each shelf for on-screen displays (page 31)
- Setting the Local IP address (page 32)



If you forget your password, contact ADC Technical Assistance Center (see “Appendix E - Product Support” on page 88). For more information about passwords, refer to the HMU user manual.

Step	Procedure	Installer Check ✓
	<p>The following procedure assumes proper TAO login. For proper login procedure, please refer to “Using the Terminal Access Option” on page 28.</p>	
1	From the Network Status screen (for multishelf configurations only), enter the number of the desired shelf (1 through 32), and then press ENTER .	<input type="checkbox"/>
	<p>The user-assigned chassis name must be used for proper shelf identification. A descriptive naming plan must be developed and implemented.</p>	
2	From the Shelf Status screen, press ○ to select Shelf Options.	<input type="checkbox"/>
3	Proceed to “Setting the HMU Date and Time (Option H)” on page 31.	<input type="checkbox"/>

Installer Signature	Date
---------------------	------



TAO times out after a period of inactivity. Enter TAO to return to the TAO screen.

Setting the HMU Date and Time (Option H)



Setting the HMU date and time globally configures these parameters for all HLU-319s in the system. The HMU-319 List 7A also globally updates the time and date settings for the HXUs in the chassis.

Step	Procedure	Installer Check ✓
1	Press H and then press ENTER to select Change HMU Date and Time.	<input type="checkbox"/>
2	At the prompt, enter the current date using MM/DD/YY format, and then press ENTER .	<input type="checkbox"/>
3	At the prompt, enter the current time using HH:MM 24-hour format, and then press ENTER .	<input type="checkbox"/>
4	Press X to exit the screen and return to the Shelf Status menu.	<input type="checkbox"/>
5	Proceed to “Setting the Shelf Identifier (Option D)” on page 31.	<input type="checkbox"/>

Installer Signature	Date
---------------------	------

Setting the Shelf Identifier (Option D)

Step	Procedure	Installer Check ✓
1	From the Shelf Options menu, press D and then press ENTER to select Shelf ID.	<input type="checkbox"/>
2	At the prompt, enter a text string of 32 alphanumeric characters or less to identify the shelf, and then press ENTER . The Shelf Identifier may be set to any value, but must be unique for each shelf in the network.	<input type="checkbox"/>
3	Press X to exit the screen.	<input type="checkbox"/>
4	Press Y to confirm, save the setting, and return to the Shelf Status menu.	<input type="checkbox"/>
5	Proceed to “Setting the Local IP Address (Option A)” on page 32.	<input type="checkbox"/>


Installer Signature	Date
---------------------	------

Setting the Local IP Address (Option A)

Step	Procedure	Installer Check ✓
1	From the Shelf Options menu, press A , then press ENTER to select Local IP Address for the HMU.	<input type="checkbox"/>
2	At the prompt, enter the local IP address using the XXX.XXX.XXX.YYY format, where XXX and YYY are decimal numbers from 0 through 255. Do not select your own address. Your administrator should notify you of the unique address that has been assigned to the network. For additional help on IP addressing, see “Network Communications” on page 72.	<input type="checkbox"/>
3	Press ENTER .	<input type="checkbox"/>
4	Press X to exit the screen.	<input type="checkbox"/>
5	Press Y to confirm, save the setting, and reset the HMU. The program returns to the Network Status menu (if in a multishelf configuration) or Shelf Status menu (if in a single shelf).	<input type="checkbox"/>

Installer Signature 	Date
---	------

Setting the Ethernet Connection (Option G)

Step	Procedure	Installer Check ✓
1	From the Shelf Options menu, press G and then press ENTER to select Change Ethernet Connection.	<input type="checkbox"/>
2	Press 1 and then press ENTER to select 10BASE-T.  For a single system installation that does not require a hubbed network connection, verify that the special 10BASE-T cable that comes with the module is connected from the module to the 10BASE-T (J34) connection on the back of the shelf. If a hub is used, the 10BASE-T module can be routed directly to the hub using a Category-5 shielded connection.	<input type="checkbox"/>
3	Press X to exit the screen.	<input type="checkbox"/>
4	Press Y to confirm, save the setting, and reset the HMU. The program returns to the Network Status menu (if in a multishelf configuration) or Shelf Status menu (if in a single shelf).	<input type="checkbox"/>
5	Proceed to “Installing Multiplexers” on page 33.	<input type="checkbox"/>

Installer Signature 	Date
---	------

INSTALLING MULTIPLEXERS

The HMS-358 can be configured with the following multiplexer cards:

- HXU-358 or HXU-360—DS3 (T1/E1) (see “Installing the HXU-358 or HXU-360 Multiplexer Card” on page 34)
- HXU-359—STS-1 (see “Installing the HXU-359 Multiplexer Card” on page 43)

Depending on which of these multiplexers you are configuring, locate the proper installation procedures as detailed in “Selecting the Proper Installation Procedures” below.



Before installing a multiplexer, verify that there are no cables plugged into P15 and P16 (Port 1) at the rear of the chassis. If there are cables connected to P15 and P16 and they are not in use, remove them. If the cables are in use, take them out of service and then remove them.

Leaving cables attached to P15 and P16 (Port 1) double terminates the DSX-1 interface and causes it to malfunction.

SELECTING THE PROPER INSTALLATION PROCEDURES

This guide divides the installation procedure of each multiplexer into tabbed sections (see Figure 20). Follow the procedures listed only within this tabbed section of the guide.

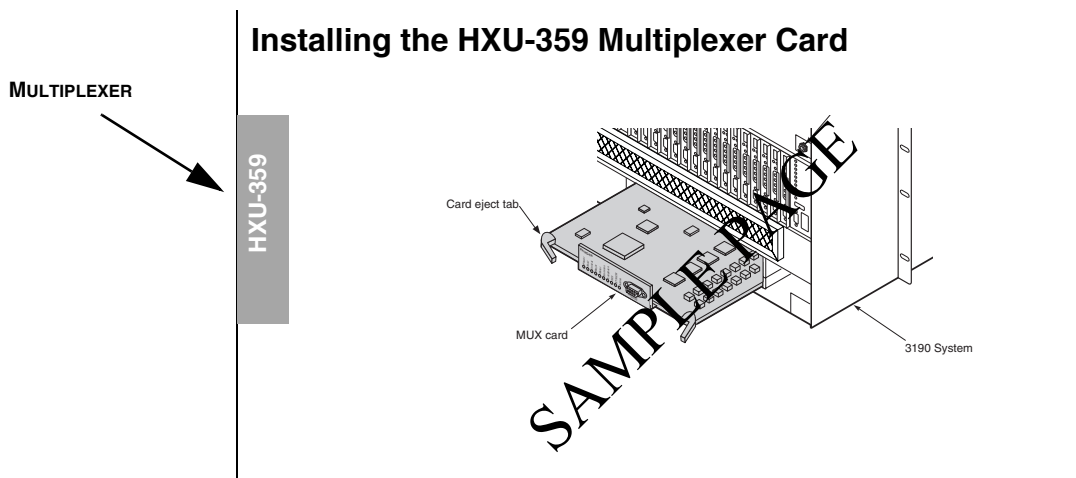


Figure 20. *Selecting the Proper Tabbed Section for Your Multiplexer*

INSTALLING THE HXU-358 OR HXU-360 MULTIPLEXER CARD

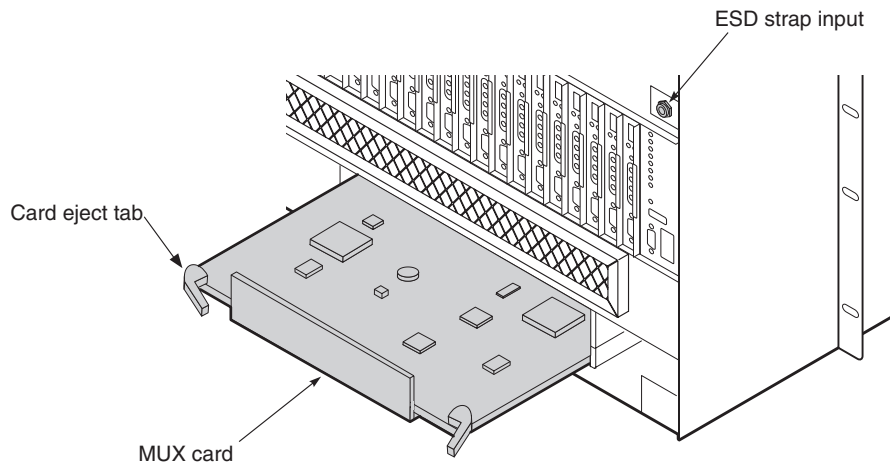



Figure 21. Installing an HXU-358 or HXU-360

Step	Procedure	Installer Check ✓
<div style="display: flex; align-items: center;">  <p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p> </div>		
1	If you have not already done so, unscrew the two hold-down lugs on each side of the chassis front cover. The cover folds down.	<input type="checkbox"/>
2	Plug your ESD strap into the ESD input on the front of the chassis.	<input type="checkbox"/>
3	Align the edges of the HXU-358 or HXU-360 multiplexer card with the slot guides in the multiplexer tray.	<input type="checkbox"/>
4	Grasping the card eject tabs, gently push the card into the bay.	<input type="checkbox"/>
5	Firmly press in on the tabs until the card snaps into place.	<input type="checkbox"/>
6	Repeat Step 3 through Step 5 for the other HXU-358 or HXU-360 multiplexer.	<input type="checkbox"/>
7	Proceed to “ Setting Up Basic System Parameters Through the Config Menu ” on page 35.	<input type="checkbox"/>

Installer Signature 

Date

Setting Up Basic System Parameters Through the Config Menu

```

Main  Monitor  History  Config  Test  Inventory  Quit  Help
+-----+
| T1/E1 Ports |
| DS3 Port    |
| Password    |
| Date and Time |
| Card ID|
| SW Download|
| X-Connect |
| Autologout Time|
| Maintenance Port |
| Circuit IDs|
| Restore Defaults|
+-----+

ID: | Card 'A' | 10/01/01 10:42:47 | ALARMS: NONE

```

Figure 22. Config Menu for the HXU-358







```

Main  Monitor  History  Config  Test  Inventory  Quit  Help
+-----+
| T1/E1 Ports |
| DS3 Port    |
| Password    |
| Date and Time |
| System Options|
| SW Download|
| X-Connect |
| Autologout Time|
| Maintenance Port |
| Circuit IDs|
| BITS Timing|
| In Band LoopCode|
| Restore Defaults|
+-----+

ID: | Card 'A' | 10/01/01 10:42:47 | ALARMS: NONE

```

Figure 23. Config Menu for the HXU-360

Step	Procedure	Installer Check ✓
	 <p>The following procedure assumes proper TAO login. For proper login procedure, please refer to “Using the Terminal Access Option” on page 28.</p>	
	 <p>Use , , ,  to navigate through multiplexer menu options and settings.</p>	
1	From the Network Status screen, type the number of the desired shelf ID (1 through 32), and then press ENTER .	<input type="checkbox"/>
2	From the Shelf Status screen, press O to select Shelf Options.	<input type="checkbox"/>
3	From the Shelf Options screen, press E to configure the Mux Type.	<input type="checkbox"/>
4	Press 2 for HXU-358 or HXU-360.	<input type="checkbox"/>
5	Press X to exit the screen and return to the root menu of the Shelf Status screen.	<input type="checkbox"/>
6	From the Shelf Options screen, select M .	<input type="checkbox"/>
7	Select the Config menu and then press ENTER .	<input type="checkbox"/>
8	Proceed to “Entering the Card ID (System Name) Through the Config Menu” on page 37.	<input type="checkbox"/>

Installer Signature 	Date
---	------

Entering the Card ID (System Name) Through the Config Menu

```

Main Monitor History Config Test Inventory Quit Help
+-----+
| T1/E1 Ports      |
| DS3 Port         |
| Password         |
| Date and Time    |
| Card ID         |
| +-----+       |
| | Enter Card ID  : ADC |
| +-----+       |
| Maintenance Port |
| Circuit IDs      |
| Restore Defaults |
+-----+

ID: | Card 'A'                               10/01/01 10:42:47          ALARMS: NONE

```

Figure 24. Setting the Card ID Through the HXU-358



```

Main Monitor History Config Test Inventory Quit Help
+-----+
| T1/E1 Ports      |
| DS3 Port         |
| Password         |
| Date and Time    |
| System Options |
| +-----+       |
| | Card ID      :      |
| | System ID (SID) :      |
| | IP Address      : 192.168.0.55 |
| | IP Mask         : 255.255.255.0 |
| | IP Gateway      : 0.0.0.0      |
| +-----+       |
| Restore Defaults |
+-----+

ID: | Card 'B'                               10/01/01 15:48:09          ALARMS: NONE

```

Figure 25. Setting the Card ID Through the HXU-360

Step	Procedure	Installer Check ✓
	 <p>Use ←, ↑, →, ↓ to navigate through multiplexer menu options and settings.</p>	
1	<p>To select the Card ID for the HXU-358:</p> <ul style="list-style-type: none"> From the Config menu, select Card ID and then press ENTER. For more information on navigating through the menu system, refer to the procedures detailed in “Setting Up Basic System Parameters Through the Config Menu” on page 35. <p>To select the Card ID for the HXU-360:</p> <ul style="list-style-type: none"> From the Config menu, select System Options and then press ENTER. 	<input type="checkbox"/>
2	<p>Type the system name after Enter Card ID (for the HXU-358) or Card ID (for the HXU-360) and then press ENTER.</p>  <p>System ID (SID) must match the Wideband 3190 HMU System ID. See “Setting the Shelf Identifier (Option D)” on page 31 for instructions on setting the HMU SID.</p> <p>Disregard IP Address, IP Mask, and IP Gateway. These settings do not apply to the Wideband 3190 chassis.</p>	<input type="checkbox"/>
3	<p>Return to the Config menu by pressing ESC.</p>	<input type="checkbox"/>
4	<p>Proceed to “Configuring DS1 Services Through the Config Menu” on page 39.</p>	<input type="checkbox"/>

Installer Signature 	Date
---	------

Configuring DS1 Services Through the Config Menu

```


Main Monitor History Config Test Inventory Quit Help
+-----+
|          | Ports |
+-----+
| Port  Srvc Mode  LBO  Code  T1/E1 | Port  Srvc Mode  LBO  Code  T1/E1 |
|  1    IN-SRVC   133  B8ZS  T1    |  15   OUT-OF-SRVC  133  B8ZS  T1    |
|  2    IN-SRVC   133  B8ZS  T1    |  16   OUT-OF-SRVC  133  B8ZS  T1    |
|  3    IN-SRVC   133  B8ZS  T1    |  17   OUT-OF-SRVC  133  B8ZS  T1    |
|  4    IN-SRVC   133  B8ZS  T1    |  18   OUT-OF-SRVC  133  B8ZS  T1    |
|  5    MAINTENANCE 133  B8ZS  T1    |  19   OUT-OF-SRVC  133  B8ZS  T1    |
|  6    MAINTENANCE 133  B8ZS  T1    |  20   OUT-OF-SRVC  133  B8ZS  T1    |
|  7    MAINTENANCE 133  B8ZS  T1    |  21   OUT-OF-SRVC  133  B8ZS  T1    |
|  8    MAINTENANCE 133  B8ZS  T1    |  22   OUT-OF-SRVC  133  B8ZS  T1    |
|  9    MEM-ADMIN  266  B8ZS  T1    |  23   OUT-OF-SRVC  133  B8ZS  T1    |
| 10    MEM-ADMIN  399  B8ZS  T1    |  24   OUT-OF-SRVC  133  B8ZS  T1    |
| 11    MEM-ADMIN  533  B8ZS  T1    |  25   OUT-OF-SRVC  133  B8ZS  T1    |
| 12    MEM-ADMIN  655  B8ZS  T1    |  26   OUT-OF-SRVC  133  B8ZS  T1    |
| 13    OUT-OF-SRVC 133  B8ZS  T1    |  27   OUT-OF-SRVC  133  B8ZS  T1    |
| 14    OUT-OF-SRVC 133  B8ZS  T1    |  28   OUT-OF-SRVC  133  B8ZS  T1    |
+-----+

Use <Spacebar> to cycle through option settings and <Enter> to activate


ID: | Card 'A'                               10/01/01 10:42:47                ALARMS: NONE

```

Figure 26. Setting the T1/E1 Ports through the HXU-358 or HXU-360

Step	Procedure	Installer Check
	 Use ←, ↑, →, ↓ to navigate through multiplexer menu options and settings.	✓
1	From the Config menu, select T1/E1 Ports and then press ENTER . For more information on navigating through the menu system, refer to the procedures detailed in “Setting Up Basic System Parameters Through the Config Menu” on page 35.	<input type="checkbox"/>
2	To configure any of the 28 ports, select the port and change its Srvc Mode to MEM-ADMIN by pressing the SPACEBAR , and then press ENTER .	<input type="checkbox"/>
3	Configure the following options: <ul style="list-style-type: none"> • Type of service T1 or E1 (T1 default) • Line code for T1 (Code) <ul style="list-style-type: none"> – AMI – B8ZS (default) • Line code for E1 (Code) <ul style="list-style-type: none"> – HDB3 • Line buildout (LBO) options for the channel (133 [default], 266, 399, 533, or 655 feet). Pertains to T1 only, not applicable for E1. 	<input type="checkbox"/>

Continued

Step	Procedure (Continued)	Installer Check ✓
	 <p>In the HMS-358 system, these settings must match the HLU settings (not the default settings). If an HCC-319 List 1 and List 2 cut-through card is used, these settings should match those of the external line connected to the port.</p>	
4	Repeat Steps 1 and 3 for each service you are configuring.	<input type="checkbox"/>
5	Proceed to “ Configuring the DS3 Transport Through the Config Menu ” on page 41.	<input type="checkbox"/>

Installer Signature 	Date
---	------

Configuring the DS3 Transport Through the Config Menu

```


Main Monitor History Config Test Inventory Quit Help
+-----+
|          T1/E1 Ports|
|          DS3 Port  |
+-----+
| Service Mode(OUT OF SERVICE,IN SERVICE..): MEMORY ADMIN |
| Protection Mode (PROTECTED,UNPROTECTED)  : PROTECTED   |
| DS3 Mode (M13,C-BIT)                      : M13         |
| Line Buildout (100FT,450FT)                : 100FT        |
| Transmit Timing (LOCAL,LOOP)               : LOCAL        |
| BER Threshold (E-03,E-06,E-09)             : E-03         |
| RAI upon DS1 Loopback (DISABLED,ENABLED)  : DISABLED    |
+-----+
|          Restore Defaults|
+-----+

Use <Spacebar> to cycle through option settings and <Enter> to activate

ID: | Card 'A'          10/01/01 10:42:47          ALARMS: NONE

```

Figure 27. Setting the DS3 Port Through the HXU-358 or HXU-360

Step	Procedure	Installer Check ✓
1	From the Config menu, select DS3 Port and then press ENTER . For more information on navigating through the menu system, refer to the procedures detailed in “Setting Up Basic System Parameters Through the Config Menu” on page 35.	<input type="checkbox"/>
2	Select Service Mode , press the SPACEBAR to select MEM-ADMIN, then press ENTER . No configuration changes can be made unless the Service Mode is configured as MEM-ADMIN.	<input type="checkbox"/>
3	If this is a dual multiplexer application, Protection Mode is automatically set to PROTECTED.	<input type="checkbox"/>
4	In most applications, Operating Mode should be set to M13.	<input type="checkbox"/>
5	Set Line Buildout to 100FT (default) or 450FT.	<input type="checkbox"/>
	 In most applications Transmit Timing should be set to LOCAL.	
6	Set the BER Threshold to E-03 (default), E-06, or E-09. (This sets the Bit Error Rate [BER] point at which an alarm is declared and protection switching occurs.)	<input type="checkbox"/>
7	Set the RAI upon DS1 Loopback to DISABLED (default) or ENABLED. (RAI = Remote Alarm Indication)	<input type="checkbox"/>
8	When you are finished configuring the DS3 Port, select Service Mode and change it to IN SERVICE.	<input type="checkbox"/>
9	Exit the Shelf Options screen.	<input type="checkbox"/>

Continued

Step	Procedure (Continued)	Installer Check ✓
10	Exit the Network Status screen by pressing ESC , then ENTER .	<input type="checkbox"/>
11	If you plan to install a fan assembly, proceed to “Installing a Fan Assembly (Optional)” on page 53; otherwise, proceed to “Installing a Line Unit (HLU)” on page 55.	<input type="checkbox"/>

Installer Signature 	Date
---	------

INSTALLING THE HXU-359 MULTIPLEXER CARD

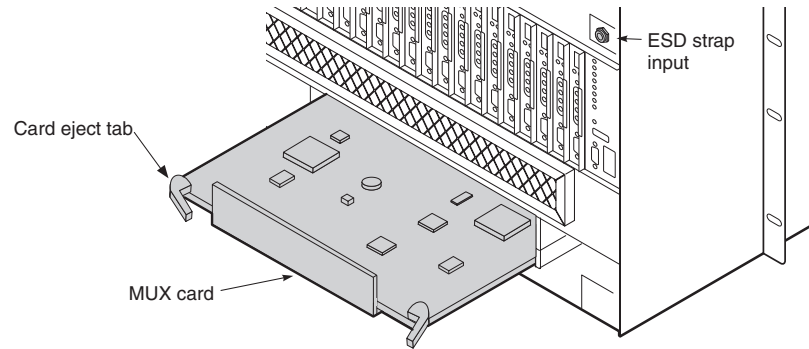




Figure 28. Installing an HXU-359

Step	Procedure	Installer Check ✓																		
	 <p>Whenever installing or removing units from the HMS-359 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>																			
1	Unscrew the two hold-down lugs on each side of the chassis front cover. The cover folds down.	<input type="checkbox"/>																		
2	Plug your ESD strap into the ESD input on the front of the chassis.	<input type="checkbox"/>																		
3	<p>For an HMU-managed Wideband 3190, verify that switches 3 and 5 on the SW2 switch block located on the circuit board are set to the OFF position (default). Switch 3 (OFF) activates the (Open Span Termination System (OSTS) protocol for the backplane. Switch 5 (OFF) activates the HMU craft port for management. All other positions should be off. (ON position is towards the front panel. OFF position is towards the card-edge connector.)</p> <div data-bbox="852 1239 941 1375" style="text-align: center;"> <p>OFF ON</p> <table border="1"> <tr><td>1</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>2</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>3</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>4</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>5</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> <tr><td>6</td><td><input type="checkbox"/></td><td><input type="checkbox"/></td></tr> </table> </div>	1	<input type="checkbox"/>	<input type="checkbox"/>	2	<input type="checkbox"/>	<input type="checkbox"/>	3	<input type="checkbox"/>	<input type="checkbox"/>	4	<input type="checkbox"/>	<input type="checkbox"/>	5	<input type="checkbox"/>	<input type="checkbox"/>	6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1	<input type="checkbox"/>	<input type="checkbox"/>																		
2	<input type="checkbox"/>	<input type="checkbox"/>																		
3	<input type="checkbox"/>	<input type="checkbox"/>																		
4	<input type="checkbox"/>	<input type="checkbox"/>																		
5	<input type="checkbox"/>	<input type="checkbox"/>																		
6	<input type="checkbox"/>	<input type="checkbox"/>																		
	 <p>The HXU-359 default dip switch settings are set for Wideband 3190 operation and should not be modified.</p>																			
4	Align the edges of the HXU-359 with the slot guides in the multiplexer tray.	<input type="checkbox"/>																		
5	Grasping the card eject tabs, gently push the card into the bay.	<input type="checkbox"/>																		
6	Firmly press in on the tabs until the card snaps into place. The LEDs flash momentarily. The Power LED and Active LED on the active multiplexer remain illuminated. The LEDs on the inactive (standby) multiplexer should be off, except for the Power LED.	<input type="checkbox"/>																		
7	Repeat Step 3 through Step 6 for the other HXU-359.	<input type="checkbox"/>																		
8	Proceed to “Setting Up Basic System Parameters Through the Config Menu” on page 44 .	<input type="checkbox"/>																		

Installer Signature	Date
---------------------	------

Setting Up Basic System Parameters Through the Config Menu

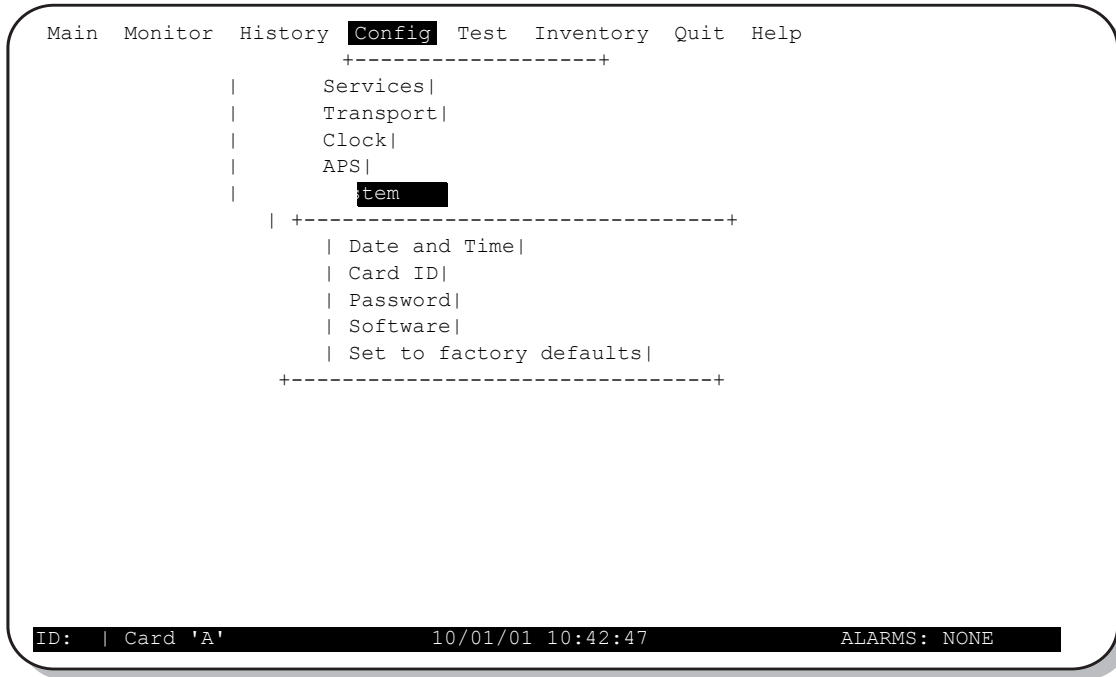


Figure 29. Setting the Date and Time Through the HXU-359

Step	Procedure	Installer Check
	The following procedure assumes proper TAO login. For proper login procedure, please refer to “Using the Terminal Access Option” on page 28.	✓
1	From the Network Status screen, type the number of the desired shelf ID (1 through 32), and then press ENTER .	<input type="checkbox"/>
2	From the Shelf Status screen, press O to select Shelf Options.	<input type="checkbox"/>
3	From the Shelf Options screen, press E to configure the Mux Type.	<input type="checkbox"/>
4	Press 3 for HXU-359.	<input type="checkbox"/>
5	Press X to exit the screen, then press Y to confirm and save the setting and return to the root menu of the Shelf Status screen.	<input type="checkbox"/>
6	From the Shelf Status screen, select M .	<input type="checkbox"/>
7	Select the Config menu, choose System , and then press ENTER .	<input type="checkbox"/>

Step	Procedure (Continued)	Installer Check ✓
8	Proceed to “Entering the Card ID (System Name) Through the Config Menu” on page 37.	<input type="checkbox"/>

Installer Signature 	Date
---	------

Entering the Card ID (System Name) Through the Config Menu

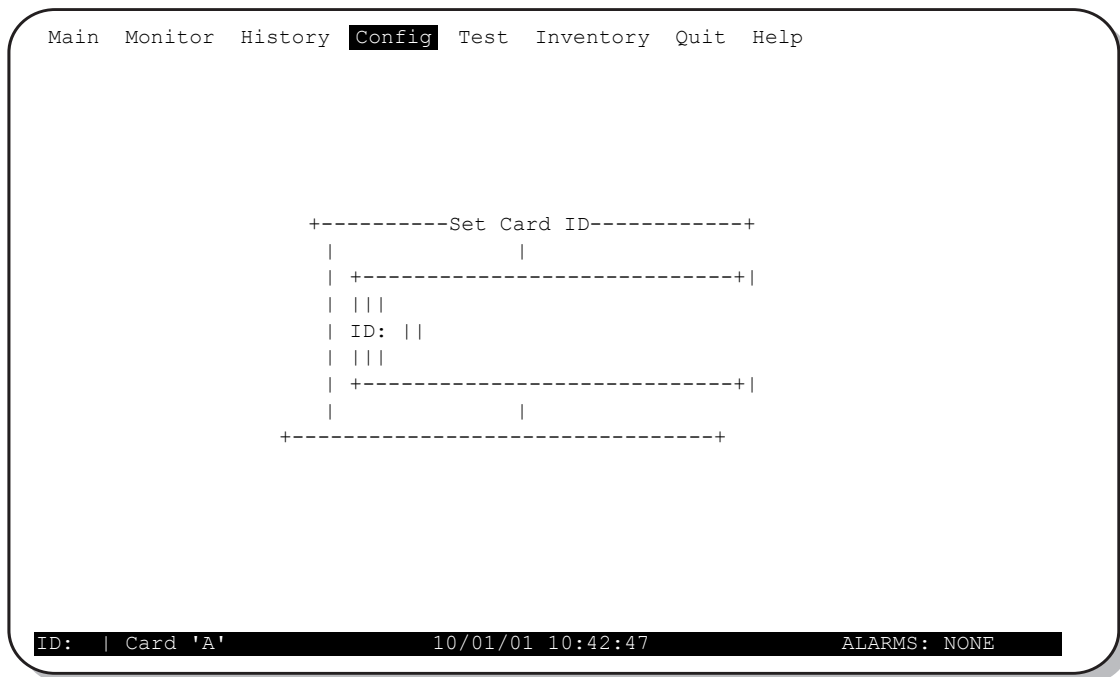



Figure 30. Setting the Card ID Through the HXU-359

Step	Procedure	Installer Check ✓
1	From the System submenu, choose Card ID , and then press ENTER .	<input type="checkbox"/>
	 Card ID is used to identify multiplexer to STS-1 network connection.	
2	Type a name for the card (network element name), and then press ENTER . The name typed is attached to both cards in a protected system. Card A is the multiplexer in slot A; Card B is the multiplexer in slot B.	<input type="checkbox"/>
3	Exit the Config menu by pressing ESC .	<input type="checkbox"/>

Step	Procedure (Continued)	Installer Check
4	Proceed to “Setting the System Clock Synchronization Through the Config Menu” on page 47.	<input type="checkbox"/>

Installer Signature 	Date
---	------

Setting the System Clock Synchronization Through the Config Menu

```

Main Monitor History Config Test Inventory Quit Help

+-----Clock Configuration-----+
|                                     |
| +-----+                           |
| | Primary Reference:Bits A||         |
| |   DS1 speed||                     |
| | Secondary Reference:Bits A||       |
| |   DS1 speed||                     |
| | Timing Reference Switching:Revertive||
| | Force:Normal| |                   |
| +-----+                           |
|                                     |
| (TAB) next field (Spacebar) next value (ENTER) activate (ESC) quit|
|                                     |
+-----+

ID: | Card 'A'                10/01/01 10:42:47          ALARMS: NONE

```

Figure 31. Setting the Clock Configuration Through the HXU-359

Step	Procedure	Installer Check ✓
1	From the Config submenu, choose Clock , and then press ENTER . For more information on navigating through the menu system, refer to the procedures detailed in “Setting Up Basic System Parameters Through the Config Menu” on page 44.	<input type="checkbox"/>
2	Press the SPACEBAR to select the next value, and press TAB to select next field. Configure the following options: <ul style="list-style-type: none"> • Bits A DS1 speed (default) or E1 speed • Bits B DS1 speed (default) or E1 speed • Internal • Transport • Service #1 ~ 28 	<input type="checkbox"/>

Continued

Step	Procedure (Continued)	Installer Check ✓
3	Set the Secondary Reference and press TAB to select speed for synchronization. Configure the following options: <ul style="list-style-type: none"> • Bits A DS1 speed (default) or E1 speed • Bits B DS1 speed (default) or E1 speed • Internal • Transport • Service #1 ~ 28 	<input type="checkbox"/>
4	Set the Timing Reference Switching . Setting the timing reference to Revertive causes the clock to revert to the primary clock when it is valid. Configure the following options: <ul style="list-style-type: none"> • Revertive (default) • Non-revertive 	<input type="checkbox"/>
5	To manually force the clock synchronization mode, set Force to the desired mode. Configure the following options: <ul style="list-style-type: none"> • Normal (default) • Primary • Secondary • Internal • Hold-over 	<input type="checkbox"/>
6	Return to the Config menu by pressing ESC .	<input type="checkbox"/>
7	Proceed to “Configuring DS1 Services Through the Config Menu” on page 49.	<input type="checkbox"/>

 Installer Signature 

Date



A service or transport must be configured as In-Service (IS) prior to being selected as the synchronization source.


Configuring DS1 Services Through the Config Menu

```


Main Monitor History Config Test Inventory Quit Help
+-----Services Configuration-----+
| #   ModeTypeCodeLBOlPbkVtGVTS|
| 01  OOS-ADS1B8ZS131ftNONE00|
| 02  OOS-ADS1B8ZS131ftNONE12|
| 03  OOS-ADS1B8ZS131ftNONE13|
| 04  OOS-ADS1B8ZS131ftNONE14|
| 05  OOS-ADS1B8ZS131ftNONE21|
| 06  OOS-ADS1B8ZS131ftNONE22|
| 07  OOS-ADS1B8ZS131ftNONE23|
| 08  OOS-ADS1B8ZS131ftNONE24|
| 09  OOS-ADS1B8ZS131ftNONE31|
| 10  OOS-ADS1B8ZS131ftNONE32|
| 11  OOS-ADS1B8ZS131ftNONE33|
| 12  OOS-ADS1B8ZS131ftNONE34|
| 13  OOS-ADS1B8ZS131ftNONE41|
| 14  OOS-ADS1B8ZS131ftNONE42|
| (N)ext page (P)rev page (T)op (B)ottom (ENTER) edit srv. (ESC) quit|
| +-----+|
| | 01  OOS-ADS1B8ZS131ftNONE00|||
| +-----+|
| (TAB) next field (Spacebar) next value (ENTER) activate (ESC) quit|
+-----+
ID: | Card 'A' | 10/01/01 10:42:47 | ALARMS: NONE

```

Figure 32. Setting Up DS1 Services Through the HXU-359

Step	Procedure	Installer Check ✓
1	From the Config submenu, choose Services , and then press ENTER . For more information on navigating through the menu system, refer to the procedures detailed in “Setting Up Basic System Parameters Through the Config Menu” on page 44.	<input type="checkbox"/>
2	Select a DS1 service port, then press ENTER . The configuration bar at the bottom of the screen should show your selection.	<input type="checkbox"/>
3	If the selected DS1 port is configured as IS , OFF , or OSS-M (Mode field): <ul style="list-style-type: none"> Press the TAB key to select the Mode field. Press the SPACEBAR to select OOS-A (default). Press ENTER. 	<input type="checkbox"/>
4	Choose the type of service (DS1).  Units do not support E1 type service.	<input type="checkbox"/>
5	Choose the type of line code [B8ZS (default) or AMI].	<input type="checkbox"/>
6	Choose the line buildout for the DS1 port [131 (default), 262, 393, 524, or 655 ft.].	<input type="checkbox"/>

Continued

Step	Procedure (Continued)	Installer Check ✓
	 <p>Line load, line type, and line buildout must match the HCU card in use. These settings should be set to the default values. If an HCC-319 List 1 and List 2 cut-through card is used, these settings should match those of the external line connected to the port.</p>	
7	Select the Virtual Tributary Group (VTG) 1 through 7 and the Virtual Tributary Slot (VTS) 1 through 4 . Only available combinations are presented for selection.	<input type="checkbox"/>
8	When finished configuring the port, reset the port to IS to place the line unit in service, then press ENTER .	<input type="checkbox"/>
9	Return to the Config menu by pressing ESC .	<input type="checkbox"/>
10	Proceed to “Configuring the STS-1 Transport Through the Config Menu” on page 51.	<input type="checkbox"/>

Installer Signature 	Date
---	------



Do not configure a service as OOS-M or OOS-A when it is selected as a clock synchronization source.

Configuring the STS-1 Transport Through the Config Menu

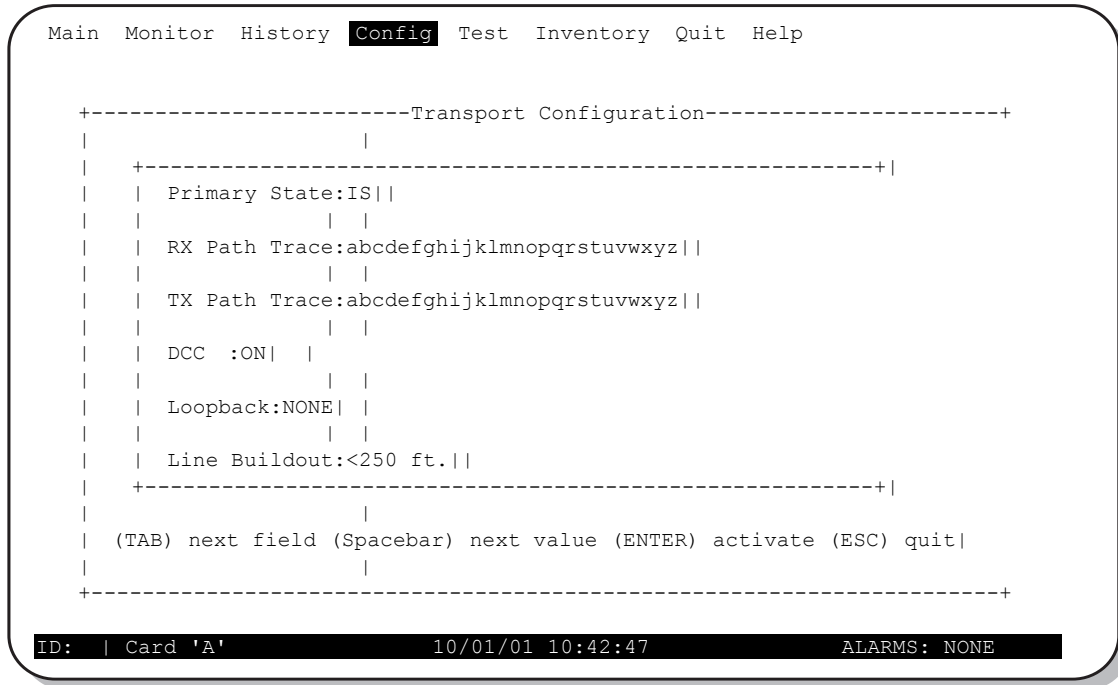



Figure 33. Setting Up the STS-1 Transport Through the HXU-359

Step	Procedure	Installer Check ✓
1	From the Config submenu, choose Transport , and then press ENTER . For more information on navigating through the menu system, refer to the procedures detailed in “Setting Up Basic System Parameters Through the Config Menu” on page 44.	<input type="checkbox"/>
2	Set Primary State to OOS-A using the SPACEBAR , and then press ENTER .  Do not configure the transport as OOS-M or OOS-A when it is selected as a clock synchronization source.	<input type="checkbox"/>
3	Select Transport and then press ENTER .	<input type="checkbox"/>
4	Type the Tx Path Trace transmit path trace string. The string cannot be longer than 40 characters.	<input type="checkbox"/>
5	Set the Data Communications Channel (DCC) to ON .	<input type="checkbox"/>
6	Set Loopback to NONE and then press ENTER .	<input type="checkbox"/>
7	Set Line Buildout option to either >250 ft. or <250 ft. and then press ENTER .	<input type="checkbox"/>
8	Set Primary State to IS and press ENTER .	<input type="checkbox"/>

Continued

Step	Procedure (Continued)	Installer Check ✓
9	Exit the Transport Configuration screen by pressing ESC .	<input type="checkbox"/>
10	If you plan to install a fan assembly, proceed to “Installing a Fan Assembly (Optional)” on page 53; otherwise, proceed to “Installing a Line Unit (HLU)” on page 55.	<input type="checkbox"/>

Installer Signature 	Date
---	------

INSTALLING A FAN ASSEMBLY (OPTIONAL)

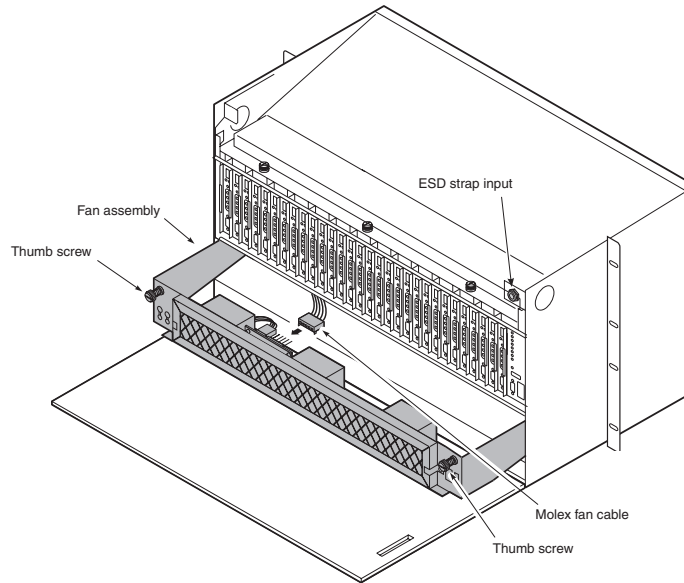



Figure 34. *Installing the Fan Assembly (Cover Down)*

The HFA-357 fan assembly is installed from the front of the chassis, above the multiplexer tray.



The fans begin operating as soon as the cable is connected. Avoid contact with the fan blades and do not allow any foreign matter to obstruct the operation of the fan blades.


Do not install fans without connecting the cable. A fan assembly that is not operational will block airflow and cause overheating.

Step	Procedure	Installer Check ✓
	 <p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input above the HMU slot on the inside of the chassis.</p>	
1	Unscrew the two hold-down lugs on each side of the chassis front cover. The cover folds down.	<input type="checkbox"/>
2	Plug your ESD wrist strap into the ESD input above the HMU slot.	<input type="checkbox"/>
3	Locate the keyed Molex fan cable (connected to the inside of the chassis) and attach it to the circuit board on the fan assembly. The fans begin operating as soon as the cable is connected.	<input type="checkbox"/>
4	Slide the fan assembly into the opening above the multiplexer tray.	<input type="checkbox"/>
5	Secure the fan assembly in place with the hold-down lugs (one at each corner of the assembly).	<input type="checkbox"/>
6	Proceed to “Placing the Fan Under HMU Management” on page 54.	<input type="checkbox"/>

Installer Signature 

Date

Placing the Fan Under HMU Management

Step	Procedure	Installer Check ✓
	 <p>The following procedure assumes proper TAO login. For proper login procedure, please refer to “Using the Terminal Access Option” on page 28.</p>	
1	From the Network Status screen (for multishelf configurations), type the number of the desired shelf (1 through 32), and then press ENTER .	<input type="checkbox"/>
2	From the Shelf Status screen, press O to select Shelf Options.	<input type="checkbox"/>
3	From the Shelf Options screen, press K to select Fan Monitoring.	<input type="checkbox"/>
4	Press 2 to turn on fan monitoring.	<input type="checkbox"/>
5	Press X to exit the screen, then press Y to confirm and save the setting.	<input type="checkbox"/>
6	Verify that the fans are running properly and that no alarms are indicated on the Shelf Status screen. Fan alarms and failures are now monitored by the HMU.	<input type="checkbox"/>
7	Proceed to “Installing a Line Unit (HLU)” on page 55.	<input type="checkbox"/>



The fan assembly filter should be changed when dirty—normally every six to nine months.

- 1 To remove the filter, slightly loosen the bracket screws that secure the two filter brackets.
- 2 Move the brackets aside and slide out the filter.
- 3 Insert the new filter, adjust the brackets and tighten the bracket screws.

Installer Signature 

Date

INSTALLING A LINE UNIT (HLU)

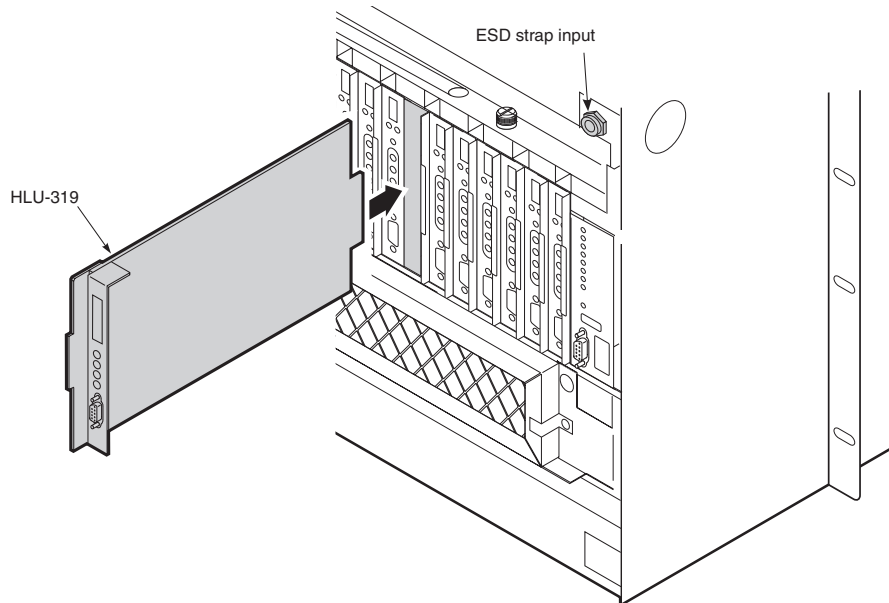


Figure 35. Installing a Line Unit into the Wideband 3190 Chassis

Step	Procedure	Installer Check ✓
	<p data-bbox="342 1066 431 1150"></p> <p data-bbox="472 1056 1435 1108">Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>	
1	Open the chassis front cover by unscrewing the two hold-down lugs on the upper corners. The cover folds down.	<input type="checkbox"/>
2	Be sure to plug your ESD wrist strap into the ESD above the HMU slot.	<input type="checkbox"/>
3	Lift the retention bar at the top of the chassis to allow insertion of the module.	<input type="checkbox"/>
4	Slide the line unit into the card guides for the desired slot, then push the unit in until it touches the backplane card-edge connector and the retaining latch on the front panel opens (Figure 35).	<input type="checkbox"/>
5	Place your thumbs on the line unit front panel and push the line unit into the card-edge connector until it is entirely within the card guides and the retaining latch closes. This indicates that the card is properly seated.	<input type="checkbox"/>
	<p data-bbox="342 1570 431 1654"></p> <p data-bbox="472 1560 1463 1633">Do not enable alarms at this point in the procedure. You will not fully configure the HLU until the line units are placed into service. This procedure is detailed in “Placing the Line in Service” on page 60.</p>	
6	If you plan to install remote units, proceed to “Installing a Remote Unit (HRU)” on page 57, otherwise, proceed to “Setting Up Circuit IDs” on page 59.	<input type="checkbox"/>
7	Pull down the retention bar to secure all the modules in the shelf (Figure 36 on page 56).	<input type="checkbox"/>

Installer Signature

Date

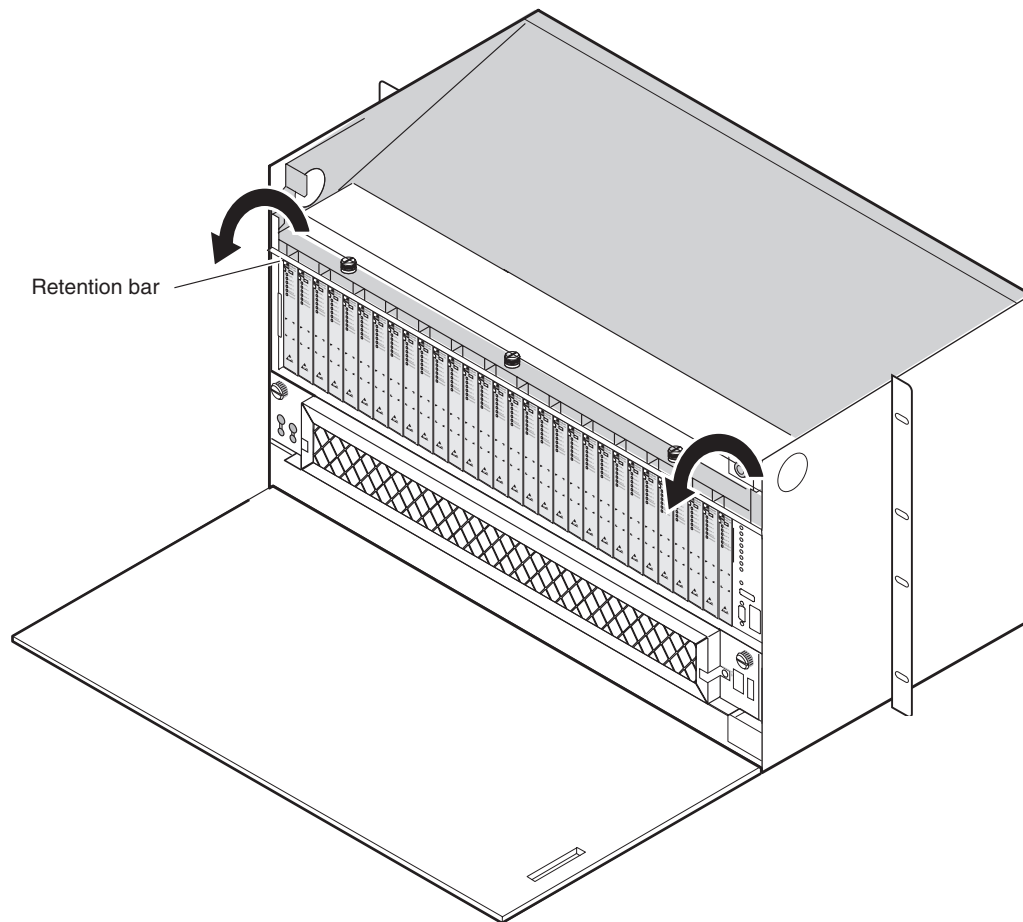


Figure 36. *Securing the Modules with the Retention Bar*

INSTALLING A REMOTE UNIT (HRU)

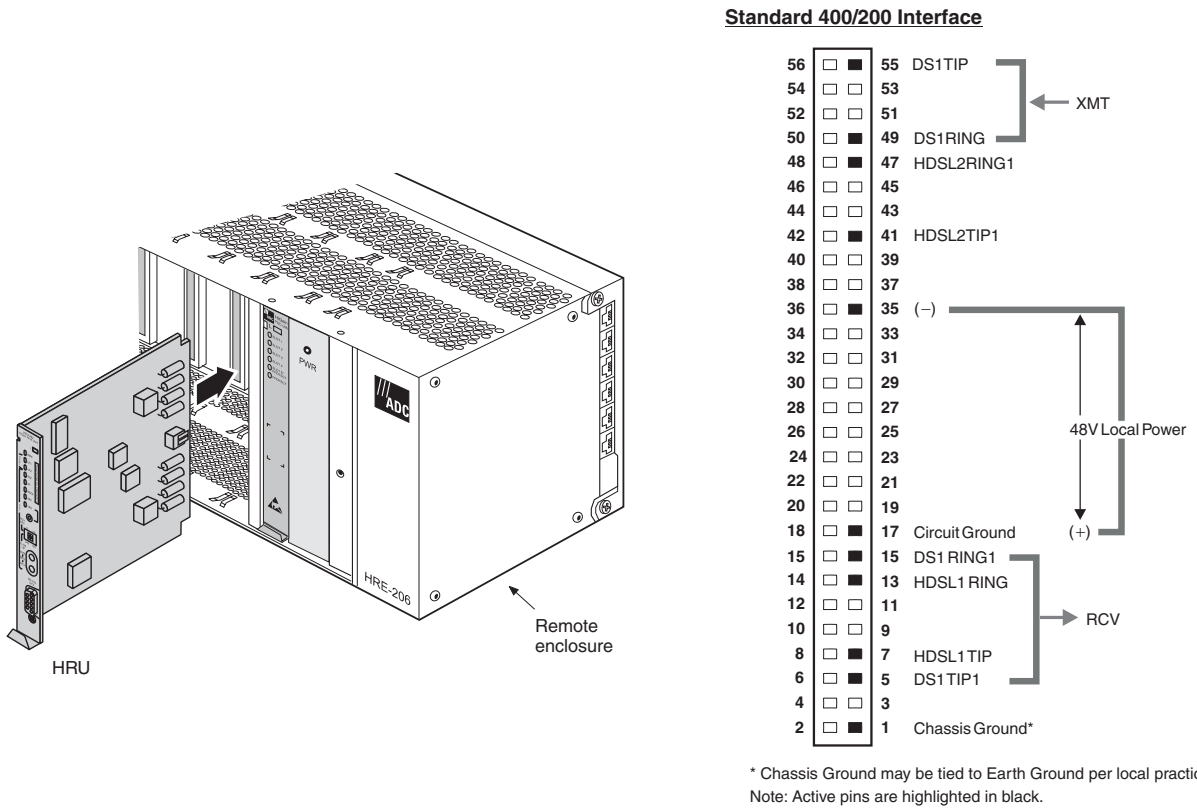


Figure 37. Installing an HRU in a Remote Enclosure

Step	Procedure	Installer Check
	<p>Whenever installing or removing units from a remote enclosure, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>	✓
1	Open the remote enclosure cover.	<input type="checkbox"/>
2	Plug your ESD wrist strap into the ESD above the HMU slot.	<input type="checkbox"/>
3	Set the user options for status LEDs. Refer to the HRU user manual for details. User options usually include setting the: <ul style="list-style-type: none"> • DS1 receive level • TLOS • Sealing current • Local or line power selection 	<input type="checkbox"/>
	<p>Refer to the HRU pinout in Figure 37 if remote chassis is not pre-wired.</p>	

Continued


Step	Procedure (Continued)	Installer Check ✓
4	Slide the remote unit into the card guides for the desired slot, then push the unit into the enclosure until it is seated in the card-edge connector. The unit should snap into place, indicating that the unit is properly seated. The HRU should power up within 30 seconds.	<input type="checkbox"/>
5	Proceed to “ Setting Up Circuit IDs ” on this page.	<input type="checkbox"/>

Installer Signature **Date**



The craft port on an HRU can be accessed for configuration whether or not it is managed by an HMU. Refer to “[Configuring the Management Unit](#)” on page 30 and the HRU user manual for more information about provisioning the HRU.

SETTING UP CIRCUIT IDs

Step	Procedure	Installer Check ✓
	 <p>The following procedure assumes proper TAO login. For proper login procedure, please refer to “Using the Terminal Access Option” on page 28.</p>	
1	From the Shelf Status screen, type the number of the line unit, and then press ENTER .	<input type="checkbox"/>
2	From the Maintenance Terminal Main menu, select H from the Main menu to display the line unit System Inventory screen.	<input type="checkbox"/>
3	Press the corresponding letter of the unit of which you want to change the circuit ID.	<input type="checkbox"/>
4	Type a text string of 32 alphanumeric characters or less to identify the unit and then press ENTER .	<input type="checkbox"/>
5	Press E to exit the System Inventory screen, and then choose C to confirm. If more than 24 characters are typed, a warning beep is emitted and only the first 24 characters are accepted.	<input type="checkbox"/>
6	If you would like to perform a loopback test of the line at this time, follow the instructions provided in the HRU user manual. Loopback testing allows verification of the integrity of the HDSL channel to the HLU as well as the DS1 channel to the customer and the HLU DSX-1 interface. A loopback testing diagram is found on the inside front panel on the chassis as well as in “Installing a Test Card (HTC) (Optional)” on page 66.	<input type="checkbox"/>
7	Repeat Step 1 through Step 6 for each line that you plan to activate.	<input type="checkbox"/>
8	Press ESC to exit the Network Status screen.	<input type="checkbox"/>
9	Proceed to “Placing the Line in Service” on page 60.	<input type="checkbox"/>

Installer Signature 


Date

PLACING THE LINE IN SERVICE

After the line installation is complete, the line must be placed in service by:

- enabling the alarms on the HLU
- placing the DS1 interface in service at the HXU

Placing the HLU Under HMU Management

Step	Procedure	Installer Check ✓
	 <p>The following procedure assumes proper TAO login. For proper login procedure, please refer to “Using the Terminal Access Option” on page 28.</p>	
1	From the Network Status screen, type the number of the desired shelf (1 through 32) and then press ENTER .	<input type="checkbox"/>
2	From the Shelf Status screen, press A to select Alarm Management.	<input type="checkbox"/>
3	Type the slot number of the line unit you want to enable.	<input type="checkbox"/>
4	Press an appropriate Y or N response for the alarm setting you are changing.	<input type="checkbox"/>
5	Proceed to “Placing the Line Unit in Service at the HXU” on page 61.	<input type="checkbox"/>

Installer Signature 	Date
---	------



If an HLU card is hot-swapped while under HMU management, no setup is required. All configuration settings are automatically downloaded from the HMU.



If the HMU is managing the line unit, only the HMU maintenance terminal (ASCII terminal or PC running a terminal emulation program) can configure the line unit.

Removal of the HMU from the chassis enables the front panel craft port on the HLU.

When an HMU is replaced, the new HMU rebuilds its configuration database from the active line units.


Placing the Line Unit in Service at the HXU

The Wideband 3190 interfaces internally to the 28 lines at the common DSX-1 point. Once a line has been configured on the HLU, the DS1 interface at the HXU should be placed In-Service. Some alarm reporting will be lost if the line is not placed In-Service.

The procedure to place a line unit in service varies by the type of multiplexer installed:

- If you have an HXU-358 or HXU-360—DS3 (T1/E1), see “[Placing the Line Unit in Service Using an HXU-358 or HXU-360 Multiplexer](#)” on page 61.
- If you have an HXU-359—STS-1, see “[Placing the Line Unit in Service Using an HXU-359 Multiplexer](#)” on page 63.

Placing the Line Unit in Service Using an HXU-358 or HXU-360 Multiplexer

Step	Procedure	Installer Check ✓
	 <p>The following procedure assumes proper TAO login. For proper login procedure, please refer to “Using the Terminal Access Option” on page 28.</p>	
1	From the Shelf Options screen, select M .	<input type="checkbox"/>
2	Select the Config menu and then press ENTER .	<input type="checkbox"/>
3	Select the T1/E1 Ports menu and then press ENTER .	<input type="checkbox"/>
4	Select the Port #, use the SPACEBAR to select IN-SRVC, and then press ENTER .	<input type="checkbox"/>
5	Press ESC to return the Shelf Status menu.	<input type="checkbox"/>
6	Proceed to “ Enabling Alarms for Systems Using an HXU-358 or HXU-360 Multiplexer ” on page 62.	<input type="checkbox"/>

Installer Signature 	Date
---	------




Once a line is placed In Service under the HXU Configuration Management menu, its provisioning cannot be changed. To reprovision a line, place it in maintenance mode (Unequipped and Out-of-Service). This does not affect changing DS1 parameters under the HLU Maintenance Terminal menu.

Enabling Alarms for Systems Using an HXU-358 or HXU-360 Multiplexer

Step	Procedure	Installer Check ✓
1	From the Shelf Options screen, press A to select Alarm Management. The following prompt appears: Which Line Unit do you want to change the alarm settings on (1-28). (E)nable All, (D)isable All	<input type="checkbox"/>
2	Type the slot number of the line unit you want to enable. When you type a slot number (x), one of the following prompts appears. Do you want to ENABLE alarm settings for Line Unit x (Y/N) Do you want to DISABLE alarm settings for Line Unit x (Y/N)	<input type="checkbox"/>
3	Press an appropriate Y or N response for the alarm setting you are changing.	<input type="checkbox"/>
4	If you plan to install a test card, proceed to “Installing a Test Card (HTC) (Optional)” on page 66. If you plan to install a cut-through card, proceed to “Installing a Cut-Through Card (HCC) (Optional)” on page 67. The Wideband 3190 should now be operational. If you experience any difficulties at this time, refer to “Installing a Test Card (HTC) (Optional)” on page 66.	<input type="checkbox"/>

Installer Signature 	Date
---	------

Placing the Line Unit in Service Using an HXU-359 Multiplexer

Step	Procedure	Installer Check ✓
	 <p>The following procedure assumes proper TAO login. For proper login procedure, please refer to “Using the Terminal Access Option” on page 28.</p>	
1	From the Shelf Options screen, select M .	<input type="checkbox"/>
2	Select the Config menu and then press ENTER .	<input type="checkbox"/>
3	Select the line unit, use the SPACEBAR to select IN-SRVC, and then press ENTER . Confirm that the settings for Type, Code, LBO, LBK, VTG, and VTS are appropriate.	<input type="checkbox"/>
4	Proceed to “Enabling Alarms for Systems Using an HXU-359 Multiplexer” on page 63.	<input type="checkbox"/>

Installer Signature 

Date

Enabling Alarms for Systems Using an HXU-359 Multiplexer

Step	Procedure	Installer Check ✓
1	From the Shelf Options screen, press A to select Alarm Management. The following prompt appears: Which Line Unit do you want to change the alarm settings on (1-28). (E)nable All, (D)isable All	<input type="checkbox"/>
2	Type the slot number of the line unit you want to enable. When you type a slot number (x), one of the following prompts appears. Do you want to ENABLE alarm settings for Line Unit x (Y/N) Do you want to DISABLE alarm settings for Line Unit x (Y/N)	<input type="checkbox"/>
3	Press an appropriate Y or N response for the alarm setting you are changing.	<input type="checkbox"/>
4	If you plan to install a test card, proceed to “Installing a Test Card (HTC) (Optional)” on page 66. If you plan to install a cut-through card, proceed to “Installing a Cut-Through Card (HCC) (Optional)” on page 67. The Wideband 3190 should now be operational. If you experience any difficulties at this time, refer to “Troubleshooting and System Testing” on page 65.	<input type="checkbox"/>

Installer Signature 

Date


Page Intentionally Left Blank

TROUBLESHOOTING AND SYSTEM TESTING

Figure 38 shows system loopbacks and test access points. You can do additional system tests through test cards (see “Installing a Test Card (HTC) (Optional)” on page 66). You can route multiplexer output to provide local access to any DS1 or E1 channel on the DS3 transport at an electrical DSX-1 or E1 cross-connect point using cut-through cards (see “Managing Alarms” on page 69).



Removal and replacement of line units should not be your first approach to troubleshooting. You will lose important performance management information which may help you resolve a line problem. Before making a call to Product Support, read the Performance Management history and conduct voltmeter tests for leakage to determine if the source of trouble is a marginal line or a facility problem.

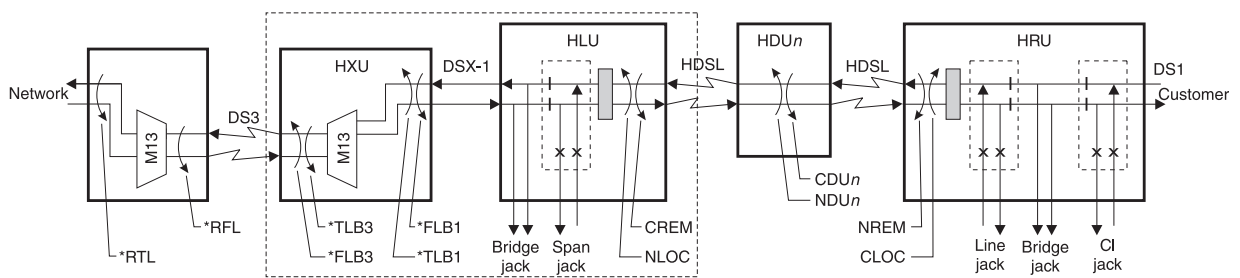

*Copies data in both directions. All other loopbacks send AIS to a disconnected segment.

Figure 38. System Loopbacks and Test Access

Table 9. System Loopback Definitions

Test Point	Loopback Definition
TLB3 (a)(b)	Terminal loopback to the customer at the DS3 line. Activate from the HXU-358 or HXU-360 Test menu.
FLB3 (a)(b)	Facility loopback to the network at the DS3 line. Activate from the HXU-358 or HXU-360 Test menu.
TLB1 (a)(b)	Terminal Loopback to the network at the DSX-1 line. Activate from the HXU-358 or HXU-360 Test menu.
FLB1 (a)(b)	Facility loopback to the customer at the DSX-1 line.
RFL (a)(b)	Remote facility loopback from the far-end DS3 line. Activate from the HXU-358 or HXU-360 Test menu.
RTL (a)(b)	Remote terminal loopback from the far-end DSX-1 line. Activate from the HXU-358 or HXU-360 Test menu.
CREM	Customer remote loopback is activated by selecting the line unit on the Shelf Status Screen and then the Loopback Mode selection from the HLU Maintenance Terminal Main Menu.
NLOC	Network local loopback is activated by selecting the line unit on the Shelf Status screen and then the Loopback Mode selection from the HLU Maintenance Terminal Main Menu.
CDUn (c)	Customer doubler <i>n</i> loopback is activated by selecting the line unit on the Shelf Status screen and then the Loopback Mode selection from the HLU Maintenance Terminal Main Menu.
NDUn (c)	Network doubler <i>n</i> loopback is activated by selecting the line unit on the Shelf Status screen and then the Loopback Mode selection from the HLU Maintenance Terminal Main Menu.
CLOC	Customer local loopback is activated by selecting the line of the Shelf Status screen and then the Loopback Mode selection from the HLU Maintenance Terminal Main Menu.
NREM	Network remote loopback is activated by selecting the line on the Shelf Status Screen and then the Loopback Mode selection from the HLU Maintenance Terminal Main Menu.

(a) To perform this loopback command, the DS3 and T1/E1 ports can be in any mode other than IN-SRVC.

(b) Copies data in both directions. All other loopbacks send AIS to a disconnected segment.

(c) The number of the doubler.

INSTALLING A TEST CARD (HTC) (OPTIONAL)

The HTC-319 List 1 test card provides you with an easy method of testing CO and field Tip and Ring pairs.

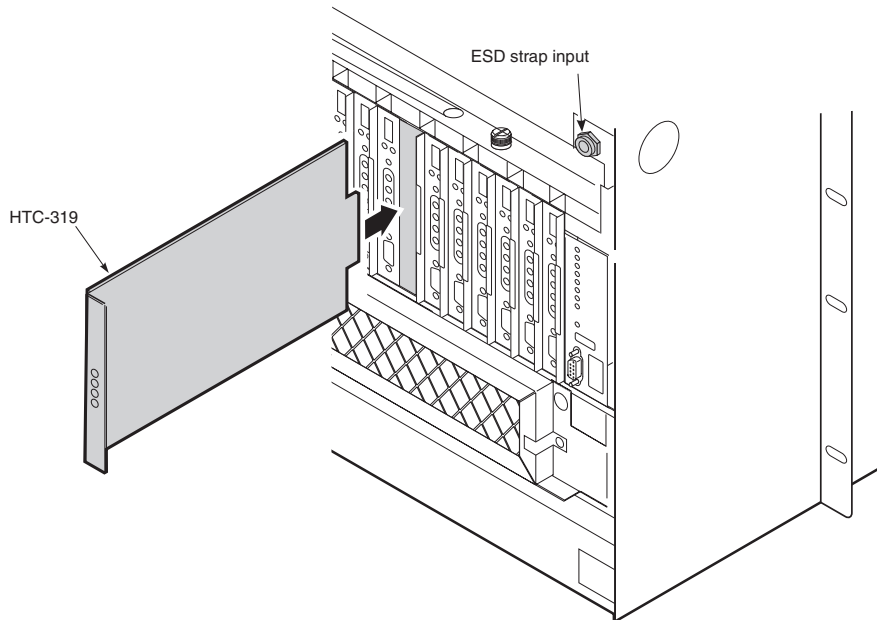



Figure 39. Installing a Test Card into the HMS-358

Step	Procedure	Installer Check ✓
 <p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>		
1	Open the chassis front cover by unscrewing the two hold-down lugs on the upper corners. The cover folds down.	<input type="checkbox"/>
2	Be sure to plug your ESD wrist strap into the ESD above the HMU slot.	<input type="checkbox"/>
3	Lift the retention bar at the top of the chassis to allow insertion of the module.	<input type="checkbox"/>
4	Plug the HTC-319 into the shelf slot whose circuit you want to test.	<input type="checkbox"/>
5	Set the four-position slide switch (S1) on the HTC-319 to the type of test you want to perform (LOOP BACK, LOOP THRU, SHORT, or OPEN).	<input type="checkbox"/>
6	Monitor the circuit at the corresponding test points on the card. The number of each test point corresponds to the edge connector pin of the circuit under test.	<input type="checkbox"/>
7	When testing is complete, remove the test card, pull down the retention bar, close the front cover, and then screw in the two hold-down lugs.	<input type="checkbox"/>
8	If you plan to test a line unit, proceed to “Line Unit Testing” on page 68 . The Wideband 3190 should now be operational. If you experience any difficulties at this time, refer to “Installing a Test Card (HTC) (Optional)” on page 66 .	<input type="checkbox"/>

Installer Signature  _____ Date _____

INSTALLING A CUT-THROUGH CARD (HCC) (OPTIONAL)

The HCC-319 List 1 cut-through card allows you to route the output of multiplexers to HDSL lines. The List 2 card can be configured to route the DSX-1 from the multiplexer to the Port 2 connections.

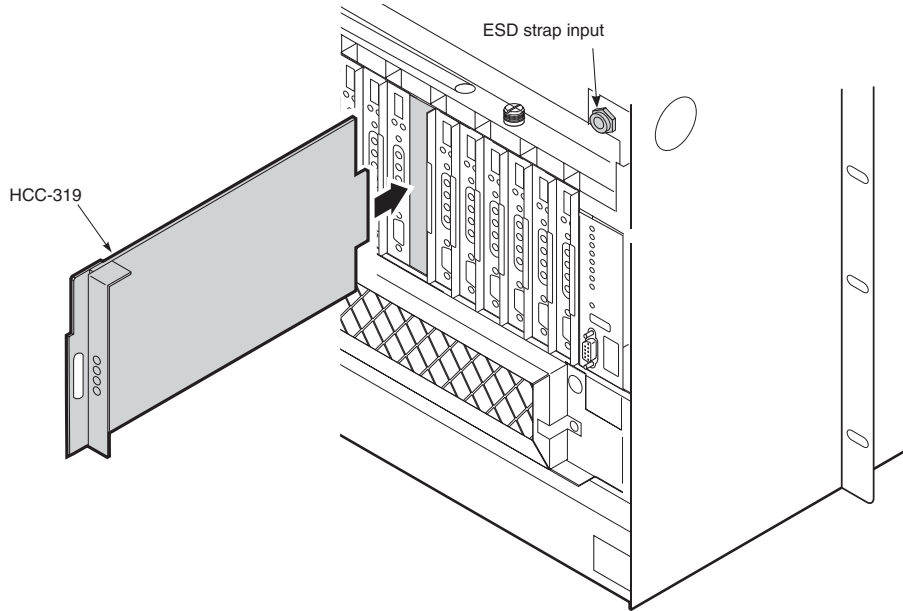



Figure 40. Installing a Cut-Through Card into the HMS-358

Step	Procedure	Installer Check ✓
	 <p>Whenever installing or removing units from the HMS-358 chassis, be sure to wear an antistatic wrist strap and connect it to the ESD strap input.</p>	
1	If you have not already done so, open the chassis front cover by unscrewing the two hold-down lugs on the upper corners. The cover folds down.	<input type="checkbox"/>
2	Be sure to plug your ESD wrist strap into the ESD above the HMU slot.	<input type="checkbox"/>
3	Lift the retention bar at the top of the chassis to allow insertion of the module.	<input type="checkbox"/>
4	Plug the HCC-319 into the shelf slot whose circuit you want to access.	<input type="checkbox"/>
5	Connect standard T1/E1 test equipment to access jack on the front panel to monitor the line.	<input type="checkbox"/>
6	If you plan to test a line unit, proceed to “Line Unit Testing” on page 68. The Wideband 3190 should now be operational. If you experience any difficulties at this time, refer to “Installing a Test Card (HTC) (Optional)” on page 66.	<input type="checkbox"/>

Installer Signature  _____ Date _____

LINE UNIT TESTING

Once the line unit is installed, verify that it is operating properly. To do this, monitor the following:

- Status LED
- Messages reported by the front-panel display.

Verification Without a Downstream Device

If there is no downstream device installed:

Step	Procedure
1	Verify that the line unit powers up. The front-panel display illuminates and reports status messages.
2	Verify that the line unit attempts to communicate with downstream devices (status LED flashes red). Even if a downstream device is not present, the following events should occur: <ul style="list-style-type: none"> • The front-panel display reports various four-character status messages. • The line unit again attempts communication until a downstream device is detected.

Verification With a Downstream Device

If a downstream device has been installed:

Step	Procedure
1	Verify that the line unit powers up. (The front-panel display illuminates and reports various status messages.)
2	Verify that the line unit attempts to communicate with downstream devices (status LED flashes red): <ul style="list-style-type: none"> • If downstream devices are successfully identified and the loop(s) synchronizes, the line unit status LED lights a steady green. The line unit reports normal margin messages on the front-panel display. • If downstream devices are not successfully identified, the line unit reports status messages. The line unit attempts communication again and reports four-character status messages until a downstream device is detected.
3	Verify that a valid DS1 signal has been applied to the line unit and the remote unit. <ul style="list-style-type: none"> • If no DS1 signal is being applied to either the line unit or the remote unit inputs, then the appropriate DS1 alarms (LLOS or RLOS) display on the front panel and the status LED flashes red. • If a valid DS1 signal is being supplied to the line unit and remote unit, then DS1 alarm indications should be absent and the status LED lights a steady green.
4	If you need more information on managing line units, see the user manual for the respective unit. If you need more information on managing alarms, see “Managing Alarms” on page 69 .

MANAGING ALARMS

The Wideband 3190 system reports alarms from the shelf, the line units, the fan assembly and the multiplexer unit.

The HMS-358 displays an alarm summary on the HMU at all times. Any alarm that exists in the system is represented by a critical, major or minor alarm LED on the HMU front panel. The alarm LEDs on each HLU in the system provide additional fault isolation. In general, the HLU or HXU with an active red alarm LED is the unit directly associated with a fault.

The M13 function is provided by two multiplexer cards wired in parallel. Both monitor the DS3 and DS1 interfaces and check for proper bit rate and line coding. If an error exists on these interfaces, both HXU cards issue an alarm. A missing HLU or HRU creates a faulty DS1 signal and causes the active and standby HXU to issue a line alarm. Unused ports on the multiplexer must be configured as Unequipped and Out-of-Service to prevent them from reporting alarms to the system.



For complete information on managing alarms, consult the quick installation guide and user manual for each multiplexer in your system.

HMU ALARMS

The HMU-319 reports Critical, Major, and Minor alarms.

- CR: A critical alarm is generated if:
 - power to the shelf or one of the A/B feeds has been lost, causing the Visible and Audible Critical Alarms to be asserted.
 - shelf temperature exceeds 170°F / 77°C, causing the Visible and Audible Critical Alarms to be asserted.
 - the multiplexer reports a Critical alarm.
- MJ: A major alarm is generated if:
 - any line card issues a fuse alarm.
 - shelf temperature exceeds 113°F / 45°C.
 - the multiplexer reports a Major alarm.
- MN: A minor alarm is generated if:
 - there is loss of sync on an HDSL loop.
 - the multiplexer is enabled, but not present.
 - there is loss of T1 signal at either the line unit or remote unit.
 - the HDSL loop margin falls below the selected margin threshold.
 - the multiplexer reports a Minor alarm.

When any critical, major or minor alarm occurs, the following events result:

- The HMU activates the appropriate audio and visual alarm relay circuits. These alarm relay circuits activate an external audio or visual alarm, if connected as discussed.
- The appropriate alarm LEDs light on the HMU front panel.
- The management interface displays the alarm status on the Shelf Status screen (after the screen is updated).

To silence the alarm, do one of the following:

- Press the ACO pushbutton on the front panel of the HMU.
- Press the external ACO pushbutton (if installed).

The following events occur:

- The front panel ACO LED lights and remains lit until the original alarm is cleared or until another alarm occurs.
- The audio alarm relay circuits are disabled, causing any connected audio alarms to turn off.

HXU ALARMS

The HXU reports Critical, Major, Minor and Far End alarms to the HMU.

- **CRITICAL:** The HXU reports a critical alarm if it detects:
 - a critical service-affecting fault.
 - more than four faulty DS1 inputs or DS2 failure.
- **MAJOR:** A major alarm is generated if the HXU detects:
 - up to four faulty DSX-1 lines.
 - one or more faulty DS1 inputs.
 - a major service-affecting fault.
- **MINOR:** The HXU reports a minor alarm if it detects:
 - a potential service-affecting fault condition.
 - a DS3 Far-End alarm.
 - a low-speed loopback.
 - a DS3 loopback.
- **ABNORMAL:** The HXU reports an Abnormal alarm if it detects:
 - DS3 Receive condition (AIS or Idle).
 - Power A or Power B alarm.
- **FAR END:** The HXU reports a Far End alarm if the far end of the DS3 has an alarm.

LINE UNIT ALARMS

The Shelf Status menu reports the alarm status for each line unit. This includes both physical alarms (LOS ALARM BUS and FUSE ALARM BUS) as well as alarm messages shown in [Table 10](#).

The LOS ALARM BUS field on the Shelf Status menu indicates when any unmanaged line unit (or any other non-manageable card installed in the shelf) is reporting a minor alarm on pin H of the line unit edge connector. Refer to the shelf and line unit user manuals for information on using pin H.

The FUSE ALARM BUS field on the Shelf Status menu indicates when any line unit (or any other card installed in the shelf) is reporting a fuse alarm on pin 10 of the line unit edge connector. Refer to the shelf and line unit user manuals for information on pin 10.



The line unit H1ES, H2ES, and DS1 Errored Seconds Threshold alarms are not supported by the Shelf Status menu. If any of these conditions exist on a line unit, the line unit status indicates NORMAL. For this reason, use of the line unit Errored Seconds Threshold alarm option is not recommended. Refer to the line unit documentation for instructions on setting the Errored Seconds Threshold option.

Table 10. Line Unit Alarm Messages

Alarm Message	Definition	Description
LOSW	Loss Of Sync Word	Loss of signal on an HDSL span.
RLOS	Remote Loss Of Signal	Loss of DS1 signal at the remote unit.
LLOS	Local Loss Of Signal	Loss of DSX-1 signal at the line unit.
MAL1, MAL2	Margin Alarm 1, Margin Alarm 2	Loop margin has dropped below the user-set, minimum threshold level.
NORMAL		No alarm condition exists.
UNKNOWN		Line unit failed to respond to status requests.



Enable the ALM (alarm) option of an unmanaged line unit to allow the unit to trigger an alarm on pin H of the shelf connector (the LOS Alarm Bus). A managed HLU initiates an HMU alarm message over the digital management bus between the HLU and HMU. An unmanaged HLU or a T1 repeater triggers the HMU alarm by driving the LOS Alarm Bus to ground. Refer to the line unit's documentation for instructions on enabling the ALM option.

NETWORK COMMUNICATIONS

NETWORK PROTOCOL

ADC uses the standard Transmission Control Protocol/Internet Protocol (TCP/IP) on an Ethernet interface to send internal management information between chassis. The HMS-358 can support up to 32 chassis using a low-cost 10BASE-T twisted pair or 10BASE-2 coaxial cable Local Area Network (LAN). If only TAO software is used and there is no need to download multiplexer software, then either type of cable can be used. Systems that use TL1 or require download functions must use 10BASE-T. Additionally, larger systems using 10BASE-T require less troubleshooting than larger systems using other LAN protocols.

ADC recommends placing the HMS-358 on its own 10BASE-T LAN. Any connection to a larger network should be done through a router with the appropriate firewall protection. Selecting the IP address, subnet mask, TCP/IP server address and trap addresses are basically arbitrary, but some understanding of these functions is still required to make an informed choice.


HARDWARE ADDRESSES AND IP ADDRESSES

To communicate, physical networks rely on 48-bit hardware addresses known as Media Access Control (MAC) addresses. Every network interface adapter has a unique hardware address assigned by the manufacturer and coded into the circuitry. On a local network, each piece of equipment picks up data which is addressed to it. In order for one device to send data to another, it must know the hardware address of the destination device. This works fine for small networks, where devices can easily broadcast their names and addresses on the network and make it easy to find them, but it does not work well for large networks or for communication between devices on different networks.

To solve this problem, a higher level of address, called an IP address, is used to identify each device in the internet. IP addresses, unlike hardware addresses, are not burned into the electronics, but are configured in software after a device is plugged into a particular network. Each IP address is associated with a particular hardware device. For example, the HMU-319 in each HMS-358 shelf is programmed with a unique IP address that identifies each shelf. The IP address is a 32-bit digital address arranged as four 8-bit words, each from 0 to 255, separated by a period.

The IP address consists of two parts: the network ID (netid) and the host ID (hostid). The subnet mask determines which bits form the netid and hostid addresses. (See [Table 11.](#))

Table 11. Network Addressing

Subnet Mask	Class C
11111111 11111111 11111111 00000000 255.255.255.0	
IP Address	Class C
	
110nnnnn nnnnnnnn nnnnnnnn hhhhhhhh 200.200.200.1	

SUBNET MASK

A subnet is a physically separate part of a network, usually representative of all the devices at one geographic location or on the same LAN. The subnet mask is a quantity which is logically ANDed with an IP address to enable a device to determine which IP addresses are located on the local network and which addresses must go to the gateway for forwarding. An IP address of 200.200.200.1 and a subnet mask of 255.255.255.0, for example, indicate that only IP addresses, which start with 200.200.200, can be found on the local physical network, and that all other addresses must go through the gateway. (255 is the decimal representation of 8 bits of all ones.)

The subnet mask is also a 32-bit word, but it is generally a string of ones followed by a string of zeroes. Each subnet bit that has a one value identifies a corresponding bit of the IP address that is part of the netid. The zero bits identify the hostid. The netid is further divided into five classes from A to E. [Table 12](#) shows a Class C network address. Class C is recommended for most HMS-358 applications. All Class C addresses are identified by the first three bits (110). The hostid should not be assigned all ones or all zeroes.

Using the foregoing restrictions and conventions, an HMS-358 can be assigned any IP address that meets your needs, provided that it is on its own LAN and separated from any external network by a router. If this is not the case, then consult your system administrator. [Table 12](#) provides some suggestions for addressing your system if it is on its own LAN. It shows a logical relationship between the HMU in chassis #1 and the HMU in chassis #32.

Table 12. *Sample Class C IP Address Plan for the HMS-358*

Suggested HMU Addressing for 1 to 32 Chassis			
11001000	11001000	11001000	00000001
200.200.200.1	HMU chassis #1		
255.255.255.0	Subnet mask		
11001000	11001000	11001000	00100000
200.200.200.32	HMU chassis #32		
255.255.255.0	Subnet mask		

ROUTERS OR GATEWAYS

At the place where two or more physical networks interconnect is a device called a gateway or router that handles linking of networks and routing of data packets between the networks that are attached to the gateway. If a device cannot find the hardware address associated with a particular IP address on its own local network, it sends the packet on to the gateway. When the packet arrives at the gateway, the gateway transfers the packet to the network of the destination device. The process by which the gateway or router links IP addresses to hardware addresses is called Address Resolution Protocol (ARP). Each forwarding of the packet from one device to another is called a hop. If the device that is to receive the data is not directly connected to any of the physical networks, which are connected to the gateway used by the sending device, it may take several hops for the packet to reach its destination. The destination may even be a port on another gateway connected to different physical networks.

APPENDIX A - SYSTEM SPECIFICATIONS

INTERFACE SPECIFICATIONS

Figure 41 identifies the contacts for the common access panel. Table 13 lists the relay specifications. See “Wiring the Common Access Panel” on page 15 for wiring instructions.

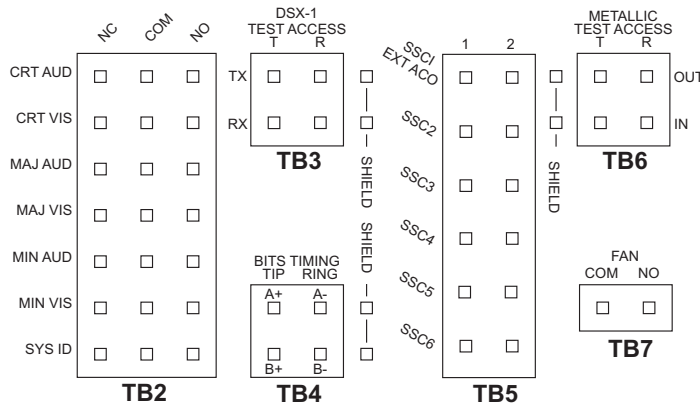


Figure 41. Common Access Panel (Specification)

All relay contacts are rated at 48 Vdc at 1A.

Table 13. Relay Specifications

Parameter	
Rated Load	0.5A at 125 Vac
Maximum switching capacity	62.5 VA, 33W
Contact type	bifurcated for high sensitivity

ENVIRONMENTAL SPECIFICATIONS

The HMS-358 is designed to meet NEBS CO requirements.

System Operating Temperatures

Minimum/Maximum Ranges	32°F to 122°F (0°C to +50°C)	-40°F to 149°F (-40°C to +65°C)
Line Units	All	All
Mux Units	HXU-357 List 1 HXU-359 List 1	All others
HMUs	HMU-319 List 7A	HMU-319 List 9

Operational Altitude

197 ft. (60m) below sea level to 13,000 ft. (3962m) above sea level

Relative Humidity

Operational	5% to 85% non-condensing
Short-term	5% to 90%
Non-operating	5% to 95%

Electromagnetic Compatibility

FCC Part 15, Class A, Subpart J; Bell TR EOP 000063, Section 4.10

PHYSICAL SPECIFICATIONS

Dimensions

12-¹/₈" H x 21-³/₈" W x 11-³/₄" D (30.8 x 54.3 x 30.5 cm)

Weight (unloaded)

37 lbs. (16.78 kg)

Chassis per 7-foot Rack

4

DS1 Capacity

28 lines

Power Feeds

-48 Vdc, A and B

POWER SPECIFICATIONS

CO Supply

-48 Vdc nominal (-41.5 Vdc to -56.5 Vdc)

Line Power to HDSL/HDSL2/HDSL4 Remote Unit

-180 Vdc or ±122 Vdc

POWER REQUIREMENTS

Each system must be individually fused to support redundant power feeds. The HMS-358 List 5 provides a split-power backplane to limit the current requirements of each battery feed line to less than 10A for any configuration. The HMS-358 List 6 provides a diode-ORed feed that requires system configurations that are limited to 20A per feed. For this reason, each battery feed line must be individually fused. However, fuse requirements may be as low as 5A per fuse, depending upon the system configuration.

The power requirement for the shelf is characterized by three different measurements:

- **Current draw** is the actual current drawn from the -48 Vdc Office Battery by the system. This is useful in setting the requirements for shelf fusing. It is the total power consumption divided by the lowest office battery voltage anticipated (-42.5 Vdc).
- **Power consumption** is the total power used by the system and including the power fed to the remote locations.
- **Power dissipation** is that part of the total power that is consumed by the CO end of the system. It represents the CO heating and is useful in calculating the power density (watts per square foot) for CO equipment.

The requirements in GR-63-CORE for a typical six-lineup floor plan (Figure 42) of 12-inch deep frames (305 mm) places the natural convection heat dissipation at 1450 W/m² (134.7 W/ft²). This is increased to 1950 W/m² if forced-air fans are used.

Each 23-inch (584mm) rack occupies 0.654m² (7.03 Ft²) of floor space. This allows 948W per rack without the optional fan assembly and 1275W with the fan assembly.

For a maximum load, each rack should contain no more than four HMS-358s. Higher rack densities can be obtained by installing the optional fan assembly in each system, by limiting the number of line doublers in each system, or by changing the floor lineup of the racks.

The Wideband 3190 has been designed to provide adequate convection cooling for an environment of 0°C to 50°C (32°F to 122°F) with up to 230W of internal heat dissipation.

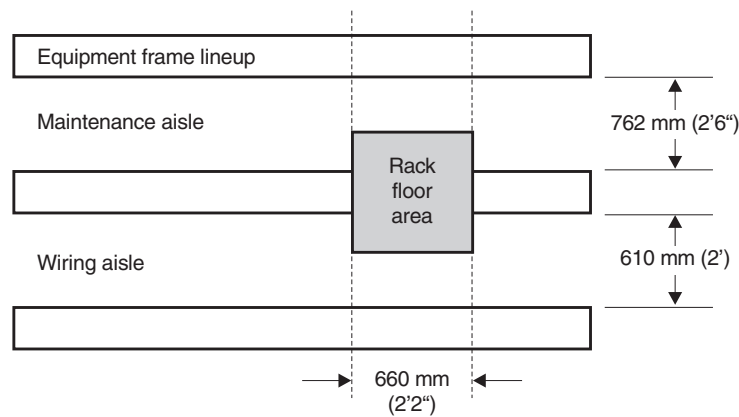


Figure 42. Typical Six-Lineup Floor Plan

A/B POWER SOURCES

Each chassis requires one A battery feed and one B battery feed rated at a maximum combined current of 30A total with no single battery feed to exceed 20A for fully loaded chassis assemblies capable of driving a full complement of doublers and remote units.

The A/B power feeds provide total backup power for the HXU, HMU, and HFA cards. The HMU, HXU, and optional HFA have diode-ORed power feeds.

For the HMS-358 List 5 chassis, the line units are powered as a split feed with half of the line units on each battery feed. A loss of one battery feed forces 14 lines out of service. This reduces the maximum current required per battery feed for systems with the maximum number of doublers.

For the HMS-358 List 6 chassis, the line units are powered from the backplane through diode-ORed power feeds. A loss of one power feed will not affect service.

FUSES

System fuses are located in an external fuse tray typically mounted at the top of the CO rack. The HMU reports all fuse alarms within the HMS-358. Each chassis within the rack must be equipped with A and B fuses for proper power protection. Depending upon the system configuration, fuse ratings can vary from 5A to 10A (HMS-358 L5) or 5A to 20A (HMS-358 L6). See [Table 14](#) and [Table 15 on page 78](#) for information about fuse selection and the maximum number of line units that can be operated in the shelf at a particular fuse size. Fuse sizes other than the ones shown may be estimated from the application environment and interpolated from the table entries.



ADC does not recommend configurations that require the use of 20A fuses total per shelf.

For fuse selection, refer to [Figure 43 on page 79](#) and [Figure 44 on page 84](#). These figures are based upon the following assumptions:

- Each chassis has a maximum of 28 lines installed for driving remote units.
- The maximum number of doublers per chassis is 84.

Table 14 shows the maximum recommended chassis fuse requirements for each feed in amps based on the number of doublers per chassis with split power feed and Table 15 shows the maximum recommended chassis fuse requirements for each feed in amps based on the number of doublers per chassis with redundant power feed.

Table 14. HMS-358 List 5 Split Power Shelf*

Number of Line Units and Doublers per battery feed (1/2 chassis) at 80% of given fuse rating	5A Fuse per battery feed (max)				10A Fuse per battery feed (max)			
	No HXU-xxx Multiplexers		2 HXU-xxx Multiplexers		No HXU-xx Multiplexers		2 HXU-xxx Multiplexers	
	Max. LUs per battery feed (1/2 chassis)	*Max. Doublers per battery feed (1/2 chassis)	Max. LUs per battery feed (1/2 chassis)	*Max. Doublers per battery feed (1/2 chassis)	Max. LUs per battery feed (1/2 chassis)	*Max. Doublers per battery feed (1/2 chassis)	Max. LUs per battery feed (1/2 chassis)	*Max. Doublers per battery feed (1/2 chassis)
Line Unit Type								
HLU-319-L5x	14	8	14	8	14	14	14	14
H2TU-C-319-L2, 3, 4x, 6x, 7x	14	N/A	14	N/A	14	N/A	14	N/A
H4TU-C-319-L1x	14	6	14	6	14	13	14	12
H4TU-C-319-L5x	14	7	14	7	14	14	14	13

* Each half of an HMS-358 L5 split power shelf (double number of cards per half to obtain total shelf capacity).

Table 15. HMS-358 List 6 Redundant Power Shelf

Number of Line Units and Doublers per battery feed (chassis) at 80% of give fuse rating	10A Fuse per battery feed (max)				20A Fuse per battery feed (max)			
	No HXU-xxx Multiplexers		2 HXU-xxx Multiplexers		No HXU-xx Multiplexers		2 HXU-xxx Multiplexers	
	Max. LUs per battery feed (chassis)	Max. Doublers per battery feed (chassis)	Max. LUs per battery feed (chassis)	Max. Doublers per battery feed (chassis)	Max. LUs per battery feed (chassis)	Max. Doublers per battery feed (chassis)	Max. LUs per battery feed (chassis)	Max. Doublers per battery feed (chassis)
Line Unit Type								
HLU-319-L5x	28	17	28	16	28	28	28	28
H2TU-C-319-L2, 3, 4x, 6x, 7x	28	N/A	28	N/A	28	N/A	28	N/A
H4TU-C-319-L1x	28	13	28	12	28	27	28	25
H4TU-C-319-L5x	28	14	28	14	28	28	28	28

Figure 43 on page 79 shows bay heat dissipation based on four chassis. Although the power requirements of the system can vary greatly depending on the line makeup, in practice the line makeup seldom requires more than 30% of the lines to have doublers. With this type of provisioning, power limitations due to CO heating are seldom a factor.

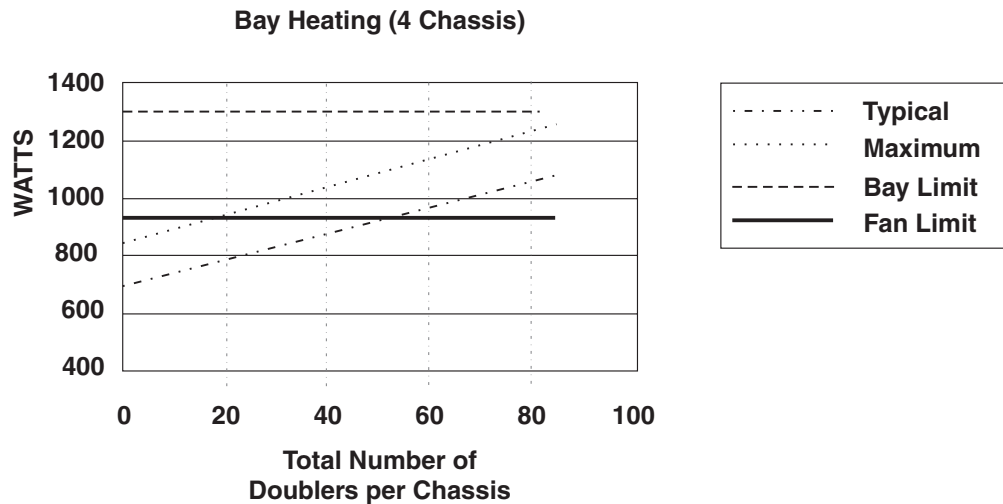


Figure 43. Bay Heating Based on Doublers per Chassis



Each HDSL2 line must be counted as one doubler when using Figure 43 to calculate heat dissipation.

FANS

For a 0°C to 50°C (32°F to 122°F) operating environment, a fan assembly is required for any of these situations:

- One system with $\geq 230\text{W}$ power dissipation
- Four systems with $\geq 948\text{W}$ power dissipation
- Extended temperature operation (65°C or 149°F)

No shelf configuration should exceed a total power dissipation $\geq 1275\text{W}$.

APPENDIX B - HMU CONFIGURATION FOR X.25 AND ETHERNET CONNECTIONS

OPERATING MODES

The HMU may be connected to an X.25 network through the OS port (J30 on the rear of the Wideband 3190), if properly configured. Regardless of the connection type (X.25, IP, or Serial), the HMU must be configured for one of two operating modes, Interactive or Network Management Administration (NMA). Depending on the mode selected, TAO (often referred to as the Craft screen interface) and TL1 communications are supported.

Interactive Mode

The Interactive Mode is intended for human interface and supports both TAO and TL1 communication. The HMU echoes input from the user in a conventional command line interface. If the user enters a partial TL1 command, the HMU prompts the user for additional input to formulate a complete TL1 command.

NMA Mode

NMA Mode is used for communication with the Telcordia NMA Operational Support System and supports TL1 communication only. (TAO is not supported.) NMA Mode does not echo any input and does not automatically complete partial TL1 commands. The HMU expects a complete TL1 command that is terminated by a semicolon (;). The Ethernet Port (J34 on the rear of the Wideband 3190) may also be used for NMA mode as an alternative to the X.25 OS port. Refer to “[Ethernet Port Configuration Procedure](#)” on page 83 for further details.

X.25 PORT CONFIGURATION PROCEDURE

Initial configuration of the OS port for X.25 operation requires that the user log on to the HMU through a different physical port (Serial or Ethernet). Once the user is logged on to the HMU through one of these ports, configuration of the OS port for X.25 operation is accomplished through the HMU Craft screens or by using TL1 commands.



Configuring the OS port through the HMU Craft screens is easier than using TL1 commands.

X.25 Port Configuration Using Craft Screens

The OS port is configured for X.25 operation through the HMU Shelf Options screen, Port Setting (option P). Only Interactive Mode supports TAO.

- 1 Connect to the HMU through either the Serial or Ethernet port. If connected to the Serial port, use a PC running HyperTerminal; if connected to the Ethernet port, use a Telnet session.
- 2 Type `TAO`, then press **ENTER**. If prompted for a password, type `public`, then press **ENTER**. The Network Status screen displays
- 3 Type the number of the shelf to be configured for X.25. The Shelf Status screen displays
- 4 Press **○** to access the Shelf Options screen.

- 5 From the Shelf Options screen, press **P**, then press **2** to select the OS port. The port settings display
- 6 Confirm that Baud Rate is set at 9600. If the baud rate is not set at 9600, press **A**, then press **1** to select 9600 baud.
- 7 Confirm that Character Size is set at 8. If the character size is not set at 8, press **B**, then press **2** to select 8 bits.
- 8 Confirm that Parity Bits is set at None. If the parity bits is not set at None, press **C**, then press **1** to select None.
- 9 Confirm that Stop Bits is set to 1. If the stop bits is not set to 1, press **D**, then press **1** to select 1.
- 10 Confirm that User Type is set to X.25 (Interactive Mode) or X.25NMA (NMA Mode). To change the user type, press **E**, then press **4** (Interactive Mode) or **5** (NMA Mode).
- 11 Press **X** to exit and return to the Shelf Options screen.
- 12 From the Shelf Options screen, press **X** to exit and return to the Shelf Status screen. A message appears prompting the user to reset the HMU if changes have been made to any of the shelf options. For changes to take effect, press **Y** to reset the system. The OS port is now configured for X.25.



For all X.25 connections to the HMU through the OS port, the HMU behaves in either Interactive Mode or NMA Mode, depending on the User Type setting (see Step 10 above).

X.25 Configuration Using TL1 Commands

The following steps describe how to configure the OS port for X.25 using TL1 commands.

- 1 Connect to the HMU through either the Serial or Ethernet port. If connected to the Serial port, use a PC running HyperTerminal; if connected to the Ethernet port, use a Telnet session.
- 2 Log on to the HMU with the following ACT-USER command:
ACT-USER :: SUPERUSER ::: PUBLIC#1;
- 3 Configure the OS port for X.25 in Interactive Mode or NMA Mode using the following applicable ED-PORT commands:

For Interactive Mode:

```
ED-PORT::PORT-2:::USERTYPE=X.25:MA;
```

For NMA Mode:

```
ED-PORT::PORT-2:::USERTYPE=X.25NMA:MA;
```

The HMU responds with the following four lines of text:

Line 1: contains the Target Identifier followed by the Date and Time

Line 2: M 0 COMPLD

Line 3: /* NOTE: Changes will not take effect until HMU has been cycled.*/

Line 4: ;

- 4 For the new configuration to take effect, reset the HMU using the following TL1 command:

```
INIT-SYS::HMU:::0;
```

The HMU responds with the following message:

“INIT-SYS: System will be reset now, please wait . . .”

X.25 Parameter Configuration

The X.25 implementation of the HMU uses a fixed packet size of 128 bytes and cannot be changed. The HMU does not support X.25 packet size negotiations.

By default, the HMU supports two Permanent Virtual Circuits (PVCs) and eighteen Switched Virtual Circuits (SVCs). The HMU can be configured to support a specific number of PVCs and SVCs, but these parameters cannot be configured using TL1 commands. In order to configure the number of PVCs and SVCs, the user must run TAO.

The following steps describe how to configure the number of PVCs and SVCs.

- 1 Connect to the HMU through a port configured for Interactive Mode. If connected to the Serial port, use a PC running HyperTerminal; if connected to the Ethernet port, use a Telnet session.
- 2 Type TAO, then press **ENTER**. If prompted for a password, type `public`, then press **ENTER**. The Network Status screen displays.
- 3 Type the number of the shelf to be configured. The Shelf Status screen displays
- 4 From the Shelf Status screen, press **L** to select X.25 Management.
- 5 From the X.25 Management screen, press **B** to select CUP Parameters. The CUP Parameters screen displays with the following default settings (see [Table 16](#) below for a description of the line indicators):
 - (A) B-Channel One 2-way Minimum LCI: 1
 - (B) B-Channel One 2-way Maximum LCI: 20
 - (C) Maximum Number of PVC Supported: 2
 - (D) PVC0 - Logical Channel Identifier: 1
 - (E) PVC1 - Logical Channel Identifier: 2

Table 16. CUP Parameters Line Descriptions

Line Indicators	Description
(A)	Information on logical channels and circuits.
(B)	Information on logical channels and circuits. Indicates that the HMU is currently configured to support up to 20 virtual circuits.
(C)	Information on PVC. Indicates that the HMU is currently configured for 2 PVCs.
(D)	Information on PVC. Indicates that the first PVC is assigned Logical Channel 1
(E)	Information on PVC. Indicates that the second PVC is assigned Logical Channel 2.

If no PVC connections are requested from the network, all twenty virtual circuits are available for SVC. The SVCs are assigned Logical Channel 1 through 20.

If PVC connections are established, the number of SVCs supported by the HMU is either eighteen or nineteen, depending on whether one or two PVCs were established.

- 6 To modify any of the parameters, select the line indicator (**A** through **E**), and enter the appropriate value.
- 7 Press **X** to return to the X.25 Management screen, then press **ESC** to return to the Shelf Status screen. If changes have been made, a message appears prompting the user to save the changes and reset the HMU. To save the changes and reset the HMU, press **Y**.

Additional X.25 Parameter Configuration

In addition to PVC and SVC, the following additional X.25 parameters may be modified. The default settings are indicated in parentheses.

Setting	Default
Max frame size	(142)
Layer 2 Restart Timer	(180)
Layer 2 Window Size	(7)
Acknowledge Timer	(5)
Number of Max Retransmit Attempts	(10)

These parameters display on the X.25 Management screen, Line Parameters (option A) selected. Accessing these parameters is similar to accessing PVC and SVC (see “X.25 Parameter Configuration” on page 82).



If these parameters are not properly configured or do not match the equipment settings on the other end of the X.25 connection, the performance of the HMU will be adversely affected. Only knowledgeable personnel should attempt to configure these parameters.

Ethernet Port Configuration Procedure

The Ethernet port (J34 for 10BASE-T and J32 for 10BASE-2 on the rear of the Wideband 3190) may be used in either Interactive Mode or NMA Mode. Unlike the X.25 port, the operating mode of the Ethernet port is not configured by the user, but is determined by the TCP port opened by the client application.

The following table shows the TCP port number and the operating mode.

TCP Port Number	Operating Mode
TCP Port 23	Interactive Mode
TCP Port 42462	NMA Mode

The HMU cannot operate both 10BASE-T and 10BASE-2 simultaneously. The user must use the Craft screens through the HMU serial port to select the appropriate physical interface. (Refer to the *HMU-319 User Manual*, document LTPH-UM-1086-xx, for a detailed Ethernet configuration procedure.)

APPENDIX C - OPTIONAL WIRE-WRAPPING PORT CONNECTIONS

Figure 44 provides a guideline for wire-wrapping the HMS-358 List 5 and List 6 chassis to support wire-wrapped DSX-1 applications. The wire-wrapping option shown in Figure 44 is for use with four-wire 3192 line units in Central Office (CO) systems.

Group 1 (Port 1) connections typically provide a four-wire connection to the field and can be made through P11 (TX) and P12 (RX) or through wire-wrap connections under the field access cover (Figure 44). Group 2 (Port 2) connections can be accessed through four wire-wrap posts under the field access cover.

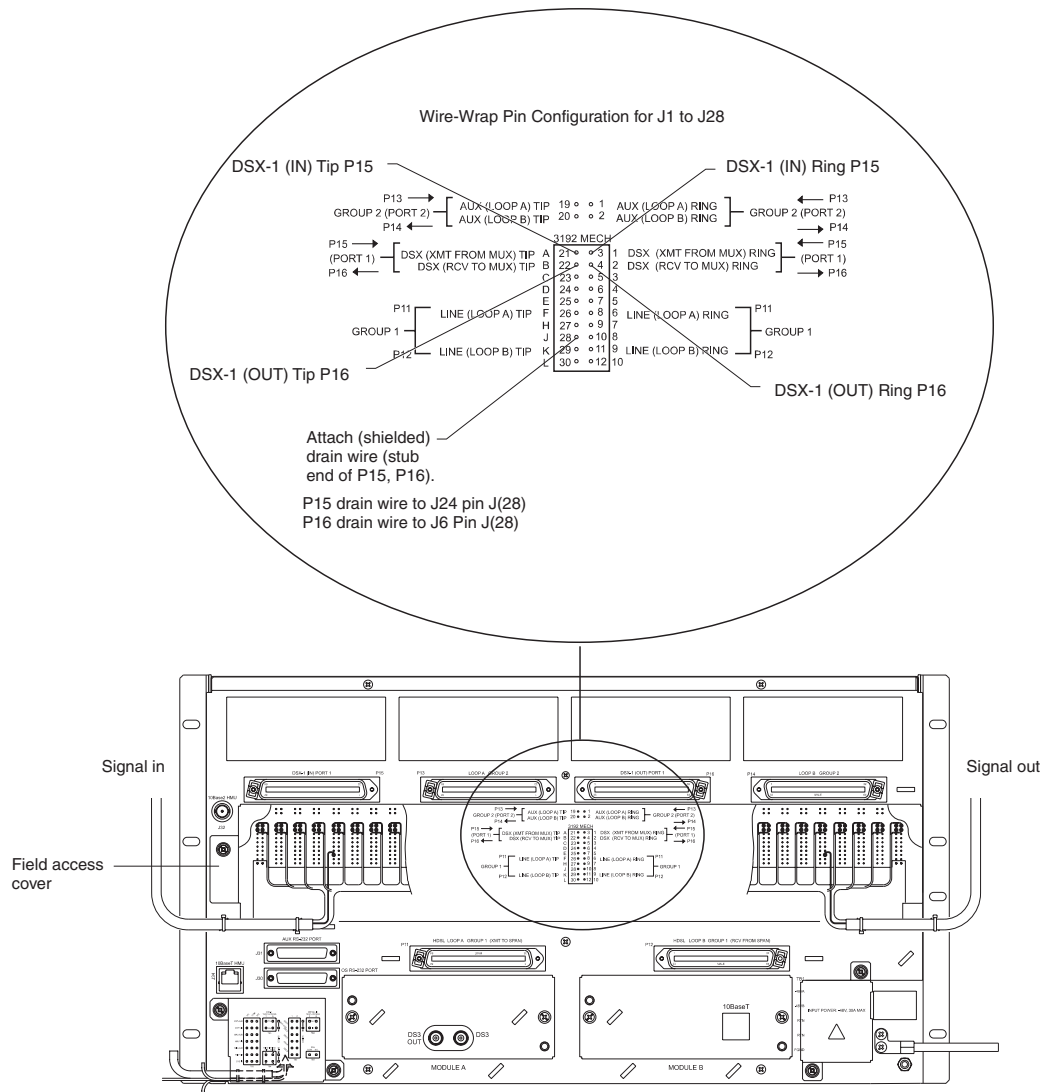



Figure 44. Wire-Wrapping the HMS-358 List 5 and List 6 Chassis



- If P15 and P16 cables are connected, no multiplexer can be installed.
- If a multiplexer is installed, P15 and P16 cables cannot be connected.

Step	Procedure	Installer Check ✓
<div style="display: flex; align-items: center;">  <p>Wear an antistatic wrist strap and connect it to the ESD strap input.</p> </div>		
1	To remove the field access cover (Figure 44 on page 84), loosen the 4-40 PH screw, slide the cover to the right, and lift it away from the chassis.	<input type="checkbox"/>
2	Perform the required wire-wrapping procedures determined by CO management. Figure 45 shows how the cable will be routed under the cover and to the field access area.	<input type="checkbox"/>
3	Replace the field access cover by aligning the cover with the notch and sliding it into place.	<input type="checkbox"/>
4	Secure the field access cover with the 4-40 PH screw.	<input type="checkbox"/>

Installer Signature 

Date

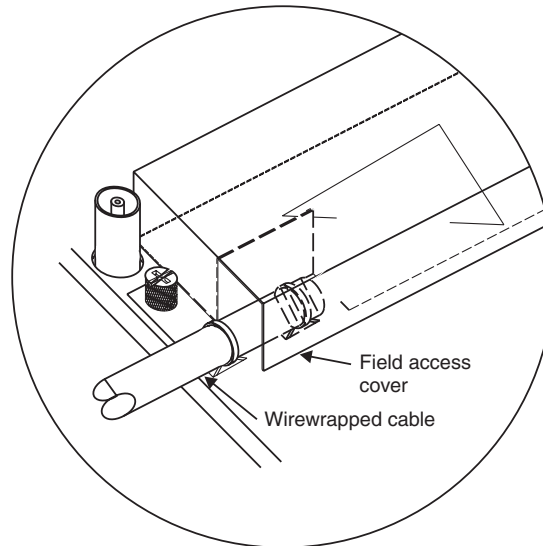



Figure 45. Routing Cables Under the Field Access Cover

APPENDIX D - TECHNICAL REFERENCE

SYSTEM COMPONENTS AND COMPATIBILITY

The HMS-358 is an open platform based on the standard 3192 line card and compatible components (see [Table 17](#)). However, due to FCC and NEBS testing guidelines, compliance is not guaranteed with all vendors when tested as a system. ADC has verified that all its standard line units are in compliance (see [Table 18 on page 87](#)) with these guidelines when tested as a system in the HMS-358 shelf. It is the customer's responsibility to verify that other vendor's equipment meets system-level compliance when installed in the HMS-358 chassis.

Table 17. System Components

Check ✓	Item	Catalog Number	Installer Initial 
Management Unit (one required)			
<input type="checkbox"/>	Management card, 0 to 50°C	HMU-319L7AV307, HMU-319L7AV31	_____
<input type="checkbox"/>	Management card, -40°C to 50°C	HMU-319L9V307, HMU-319L9V31	_____
Multiplexer (two of the same type required for line protection)			
<input type="checkbox"/>	STS-1 multiplexer	HXU-359L2V11	_____
<input type="checkbox"/>	DS3 multiplexer	HXU-358-V104	_____
<input type="checkbox"/>	DS3 multiplexer	HXU-360 L1	_____
Line Units			
<input type="checkbox"/>	HDSL line units for 3190 mechanics	HLU-319 List 1, List 2x, List 5x	_____
<input type="checkbox"/>	HDSL2 line units for 3190 mechanics	H2TU-C-319 List 2, List 3, List 4x	_____
<input type="checkbox"/>	HDSL4 line unit for 3190 mechanics	H4TU-C-319 List 1	_____
<input type="checkbox"/>	HDSL E1 line unit for 3190 mechanics	ELU-319 List 5x	_____
Doubler Units			
<input type="checkbox"/>	HDSL doubler unit for 239 T1 repeater mechanics	HDU-409	_____
<input type="checkbox"/>	HDSL doubler unit for DDS/ISDN single-slot	HDU-407	_____
<input type="checkbox"/>	HDSL doubler unit for 400 mechanics, low power	HDU-404	_____
<input type="checkbox"/>	HDSL4 doubler unit for 239 T1 repeater mechanics	H4D-409	_____
Remote Unit			
<input type="checkbox"/>	HDSL remote unit for 200 mechanics	HRU-402	_____
<input type="checkbox"/>	HDSL2 remote unit for 200 mechanics	H2TU-R-402	_____
<input type="checkbox"/>	HDSL4 remote unit for 200 mechanics	H4TU-R-402	_____
Central Office Equipment			
<input type="checkbox"/>	Wideband 3190 fan assembly	HFA-357-L1	_____
<input type="checkbox"/>	Wideband 3190 air filter	HFA-357-FIL	_____
Cables			
<input type="checkbox"/>	Cable stub (50 foot)	HCA-532-L1	_____
<input type="checkbox"/>	Cable stub (200 foot)	HCA-532-L2	_____
Test/Support Cards			
<input type="checkbox"/>	Cut-through card (for local DSX-1 drops)	HCC-319-L1	_____
<input type="checkbox"/>	Cut-through card (for Port 2 support)	HCC-319-L2	_____
<input type="checkbox"/>	Test card	HTC-319-L1	_____

COMPLIANCE STANDARDS

Table 18. Compliance Standards

Standard	Description
GR-499-CORE Issue 1, December 1995	Transport System Generic Requirements (TSGR): Common Requirements
GR-63-CORE Issue 1, October 1995	New Equipment-Building System (NEBS) Generic Equipment Requirements
GR-1089-CORE Issue 1, July 1994 Rev 1, December 1996	Electromagnetic Compatibility and electrical Safety Generic Criteria for Network Telecommunication Equipment
SR-3580, Level 3 NEBS	Bellcore's highest level of compliance for CO environment
TR-NWT TA-TSY-000199 Issue 4, November 1988	Specifications of Memory Administration Messages at the Operations System/Network Element Interface, Bellcore (TL1)
GR-454 TR-TSY-000454 Issue 1, July 1988	Supplier Documentation for Network Elements
FR-NWT-000482 TR-TSY-000482	OTGR, Operations Applications Messages Directory (TL1)
TR-TSY-000825 Issue 2, February 1988.	OTGR, User System Interface - User System Language, Bellcore (Craft interface and is compatible with TL1)
TR-TSY-000827 Issue 1, November 1988	OTGR, Generic Operations Interface: Non-OSI Communications Architecture, Bellcore (TPM1 is the minimum OSI stack with TP over X.25 and is used to carry TL1)
GR-833 TR-TSY-000833 Issue 2, February, 1988	OTGR, Operations Applications Messages - Network Maintenance: Network Element and Transport Surveillance Messages, Bellcore. (TL1)
GR-78 TR-NWT-000078 Issue 3, December 1991	Generic Physical Design Requirements for Telecommunication Products and Equipment
TR-TSY-000191 Issue 1, May 1986	Alarm Indication Signal Requirements and Objectives
PUB 49001 July 1982	Requirements for Compatibility or Telecommunication Equipment with Bell Systems Surveillance and Control Systems
PUB 49002 July 1982	General Remote Surveillance Philosophy and Criteria for Interoffice Transmission Equipment
ANSI T1.102-1987	Digital Hierarchy-Electrical Interfaces
ANSI T1.404-1989	Carrier to Customer Installation - DS3 Metallic Interface
ANSI T1.107-1988 ANSI T1.107a-1990	American National Standard for Telecommunication- Digital Hierarchy- Formats Specifications (DS3 format)

APPENDIX E - PRODUCT SUPPORT

ADC Customer Service Group provides expert pre-sales and post-sales support and training for all its products. Technical support is available 24 hours a day, 7 days a week by contacting the ADC Technical Assistance Center.

Sales Assistance

800.366.3891

(USA and Canada)

- Quotation Proposals
- Ordering and Delivery
- General Product Information

Systems Integration

800.366.3891

(USA and Canada)

- Complete Solutions (from concept to installation)
- Network Design and Integration Testing
- System Turn-Up and Testing
- Network Monitoring (upstream or downstream)
- Power Monitoring and Remote Surveillance
- Service/Maintenance Agreements
- Systems Operation

ADC Technical Assistance Center

800.366.3891

Email: wsd.support@adc.com

- Technical Information
- System/Network Configuration
- Product Specification and Application
- Training (product-specific)
- Installation and Operation Assistance
- Troubleshooting and Repair/Field Assistance

Online Technical Support

- www.adc.com/Knowledge_Base/index.jsp

Online Technical Publications

- www.adc.com/documentationlibrary/technicalpublications/

Product Return Department

800.366.3891

Email: repair&return@adc.com

- ADC Return Material Authorization (RMA) number and instructions must be obtained before returning products.

All telephone numbers with an 800 prefix are toll-free in the USA and Canada.

APPENDIX F - ABBREVIATIONS

A

ACO: Alarm Cutoff
AIS: Alarm Indication Signal
ALM: Alarm
AMI: Alternate Mark Inversion
ASCII: American Standard Code for Information Interchange

B

B8ZS: Binary 8 Zero Substitution
BER: Bit Error Rate

C

CDU: Customer Doubler
CLOC: Customer Local Loopback
CO: Central Office
CR: Critical Alarm
CREM: Customer Remote Loopback

D

DACS: Digital Access Cross-connect System
DCE: Data Communication Equipment
DS3: Digital Signal 3
DSU/CSU: Digital Service Unit/Channel Service Unit
DSX-1: Digital Signal Cross-connect Level 1
DTE: Data Terminal Equipment

E

EMI: ElectroMagnetic Interference
ESD: Electrostatic Discharge

F

FGND: Frame Ground
FLB: Facility Loopback

H

HDSL: High-bit-rate Digital Subscriber Line

HFA: HiGain Fan Assembly
HLU: HiGain Line Unit
HMU: HiGain Management Unit
HRU: HiGain Remote Unit

I

IP: Internet Protocol
IS: In-Service

L

LED: Light Emitting Diode
LLOS: Local Loss of Signal

M

MAL1: Margin Alarm 1
MAL2: Margin Alarm 2
MDF: Main Distribution Frame
MJ: Major Alarm
MN: Minor Alarm
MOP: Method of Procedure

N

NDU: Network Loopback
NEBS: Network Equipment-Building System
NID: Network Interface Device
NLOC: Network Local Loopback
NREM: Network Remote Loopback

O

OOS: Out of Service
OSTS: Open Span Termination System

P

PBX: Private Branch Exchange
PVC: Permanent Virtual Circuit

R

RAI: Remote Alarm Indication
RFL: Remote Facility Loopback
RLOS: Remote Loss of Signal
RTL: Remote Terminal Loopback

S

S1: Slide Switch
SELV: Safety Extra Low Voltage
SID: Shelf Identifier
SSC2: Special Signaling Channel 2
STS-1: Synchronous Transport Signal 1
SVC: Switched Virtual Circuit

T

TAO: Terminal Access Option
TL1: Transaction Language 1
TLB: Terminal Loopback
TLOS: Transmit Loss of Signal

V

VTG: Virtual Tributary Group
VTS: Virtual Tributary Slot


X

X.25: Communications network standard

PROJECT MEMBER SIGNATURES

Complete the following table by printing the title and name of each project member followed by their signature. This list may then be removed and stored for future reference.

Table 19. Signatures

Title	Name	Signature 

INSTALLATION VERIFICATION BY SECTION

Reviewed Installation Plans

(see "Reviewing Installation Plans" on page 4)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Established Method of Procedure

(see "Establishing a Method of Procedure" on page 4)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Unpacked and Inspected System Components

(see "Unpacking and Inspecting the System Components" on page 5)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Verified Presence of Proper Tools and Supplies

(see "Before You Begin" on page 4)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date



Reviewed Safety Precautions

(see "Safety Warnings and Notices" on page v)

Check ✓ if not applicable

Shift Supervisor Signature 

Date

Mounted Chassis

(see "Mounting the Chassis" on page 6)

Check ✓ if not applicable

Shift Supervisor Signature 

Date

Installed LIU Module B

(see "Cabling the Chassis" on page 8)

Check ✓ if not applicable

Shift Supervisor Signature 

Date

Cabled Chassis

(see "Cabling the Chassis" on page 8)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Wired Common Access Panel

(see "Wiring the Common Access Panel" on page 15)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Connected Ground Cable

(see "Wiring the Common Access Panel" on page 15)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Connected Power Cables

(see "Installing the Power Cables" on page 17)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Connected to Network Interface

(see "Connecting the Network Interface" on page 20)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Installed Management Unit

(see "Installing Multiplexers" on page 33)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Installed Multiplexer(s)

(see "Installing Multiplexers" on page 33)

Check ✓ if not applicable

Shift Supervisor Signature ✍

Date

Installed Fan Assembly

(see "Installing a Fan Assembly (Optional)" on page 53)

Check if not applicable

Shift Supervisor Signature 	Date
--	------

Installed Line Card(s)

(see "Installing a Line Unit (HLU)" on page 55)

Check if not applicable

Shift Supervisor Signature 	Date
--	------

Installed Remote Unit(s)

(see "Installing a Remote Unit (HRU)" on page 57)

Check if not applicable

Shift Supervisor Signature 	Date
--	------

Set Up Circuit ID(s)

(see "Setting Up Circuit IDs" on page 59)

Check if not applicable

Shift Supervisor Signature 	Date
--	------

Placed Line(s) In Service

(see "Placing the Line Unit in Service at the HXU" on page 61)

Check if not applicable

Shift Supervisor Signature 	Date
--	------

Page Intentionally Left Blank

INDEX

Numerics	
10BASE-2	21
multishelf configuration	26
10BASE-T	22
multishelf configuration	25
single shelf configuration	24
10BASE-T, Module B	9
A	
Addresses, hardware and IP	77
Air flow	4
Alarms	
HMU	74
HXU	75
line units	75
wiring	17
Alarms, managing	74
AUX port	37
B	
Bits Timing block	17
C	
Chassis	
installation	7
powering	18
Checklist	97
Circuit IDs	62
Clock synchronization source	17
Common access panel	17
Compatibility	91
Compliance	92
Components, system	5
Connectors	
cable pinouts	11, 12
P10	9
P11	14, 15, 16
P12	14, 15, 16
P13	16
P14	16
P15	15
P16	15
P9	9
Craft port	29, 48
Cross-connect	69
Cut-through Card	69
Cut-through card	72
D	
DB-25 AUX (DTE)	23
DB-25 OS Interface (DTE)	22
DS1 services, configuring	44
DS3 interface, installation	14
DS3 transport, placing in service	40
DSX-1 (Port 1) interface	15
DSX-1 (Port 2) interface	16
E	
ELV	iv
Environmental specifications	80
Ethernet connection	34
F	
Fan	
installation	57
placing under HMU management	58
Fan block, TB7	17
FCC compliance	105
Ferrite clamp	19
Field access cover	90
Fuse panel	20
G	
Gateways	78
H	
Hardware addresses	77
HCC	72
HLU	

installation 59

placing line in service 63

placing under HMU management 63

HMU

alarms 74

configuration 32

connecting to craft port 29

date and time 33

installing 28

placing HLU under management 63

setting the date and time 33

setting the Ethernet connection 34

setting the local IP address 34

setting the shelf ID 33

HRU, installation 61

HTC 71

HXU alarms 75

HXU-357

basic system parameters 38

communications channel 37

configuring the DS3 transport 40

DS1 services 39

enabling alarms 65

installation 36

placing the DS3 transport in service 40

HXU-358

configuring DS1 services 44

enabling alarms 67

entering Card ID 43

installation 41

setting up basic system parameters 42

HXU-359

configuring DS1 services 53

configuring STS-1 transport 55

enabling alarms 68

entering card ID 50

installation 48

setting up basic system parameters 49

setting up system clock synchronization 51

I

Installation

alarm relay wiring 17

AUX port 37

cable ties 10

chassis 7, 8

Circuit IDs 62

Common access panel 17

drain wire 10

DS3 14

DSX-1 (Port 1) 15

DSX-1 (Port 2) 16

fan assembly 57

HLU 59

HMU 28

HRU 61

HXU-357 36

HXU-358 41

HXU-359 48

IP address 6

LIU Module B 9

method of procedure 4

placing line in service at HXU 64

placing line in service at HXU-357 64

placing line in service at HXU-358 66

placing line in service at HXU-359 68

placing the HLU under management 63

power cable 18

power requirements 81

powering the 3190 chassis 18

remote unit 61

selecting the proper installation procedures 13

STS-1 14

test card 72

Interface specifications 79

Interfaces

10BASE-2 21

10BASE-T 22

DB-25 AUX (DTE) 23

DB-25 OS Interface (DTE) 22

IP addresses	6, 77	R	Returns	93
			Routers	78
		L		
Line Unit			S	
alarms	75		Safety warnings and notices	iv
Testing	73		SELV	iv
verification of downstream device	73		Shelf Identifier	33
Line, placing in service	63		Wideband 3190	
LIU			functional diagram	2
Module B installation	9		SONET clock synchronization source	17
requirements	8		Space requirements	4
Local IP address	34		Specifications	79
Loopbacks	69		environmental	80
		M	interface	79
M13	74		physical	80
Maintenance terminal, configuring	29		Standards compliance	105
Management interface			STS-1 Interface	14
Ethernet connection	34		STS-1 transport	55
HMU date and time	33		Subnet mask	78
local IP address	34		Switch block	48
Shelf Identifier	33		System loopbacks	69
Method of procedure	4		System products	91
Module B	9		System tests	69
Multiplexer				
HXU-357	36		T	
HXU-358	41		TAO	30
HXU-359	17, 48		TB1, power connector	18, 19
installation	35		TB4, Bits Timing block	17
			TB5, User Configurable Alarm Inputs block	17
		N	TB7, fan block	17
Network interface, connecting	21		Technical Support	93
Network protocol	77		Terminal Access Option (TAO)	30
			Test access points	69
		O	Test card	71, 72
OS port	29		TL1	30
			Trap IP address	78
		P	Troubleshooting	69
Physical specifications	80			
Power Access connector	20		U	
Power cable	18		Unpacking the system	5
Power requirements	80, 81		User Configurable Alarm Inputs block	17
Power sources	82			

V

Verification 73

W

Wirewrapping, non multiplexer applications 89

Wiring, fuse panel 20

X

X.25 network 27

CERTIFICATION AND WARRANTY

FCC COMPLIANCE

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

LIMITED WARRANTY

ADC DSL Systems, Incorporated (“ADC”) warrants that, for a period of sixty (60) months from the date of shipment, the hardware portion of its products will be free of material defects and faulty workmanship under normal use. ADC’s obligation, under this warranty, is limited to replacing or repairing, at ADC’s option, any such hardware product which is returned during the 60-month warranty period per ADC’s instructions and which product is confirmed by ADC not to comply with the foregoing warranty.

ADC warrants that, for a period of 90 days from the date of purchase, the software furnished with its products will operate substantially in accordance with the ADC published specifications and documentation for such software. ADC’s entire liability for software that does not comply with the foregoing warranty and is reported to ADC during the 90-day warranty period is, at ADC’s option, either (a) return of the price paid or (b) repair or replace of the software. ADC also warrants that, for a period of thirty (30) days from the date of purchase, the media on which software is stored will be free from material defects under normal use. ADC will replace defective media at no charge if it is returned to ADC during the 30-day warranty period along with proof of the date of shipment.

The transportation charges for shipment of returned products to ADC will be prepaid by the Buyer. ADC will pay transportation charges for shipment of replacement products to Buyer, unless no trouble is found (NTF), in which case the Buyer will pay transportation charges.

ADC may use reconditioned parts for such repair or replacement. This warranty *does not* apply to any product which has been repaired, worked upon, or altered by persons not authorized by ADC or in ADC’s sole judgment has been subjected to misuse, accident, fire or other casualty, or operation beyond its design range.

Repaired products have a 90-day warranty, or until the end of the original warranty period—whichever period is greater.

ADC DISCLAIMS ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO ITS PRODUCTS AND ANY ACCOMPANYING WRITTEN MATERIALS. FURTHER, ADC DOES NOT WARRANT THAT SOFTWARE WILL BE FREE FROM BUGS OR THAT ITS USE WILL BE UNINTERRUPTED OR REGARDING THE USE, OR THE RESULTS OF THE USE, OF THE SOFTWARE IN TERMS OF CORRECTNESS, ACCURACY, RELIABILITY OR OTHERWISE.

MODIFICATIONS

Any changes or modifications made to this device that are not expressly approved by ADC DSL Systems, Inc. voids the user’s warranty. All wiring external to the products should follow the provisions of the current edition of the National Electrical Code.

STANDARDS COMPLIANCE

This equipment has been tested and verified to comply with the applicable sections of the following standards:

- GR 63-CORE - Network Equipment-Building System Requirements: Physical Protection
- GR 1089-CORE - Electromagnetic Compatibility and Electrical Safety

For technical assistance, refer to “Appendix E - Product Support” on page 88.

World Headquarters

ADC Telecommunications, Inc.
PO Box 1101
Minneapolis, MN 55440-1101 USA

Technical Assistance

Tel: 800.336.3891

DOCUMENT: LTPH-SM-1052-05

